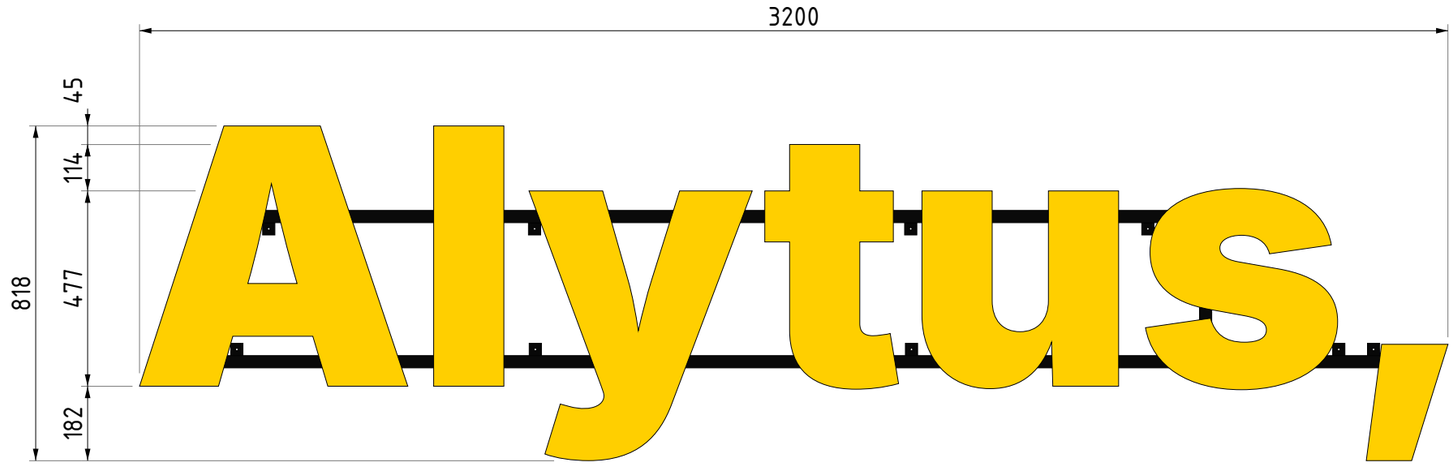

FRONT VIEW

SCALE 1:15

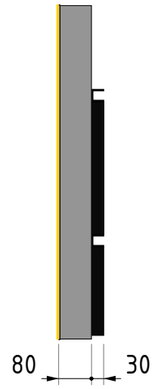

SIDE VIEW (RIGHT)

SCALE 1:15

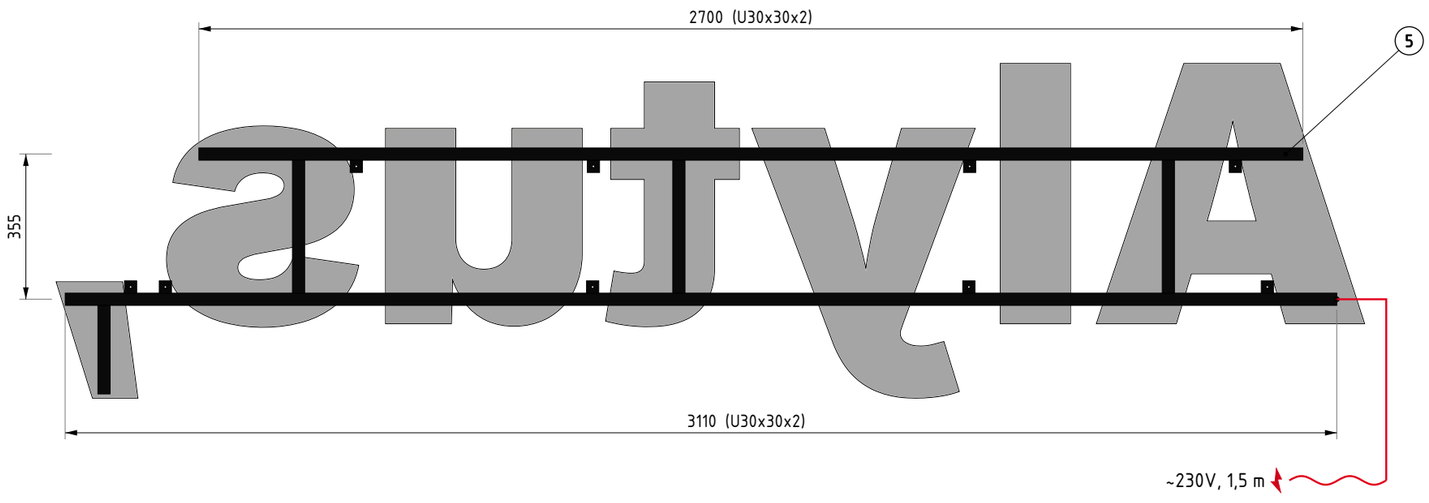

REAR VIEW (MIRRORED)

SCALE 1:15 | true view from the back

3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P6 ON RAILS – TYPICAL SECTION



BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face	Acrylic 8 mm white	white	15,48 m / 2,01 m²
	Front foil ORACAL 8500 021 Yellow	translucent foil	021 Yellow	1190 mm x 1,71 m = 2,04 m² (nesting)
2	Letter return	Alu 1 mm	RAL 9006	15,48 m / 1,54 m²
3	Letter back	Alu 1,5 mm	RAL 9006	15,48 m / 1,92 m²
4	LED modules			
5	Rail U 30 x 30 x 2 mm with ears	Aluminium	RAL 9005 matt	7,00 m
6	Mounting ear 30 x 30 x 2 mm, Ø6 mm hole	Aluminium	RAL 9005 matt	9 pcs. (0 extended)
7	El. output ~230V, rail end left bottom	cable 1,5 m	-	1 pcs.
8	PSU inside sign			
9	Wall fixing		-	

MAIN DATA

Quantity	
Overall size	3200 x 818 mm
Profile	P6 on rails
Letter depth	80 mm
Face	P6_8mm + ORACAL 8500 021
Returns	RAL 9006
Font	Arial Black
Rails	U 30 x 30 x 2 mm + ears, RAL 9005
Illumination	LED
Power	~230V, 1,5 m, left bottom
Wind qp	0,56 kN/m²
Weight (calc.)	≈ 21 kg / pcs, excl. PSU

REVISIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT: **TEST**

TITLE: Alytus, – illuminated letters P6 on rails

ORDER NO.: **ALT0000_00.00_RS**

FILE / DRAWING NO.: TEST Alytus P6

SCALE: 1:15 | FORMAT: A3 | REV. A | PROJECTION

DATE: 2026-10-13

Sheet 1 / 1