
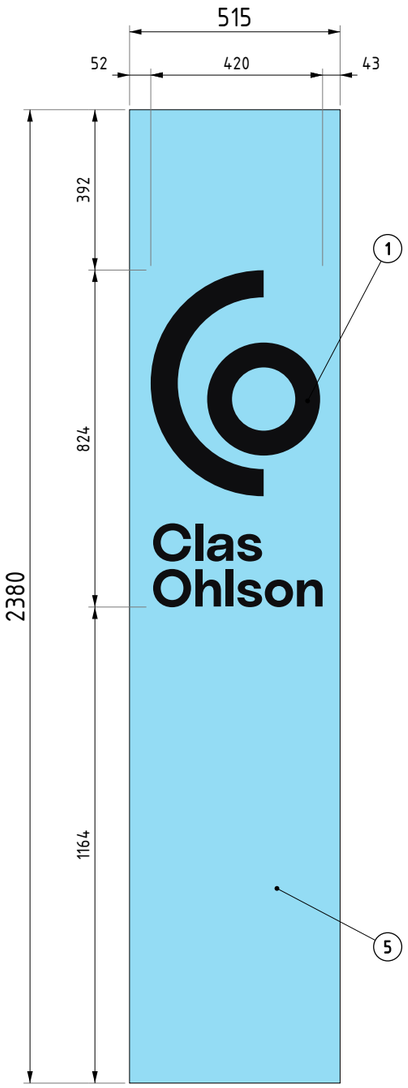



FRONT VIEW

SCALE 1:15

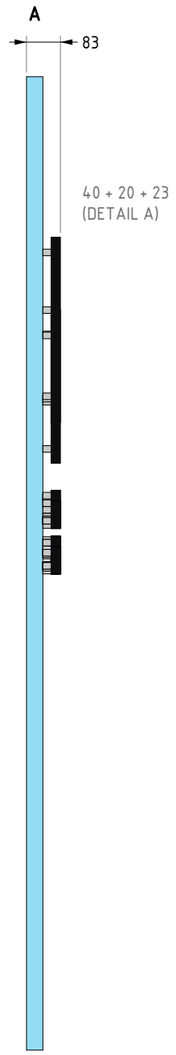


SIDE VIEW

SCALE 1:15

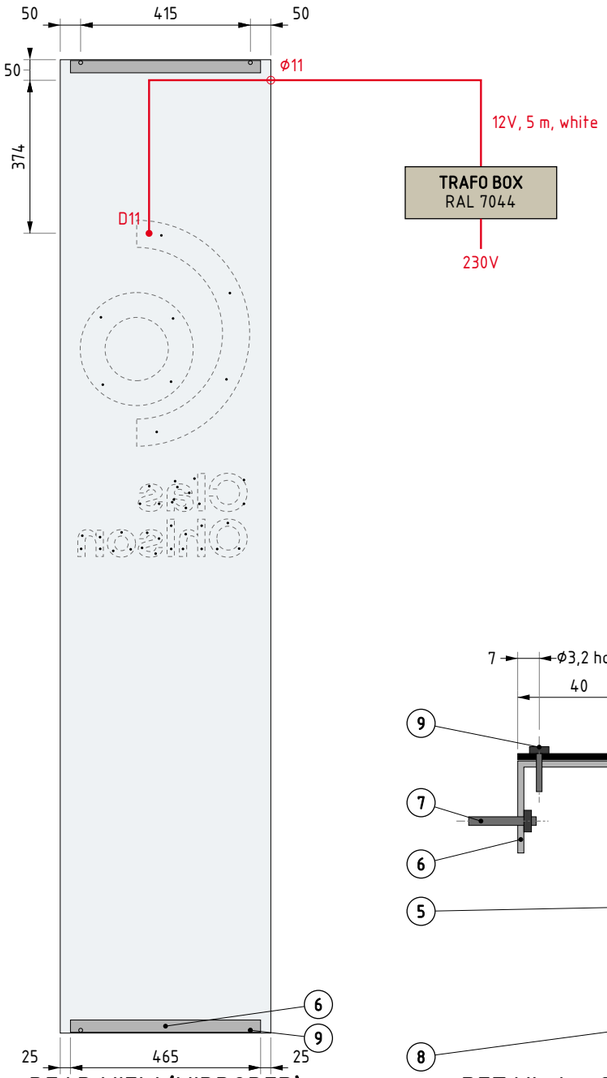


REAR VIEW (MIRRORED)

SCALE 1:15

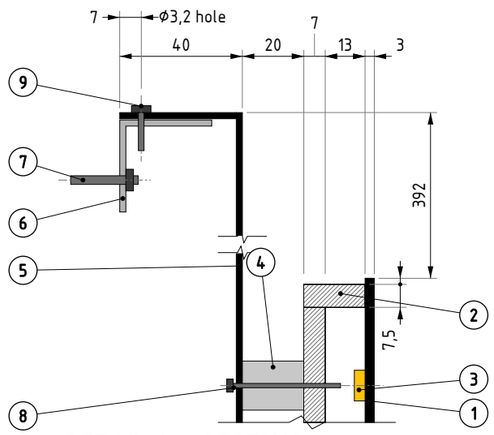

DETAIL A – SECTION

SCALE 1:2 | top edge + letter, broken view

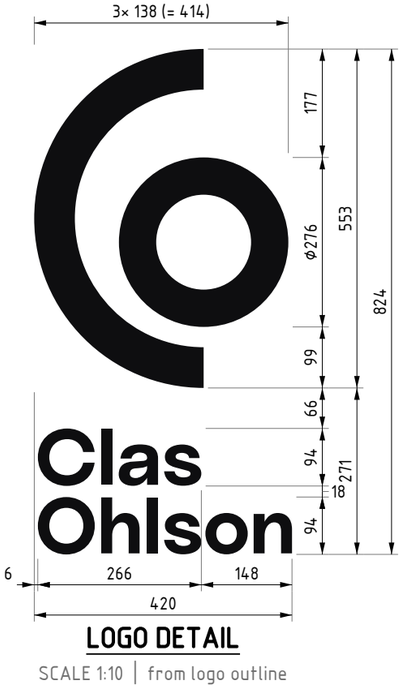

LOGO DETAIL

SCALE 1:10 | from logo outline




3D VIEW

ILLUSTRATIVE – NOT TO SCALE

ø3,2 mm, 7 mm from edge; letter fixings ø4 mm, 41 pcs. (dots); ø11 mm in left side edge, 50 mm from top

P8 SPECIAL – SECTION A–A (1:2)



plexi 20 mm: back 7 mm + cavity 13 mm, walls 7,5 mm
Al 3 mm face larger (overhang ?); LED on face
ø4 mm holes = spacers

BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face P8 special	Alu 3 mm	RAL 9005	6,64 m / 0,12 m²
2	Letter body P8, milled shell	Plexi 20 mm white	–	6,64 m / 0,12 m²
3	LED	LED	–	
4	Spacer ø16 x 20 mm, ø4 mm holes	Aluminium	–	41 pcs.
5	Folded plate 515 x 2380 x 40 mm	Alu 2 mm folded	NCS S 0540-B	1 pcs.
6	L profile 30 x 30 x 2 mm (top + bottom)	Aluminium	–	0,93 m
7	Wall fixing		–	
8	Letter fixing through plate		–	41 pcs.
9	Screw plate –> L, DIN 7504 N 4,2 x 16 mm	Steel, hardened	–	4 pcs.
10	Cable 12V white, D11 –> ø11 mm side	cable	–	5 m
11	Trafo box (PSU)	PSU	RAL 7044	1 pcs.

MAIN DATA

Quantity	2 pcs.
Overall size	515 x 2380 x 40 mm
Environment	Exterior
Plate	Alu 2 mm, sheet 3000 x 1500 mm
Flat	591 x 2456 mm, 1 part
Plate finish	NCS S 0540-B semi matt
Logo	420 x 824 mm
Letters	P8: Al 3 mm + plexi 20 mm
Letter finish	RAL 9005 semi matt
Illumination	LED, backlit
Mounting	L 30 x 30 x 2 mm, top + bottom
Fixing holes	ø3,2 mm, 7 mm from edge, ~300 mm
Cable	12V, 5 m, white, left side top
Letter holes	ø4 mm: 41 pcs., slots: 12 pcs.
Weight (calc.)	≈ 12 kg / pcs., excl. PSU

REVISIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-15	

CLIENT
BrandFactory

TITLE
Order 226045 Clas Ohlson Bodø – LED sign 515 x 2380 mm, P8 special

ORDER NO.
ALT0000_00.00_RS

FILE / DRAWING NO.
Order 226045

SCALE
1:15 / 1:2

FORMAT
A3

REV. A

PROJECTION

DATE
2026-10-15

2 pcs.

Sheet 1 / 1