

# Thesis Talk

**Salome Bachmann**

May 4, 2026



# Overview of Topics

- Context
- Terminology
- Overview of Models
- Results of Cohesive Zone Model
- Discussion
- Outlook

# What am I doing and why is this relevant?

- Hang out in my office and have coffee (please come by)
- Trying to make an accurate model for crack propagation in snow
- Cracks in snow on large scales can lead to avalanche release
- Average of 24 deaths by avalanche in Switzerland per year, multiple hundred non-fatal accidents (SLF, 2025)
- Understanding relevant because avalanches endanger human life and infrastructure (Schweizer et al., 2003)
- **Ultimate Goal:** determining whether slab breakoff can be seen in DAS data and how this would look

# Words I will probably say a lot explained I

- Slab: Part of the snowpack which breaks off and slides downhill as a cohesive unit (the avalanche itself, I'm looking at dry-snow slab avalanches) (Schweizer et al., 2003)
- Weak layer: Layer with different mechanical properties than the rest of the snow, cracks usually propagate in this layer because it's weaker than the rest of the snowpack (Schweizer et al., 2003)
- Mode I, Mode II and Mode III cracks: cracks opening as a response to stress in different directions:

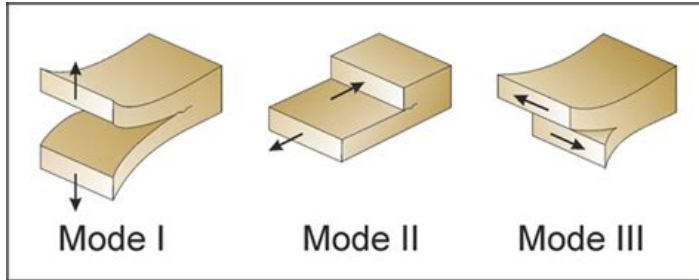


Figure: Fracture modes according to Philipp et al., 2013

## Words I will probably say a lot explained II

- Anticrack: weak layer collapses under loading, slab starts bending, collapse and cracks caused by bending propagate (Gaume et al., 2018)
- Sub-Rayleigh: Cracks that propagate at speeds lower than the shear wave speed in snow (Trottet et al., 2022)
- Supershear: Cracks propagate faster than shear wave speed in snow (Trottet et al., 2022)

# Overview of Models

- Model domain 400m wide, 3m high
- 1m snow layer, 2m air layer
- Multiple source versions: single source, source line with sources firing with a time delay (moving source) and rupture front
- Sources buried in snow (like crack)
- For moving source: sub-rayleigh and supershear speeds

# Bibliography I



Gaume, J., Gast, T., Teran, J., van Herwijnen, A., & Jiang, C. (2018). Dynamic anticrack propagation in snow. *Nature Communications*, 9(1), 3047.  
<https://doi.org/10.1038/s41467-018-05181-w>



Philipp, S., Afşar, F., & Gudmundsson, A. (2013). Effects of mechanical layering on hydrofracture emplacement and fluid transport in reservoirs. *Frontiers in Earth Science*, 1. <https://doi.org/10.3389/feart.2013.00004>



Schweizer, J., Bruce Jamieson, J., & Schneebeli, M. (2003). Snow avalanche formation. *Reviews of Geophysics*, 41(4). <https://doi.org/10.1029/2002RG000123>



SLF. (2025). Avalanche Victims since 1936 - Long Term Statistics.



Trottet, B., Simenhois, R., Bobillier, G., Bergfeld, B., van Herwijnen, A., Jiang, C., & Gaume, J. (2022). Transition from sub-Rayleigh anticrack to supershear crack propagation in snow avalanches. *Nature Physics*, 18(9), 1094–1098.  
<https://doi.org/10.1038/s41567-022-01662-4>



Salome Bachmann  
Master Student  
sbachmann@student.ethz.ch

ETH Zurich  
D-EAPS