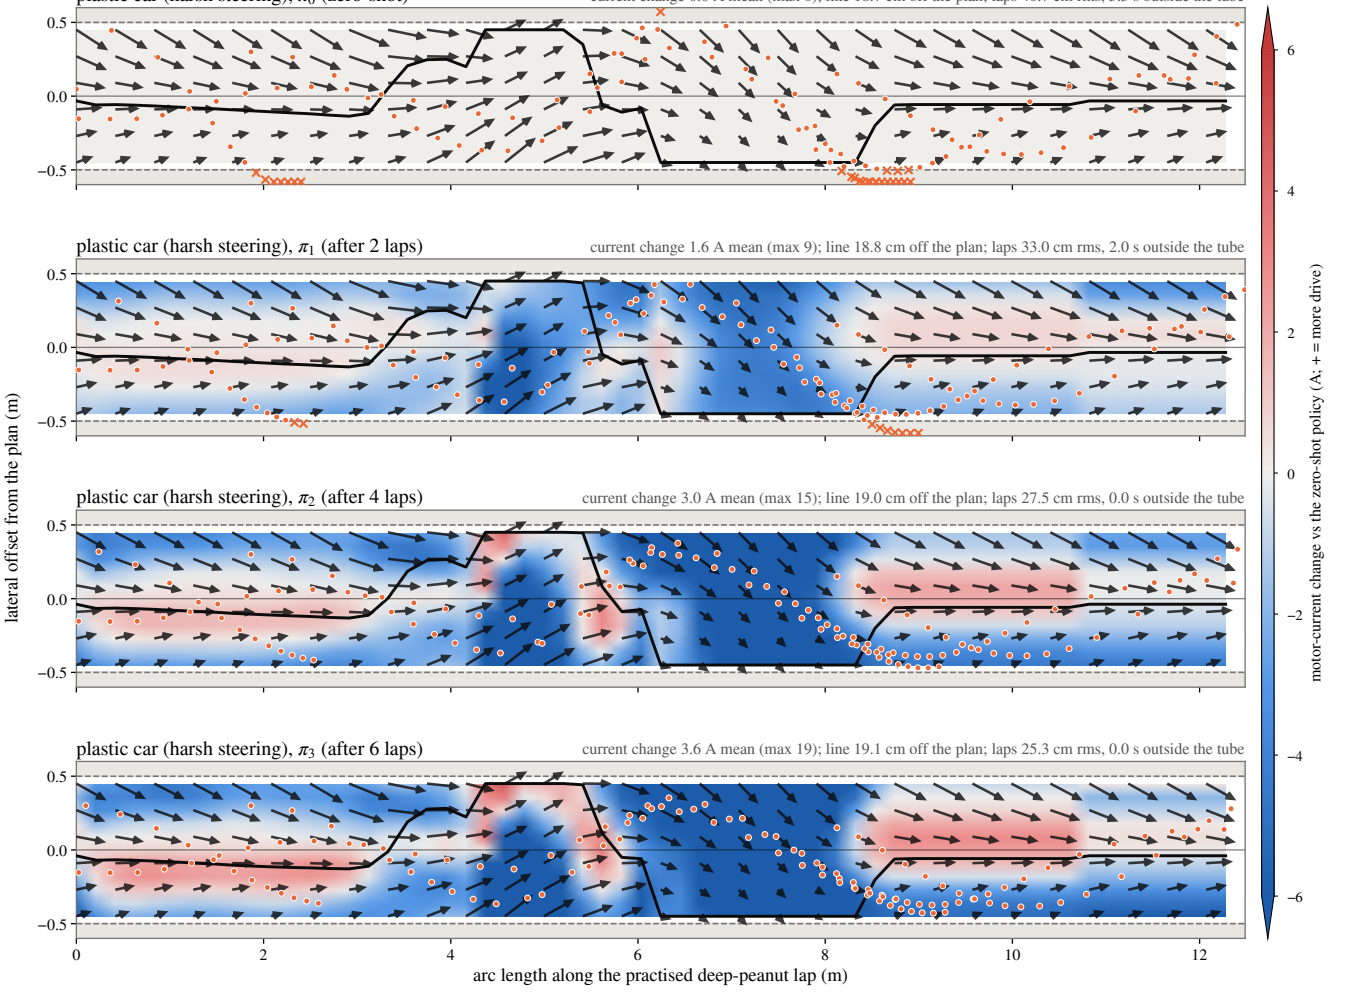

plastic car (harsh steering), $\pi_0$ (zero-shot)
current change 0.0 A mean (max 0); line 18.7 cm off the plan; laps 40.7 cm rms, 5.5 s outside the tube
plastic car (harsh steering), $\pi_1$ (after 2 laps)
current change 1.6 A mean (max 9); line 18.8 cm off the plan; laps 33.0 cm rms, 2.0 s outside the tube
plastic car (harsh steering), $\pi_2$ (after 4 laps)
current change 3.0 A mean (max 15); line 19.0 cm off the plan; laps 27.5 cm rms, 0.0 s outside the tube
plastic car (harsh steering), $\pi_3$ (after 6 laps)
current change 3.6 A mean (max 19); line 19.1 cm off the plan; laps 25.3 cm rms, 0.0 s outside the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
12
arc length along the practised deep-peanut lap (m)
motor-current change vs the zero-shot policy (A; + = more drive)
6
4
2
0
−2
−4
−6
0.50 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
outside the tube (at the frame edge)
where the push is zero
where the car is 1.0 s later