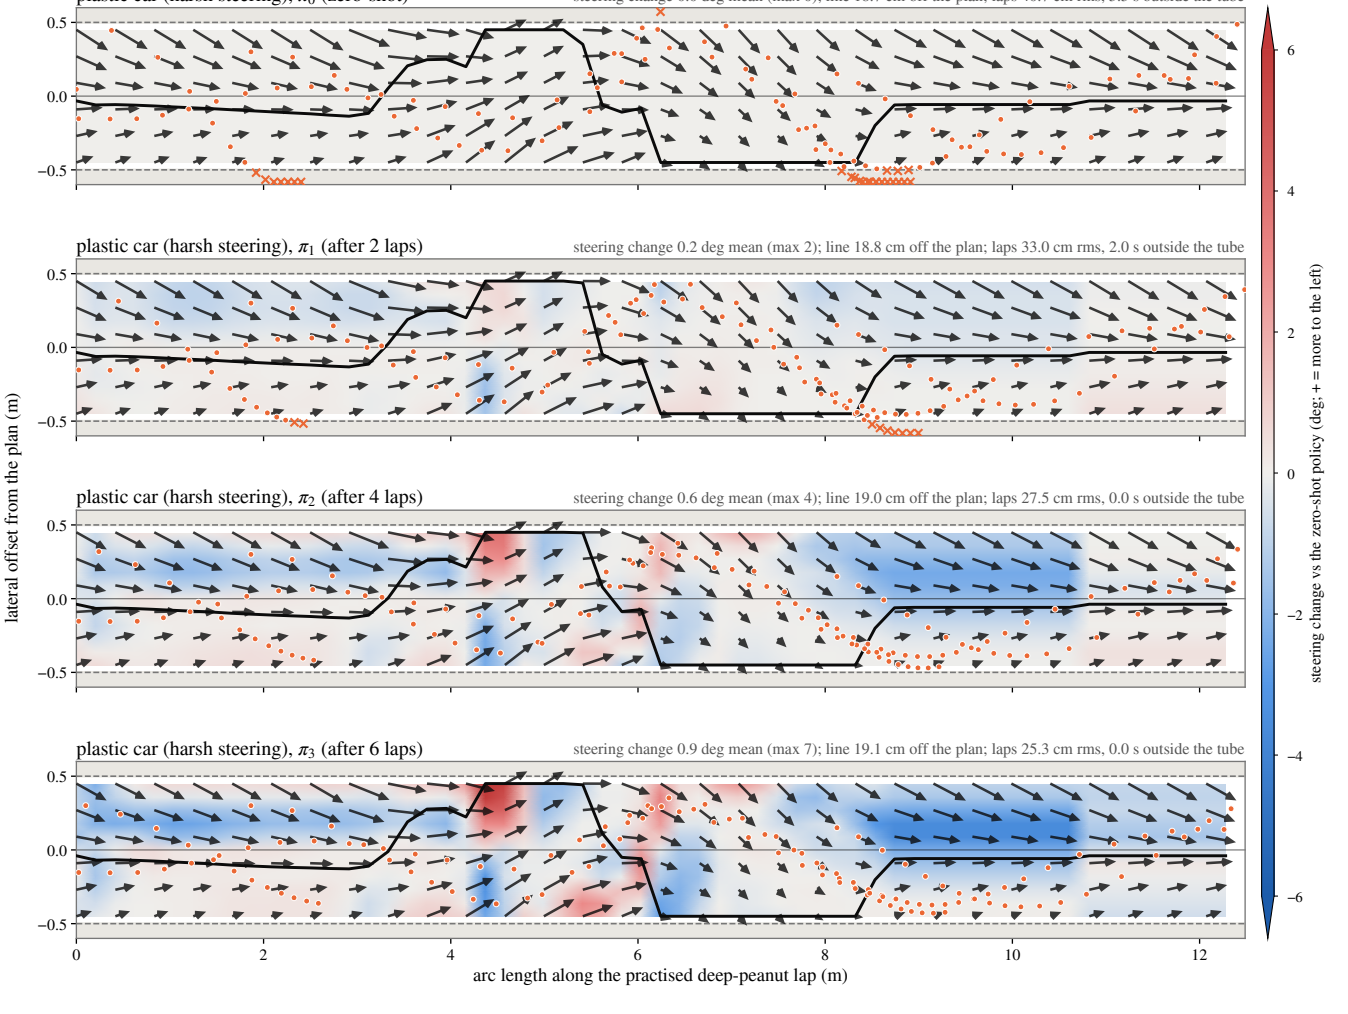

plastic car (harsh steering), π_0 (zero-shot)
steering change 0.0 deg mean (max 0); line 18.7 cm off the plan; laps 40.7 cm rms, 5.5 s outside the tube
plastic car (harsh steering), π_1 (after 2 laps)
steering change 0.2 deg mean (max 2); line 18.8 cm off the plan; laps 33.0 cm rms, 2.0 s outside the tube
plastic car (harsh steering), π_2 (after 4 laps)
steering change 0.6 deg mean (max 4); line 19.0 cm off the plan; laps 27.5 cm rms, 0.0 s outside the tube
plastic car (harsh steering), π_3 (after 6 laps)
steering change 0.9 deg mean (max 7); line 19.1 cm off the plan; laps 25.3 cm rms, 0.0 s outside the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
12
arc length along the practised deep-peanut lap (m)
steering change vs the zero-shot policy (deg; + = more to the left)
6
4
2
0
−2
−4
−6
0.50 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
outside the tube (at the frame edge)
where the push is zero
where the car is 1.0 s later