

HSE TOOLBOX TALK

HAND SAFETY AND PINCH POINTS


PURPOSE AND SCOPE

Protect hands and fingers from pinch, cut and crush hazards between loads, equipment and surfaces through hands-free tools, restraint, correct grip and line-of-fire discipline.

KEY HAZARDS



CRITICAL VALUES TO VERIFY IN THE FIELD

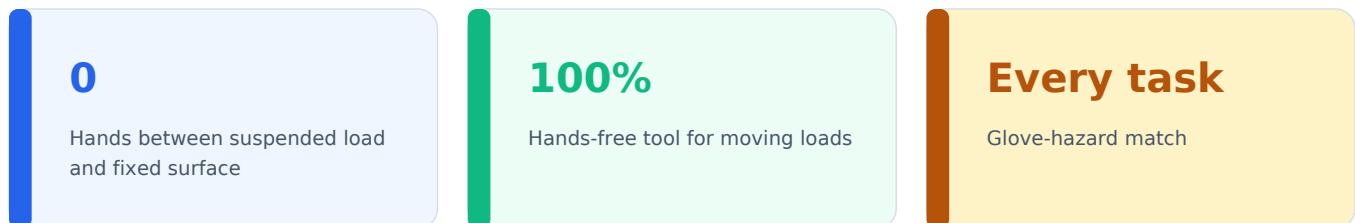

REMEMBER - SERNEM

S

Stop and think

E

Evaluate the risk

R

Remove or reduce

N

Never assume

E

Ensure protection

M

Monitor and communicate

HSE TOOLBOX TALK

HAND SAFETY AND PINCH POINTS

STANDARDS AND FIELD REQUIREMENTS

OSHA 1910.212, 1910.147 and 1910.138 integrate machine guarding, control of unexpected energy and task-suitable hand protection.

OSHA 1910.212(a)

MACHINE GUARDING

Make pinch points, rotating parts and points of operation inaccessible using fixed or interlocked guards.

OSHA 1910.147

UNEXPECTED MOVEMENT

Before cleaning, adjustment or clearing jams, isolate every energy source and verify zero energy.

OSHA 1910.138

HAND PROTECTION

Select gloves for cut, abrasion, chemical, heat and puncture hazards; separately assess entanglement around rotating equipment.

SAHA LINE-OF-FIRE KURALI

HANDS-FREE GUIDING

Guide suspended or moving loads using push-pull tools and tag lines; never place hands on mating surfaces.

MINIMUM EVIDENCE BEFORE START

- | | |
|---|---|
| ☐ Task risk assessment | ☐ Pinch-point marking / briefing |
| ☐ Lifting / restraint plan | ☐ Hands-free tool inspection |
| ☐ Machine-guard inspection | ☐ Glove-selection assessment |

SUPERVISOR DISCUSSION POINTS

- Where will my hand be if this load moves?
- Which tool can eliminate hand contact?
- Which hazard was this glove selected for?

HANDS-FREE GUIDING AND LINE-OF-FIRE CONTROL



Tag line - Push-pull tool - Restraint - Distance - Signaller - Suitable gloves

HSE TOOLBOX TALK

HAND SAFETY AND PINCH POINTS

CRITICAL CONTROL MEASURES (HIERARCHY OF CONTROLS)

1. ELIMINATE HAND CONTACT

Remove hands from the hazard zone using automated feed, lifting aids or suitable jigs.

2. GUARD AND RESTRAIN

Guard moving parts and restrain workpieces with a vice, clamp or chock.

3. USE HANDS-FREE TOOLS

Use tag lines and push-pull tools for suspended loads, and extension tools in tight areas.

4. CORRECT GLOVE AND POSITION

Keep hands visible with an escape direction; wear task-suitable gloves but never treat gloves as guarding.

CRITICAL WARNING



Never hand-hold a suspended load or aligning flange. You may not have time to withdraw if it moves; stop and establish a hands-free method.

SITE CHECKLIST (BEFORE STARTING WORK)

- | | |
|--|---|
| ☐ Pinch points identified | ☐ Unexpected movement controlled |
| ☐ Load / workpiece restrained | ☐ Guards in place |
| ☐ Hands-free tool ready | ☐ Tag line suitable |
| ☐ Hands outside line of fire | ☐ Gloves task-suitable |
| ☐ Communication / signals clear | |

HSE TOOLBOX TALK

HAND SAFETY AND PINCH POINTS

ATTENDANCE AND APPROVAL

Project / Site:

Date:

Presented by:

Work area:

No	Full Name	Company / Role	Signature
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			