

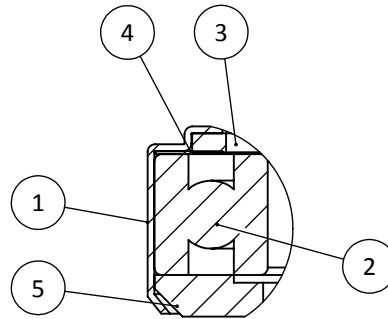



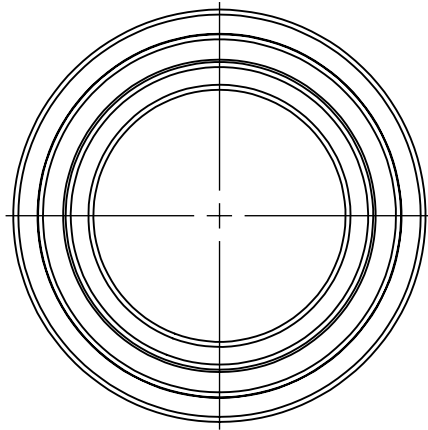


DETAIL B
SCALE 1 : 1

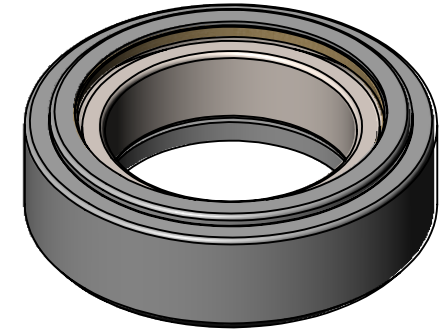

NOTE:
1. () DENOTES NOT MEASURABLE DIMENSIONS.

BOM TABLE					
ITEM NO.	PART NAME	PART NUMBER	MATERIAL	HARDNESS	QTY.
1	CUP_14 BT (306445-C)	H_126_01	CRCA (IS:513)	-	1
2	6010 BALL BEARING	H_126_02	SAE 52100	62±3 HRC	1
3	FELT SEAL_14 BT (306445-C)	H_126_03	WOOLEN FELT	-	1
4	WASHER_14 BT (306445-C)	H_126_04	CRCA (IS:513)	-	1
5	PLATE_14 BT (306445-C)	H_126_05	SAE 52100	62±3 HRC	1

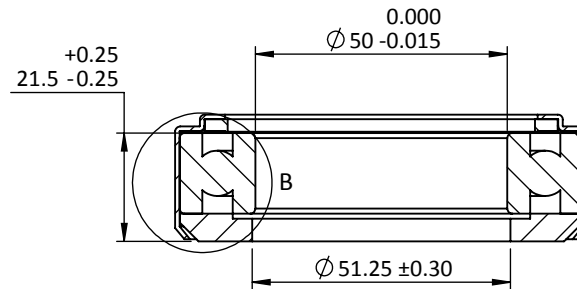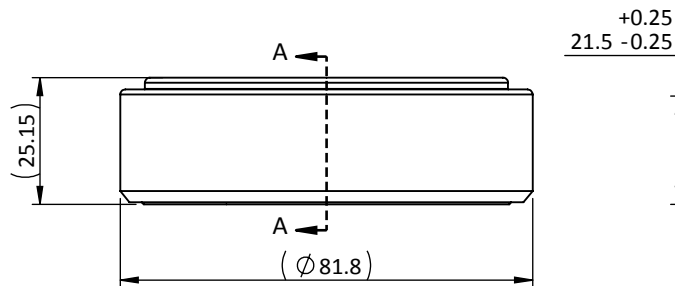

SECTION A-A

TECHNICAL SPECIFICATION
RADIAL LOAD RATING (AS PER ISO 281 & ISO 76) DYNAMIC LOAD 22900 N AND STATIC LOAD 16000 N
BEARING TO BE FILLED WITH TISONA 2 GREASE. QTY. OF GRASE : 6 ± 2 GMS.
BEARING RADIAL CLEARANCE : 0.015 TO 0.045MM

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

THIS DRAWINGS AND DIMENSION GIVEN HERE
ARE THE PROPERTY OF HKI BEARINGS AND THIS
MUST NOT BE DISCLOSED FOR ANY PURPOSE
WITHOUT PERMISSION OF HKI BEARINGS

OPEN TOLERANCE
0 10 ±0.1
10 30 ±0.2
30 100 ±0.3
100 300 ±0.5



DO NOT SCALE DRAWING

REVISION: 00

HARIKRISHNA INDUSTRIES

					NAME	SIGNATURE	DATE
					DRAWN	JP	08/06/20
					CHK'D	RP	08/06/20
					APPV'D	RP	08/06/20
					MATERIAL:	SCALE:1:1.5	
					SEE BOM		
00	INITIAL RELEASE	JP	08/06/20				
REV	CHANGE	NAME	DATE	WEIGHT:	430 grms.		

TITLE:	CUSTOMER PART NO.
H-14 BT (306445-C)	
DWG NO.	CUSTOMER:
H_126	
A4	SHEET 1 OF 1