


D2 · D3

DRESSING AND BATHROOM · 2 FT 6" · AS AST-DR-009

D1


MAIN DOOR · 3 FT · AS AST-DR-001

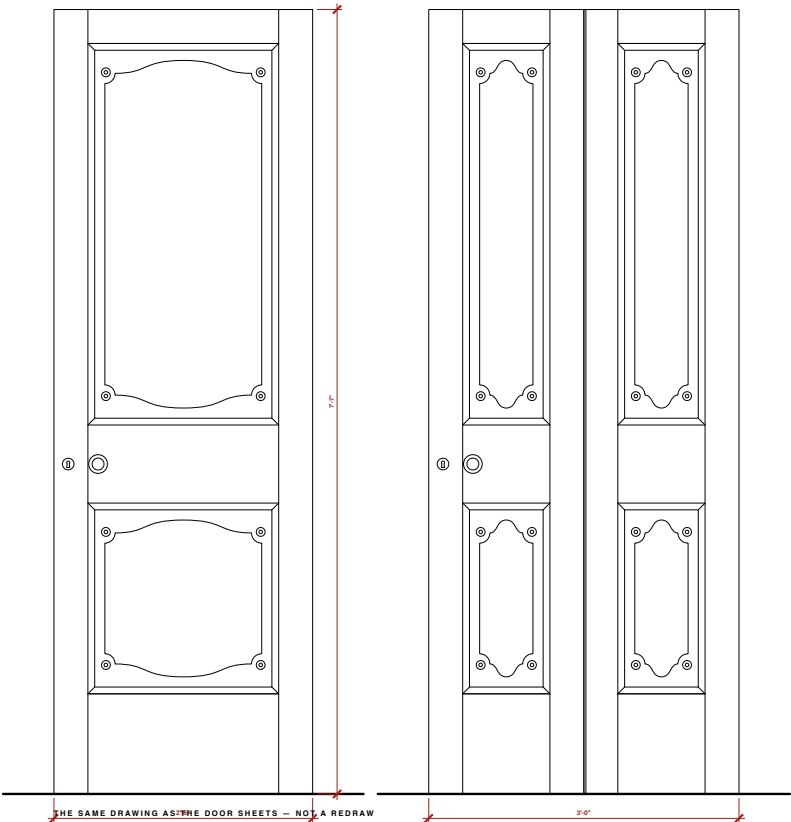

Both elevations are generated from the door sheets' own code, so the design cannot drift. Nothing on this sheet changes how the door LOCKS — only how it is made.

1 · THROUGH THE LEAF

SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

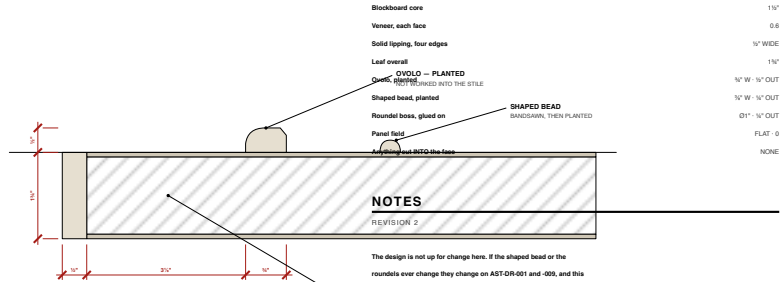

2 · WHAT CHANGES

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

Panel field

was: sunk 1/2" into the solid  
now: stays FLAT — the oval round it does the work  
Ovals sticking  
was: worked on the stile edge  
now: run as a separate 1/2" x 1/2" moulding, mired on  
Shaped bead  
was: carved into the panel face  
now: banded to the curve in 1/2" x 1/2", planted on  
Corner roundels  
was: carved bosses  
now: turned discs Ø1" x 1/2", glued on  
The leaf  
was: solid teak, 1 1/2"  
now: 1 1/2" blockboard, 1/4" fluting, veneer both sides

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core 1 1/2"  
Veneer, each face 0.8  
Solid fluting, four edges 1/2" WIDE  
Leaf overall 1 1/2"  
Leaf overall ØVOLD — PLANTED  
Ovals, 1/2" Ø, 1/2" H, 1/2" W, 1/2" OUT  
Shaped bead, planted 1/2" W · 1/2" OUT  
Roundel boss, glued on Ø1" · 1/2" OUT  
Panel field FLAT · 0  
Shaped bead, planted BANDSAWN, THEN PLANTED  
None NONE

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -006, and this sheet follows — it draws from the same code.

BLOCKBOARD CORE  
Lapping is solid teak on all four edges so the leaf can be trimmed on site and the hinges and lock screw into wood, not into board.

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovals, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper aris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and clamp if the shop can.

A STUDY IN TEAK

Particulars of the room

DOORS — MADE IN VENEER

Same design · Planted mouldings · Construction only

|                                                                |                    |
|----------------------------------------------------------------|--------------------|
| SCALE<br>AS NOTED @ A3                                         | DATE<br>23.09.2026 |
| REV<br>2 — the design unchanged; only the construction differs | DWG<br>AST-DR-015  |

PROJECT  
A Study in Teak — Doors — Made in Veneer

SHEET  
General arrangement — the whole sheet  
each view follows at its own scale, pages 2 to 5

SCALE  
NTS



DATE  
23.09.2026

REV  
2

DRAWING  
AST-DR-015 · 1 of 5

1 · THROUGH THE LEAF

SCALE 1:2 (6" = 1'-0") @ A4 · SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

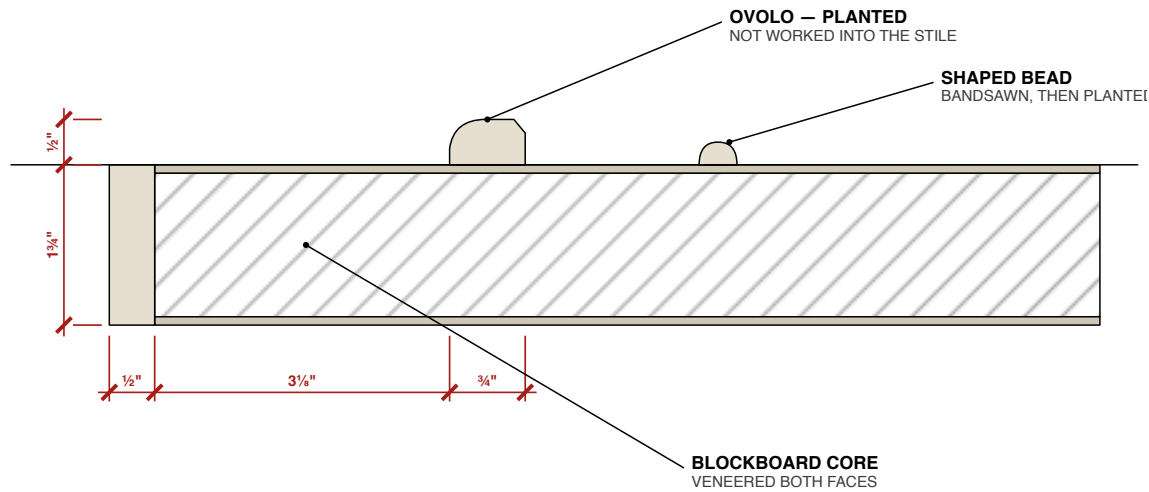

|                                                     |                                                                                      |                   |                    |          |                                |
|-----------------------------------------------------|--------------------------------------------------------------------------------------|-------------------|--------------------|----------|--------------------------------|
| PROJECT<br>A Study in Teak — Doors — Made in Veneer | SHEET<br>1 · through the leaf<br>Same design · Planted mouldings · Construction only | SCALE<br>1:2 @ A4 | DATE<br>23.09.2026 | REV<br>2 | DRAWING<br>AST-DR-015 · 2 of 5 |
|-----------------------------------------------------|--------------------------------------------------------------------------------------|-------------------|--------------------|----------|--------------------------------|

RELIEF

FACE OF THE VENEER = DATUM 0

|                            |                   |
|----------------------------|-------------------|
| Blockboard core            | 1 1/2"            |
| Veneer, each face          | 0.6               |
| Solid lipping, four edges  | 1/2" WIDE         |
| Leaf overall               | 1 3/4"            |
| Ovolo, planted             | 3/4" W · 1/2" OUT |
| Shaped bead, planted       | 3/8" W · 1/4" OUT |
| Roundel boss, glued on     | Ø1" · 1/4" OUT    |
| Panel field                | FLAT · 0          |
| Anything cut INTO the face | NONE              |

|                                                     |                                                                        |              |                    |          |                                |
|-----------------------------------------------------|------------------------------------------------------------------------|--------------|--------------------|----------|--------------------------------|
| PROJECT<br>A Study in Teak — Doors — Made in Veneer | SHEET<br>Relief<br>Same design · Planted mouldings · Construction only | SCALE<br>NTS | DATE<br>23.09.2026 | REV<br>2 | DRAWING<br>AST-DR-015 · 3 of 5 |
|-----------------------------------------------------|------------------------------------------------------------------------|--------------|--------------------|----------|--------------------------------|

# NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

Lipping is solid teak on all four edges so the leaf can be trimmed

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovolo, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper arris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and cramp if the shop can.

|                                                     |                                                                       |              |                    |          |                                |
|-----------------------------------------------------|-----------------------------------------------------------------------|--------------|--------------------|----------|--------------------------------|
| PROJECT<br>A Study in Teak — Doors — Made in Veneer | SHEET<br>Notes<br>Same design · Planted mouldings · Construction only | SCALE<br>NTS | DATE<br>23.09.2026 | REV<br>2 | DRAWING<br>AST-DR-015 · 4 of 5 |
|-----------------------------------------------------|-----------------------------------------------------------------------|--------------|--------------------|----------|--------------------------------|

## 2 · WHAT CHANGES

on site and the hinges and lock screw into wood, not into boar

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

### Panel field

was: sunk ½" into the solid

now: stays FLAT — the ovolo round it does the work  
Ovolo sticking

was: worked on the stile edge

now: run as a separate ¾" x ½" moulding, mitred on  
Shaped bead

was: carved into the panel face

now: bandsawn to the curve in ⅜" x ¼", planted on  
Corner roundels

was: carved bosses

now: turned discs Ø1" x ¼", glued on  
The leaf

was: solid teak, 1¾"

now: 1½" blockboard, ½" lipping, veneer both sides

PROJECT  
A Study in Teak — Doors — Made in Veneer

SHEET  
2 · what changes  
Same design · Planted mouldings · Construction only

SCALE  
NTS

DATE  
23.09.2026

REV  
2

DRAWING  
AST-DR-015 · 5 of 5