

D2 · D3

DRESSING AND BATHROOM · 2 FT 6 · AS AST-DR-009

D1

MAIN DOOR · 3 FT · AS AST-DR-001

1 · THROUGH THE LEAF

SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core
Veneer, each face
Solid lipping, four edges
Leaf overall
OVOLLO — PLANTED
Ovolo, planted
Shaped bead, planted
Roundel boss, glued on
Panel field
Anything cut INTO the face

1½"
0.6
0½" WIDE
1¾"
0¼" W · 0¼" OUT
0¼" W · 0¼" OUT
Ø1" · 0¼" OUT
FLAT - 0
NONE

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

BLOCKBOARD CORE
Lipping is solid teak on all four edges so the leaf can be trimmed on site and the hinges and lock screw into wood, not into board.

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovolo, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper arris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and cramp if the shop can.

2 · WHAT CHANGES

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

Panel field
was: sunk 0½" into the solid
now: stays FLAT — the ovolo round it does the work
Ovolo sticking
was: worked on the stile edge
now: run as a separate 0¼" x 0½" moulding, mitred on Shaped bead
was: carved into the panel face
now: bandsawn to the curve in 0¼" x 0¼", planted on Corner roundels
was: carved bosses
now: turned discs Ø1" x 0¼", glued on
The leaf
was: solid teak, 1½"
now: 1½" blockboard, 0½" lipping, veneer both sides

A STUDY IN TEAK

Particulars of the room

DOORS — MADE IN VENEER

Same design · Planted mouldings · Construction only

SCALE
AS NOTED @ A3

DATE
23.09.2026


REV
2 — the design unchanged; only the construction differs

DWG
AST-DR-015

Both elevations are generated from the door sheets' own code, so the design cannot drift. Nothing on this sheet changes how the door LOOKS — only how it is made.

D2 · D3


DRESSING AND BATHROOM · 2 FT 6 · AS AST-DR-009

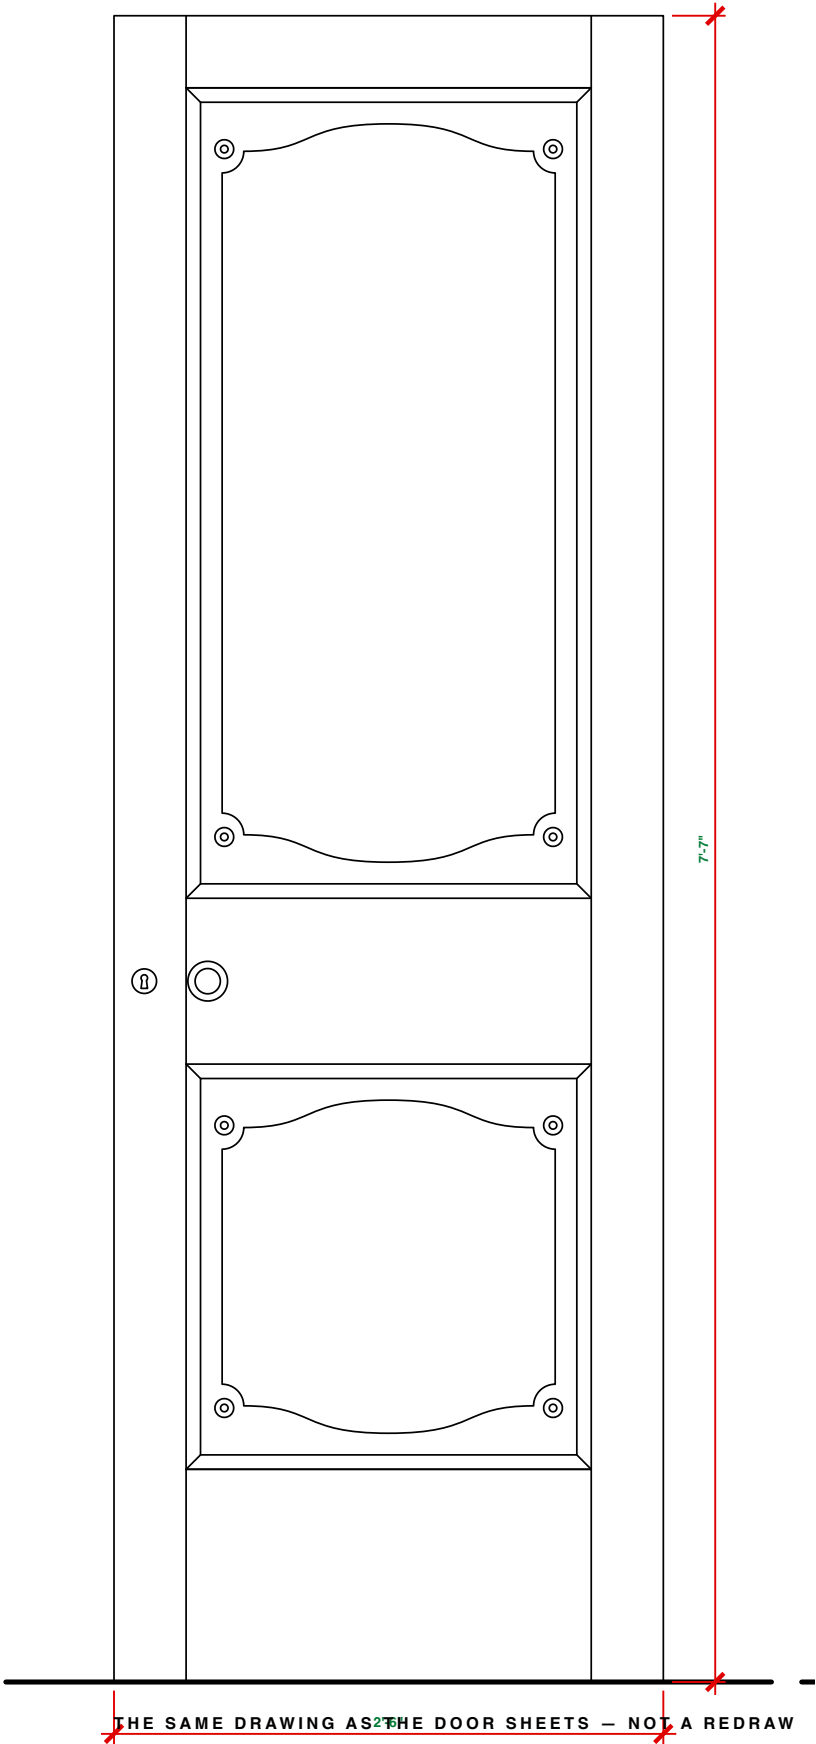

Both elevations are generated from the door sheets' own code, so the design cannot drift. Nothing on this sheet changes how the door LOOKS — only how it is made.

D1

MAIN DOOR · 3 FT · AS AST-DR-001

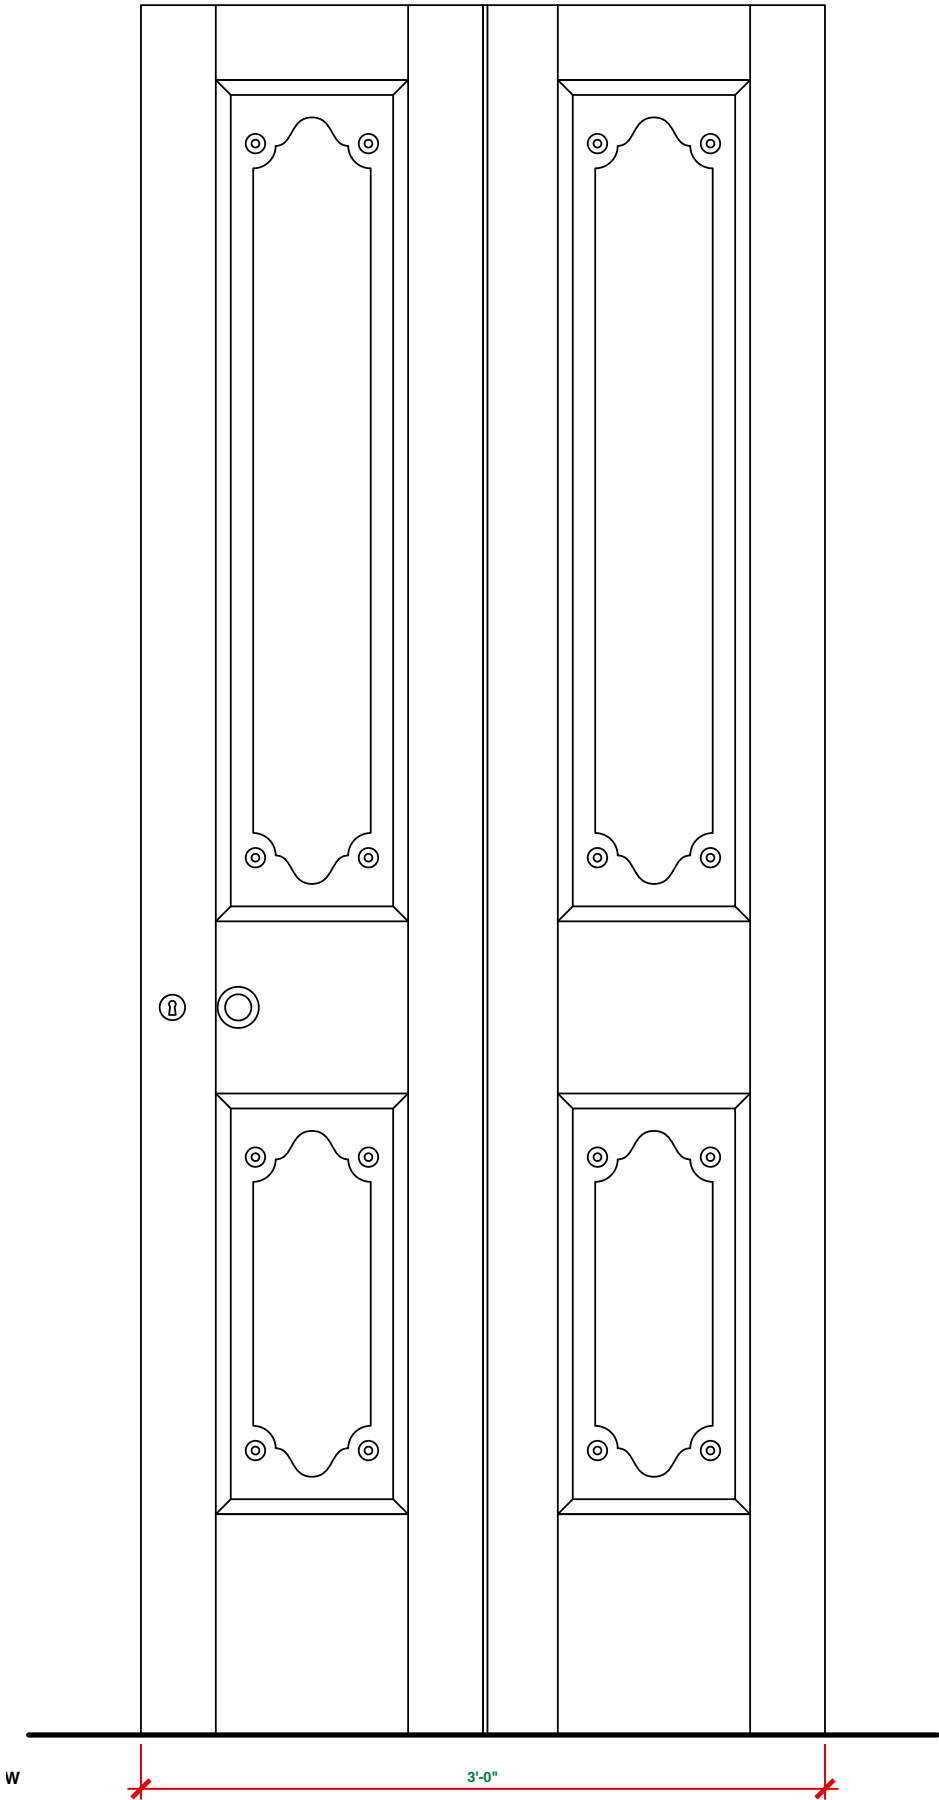

1 · THROUGH THE LEAF

SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core

Veneer, each face

Solid lipping, four edges

Leaf overall

OVOLO — PLANTED
Ovolo, planted
NOT WORKED INTO THE STILE

Shaped bead, planted

Roundel boss, glued on

Panel field

Anything cut INTO the face


SHAPED BEAD
BANDSAWN, THEN PLANTED

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.


BLOCKBOARD CORE
VENEERED BOTH FACES
The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

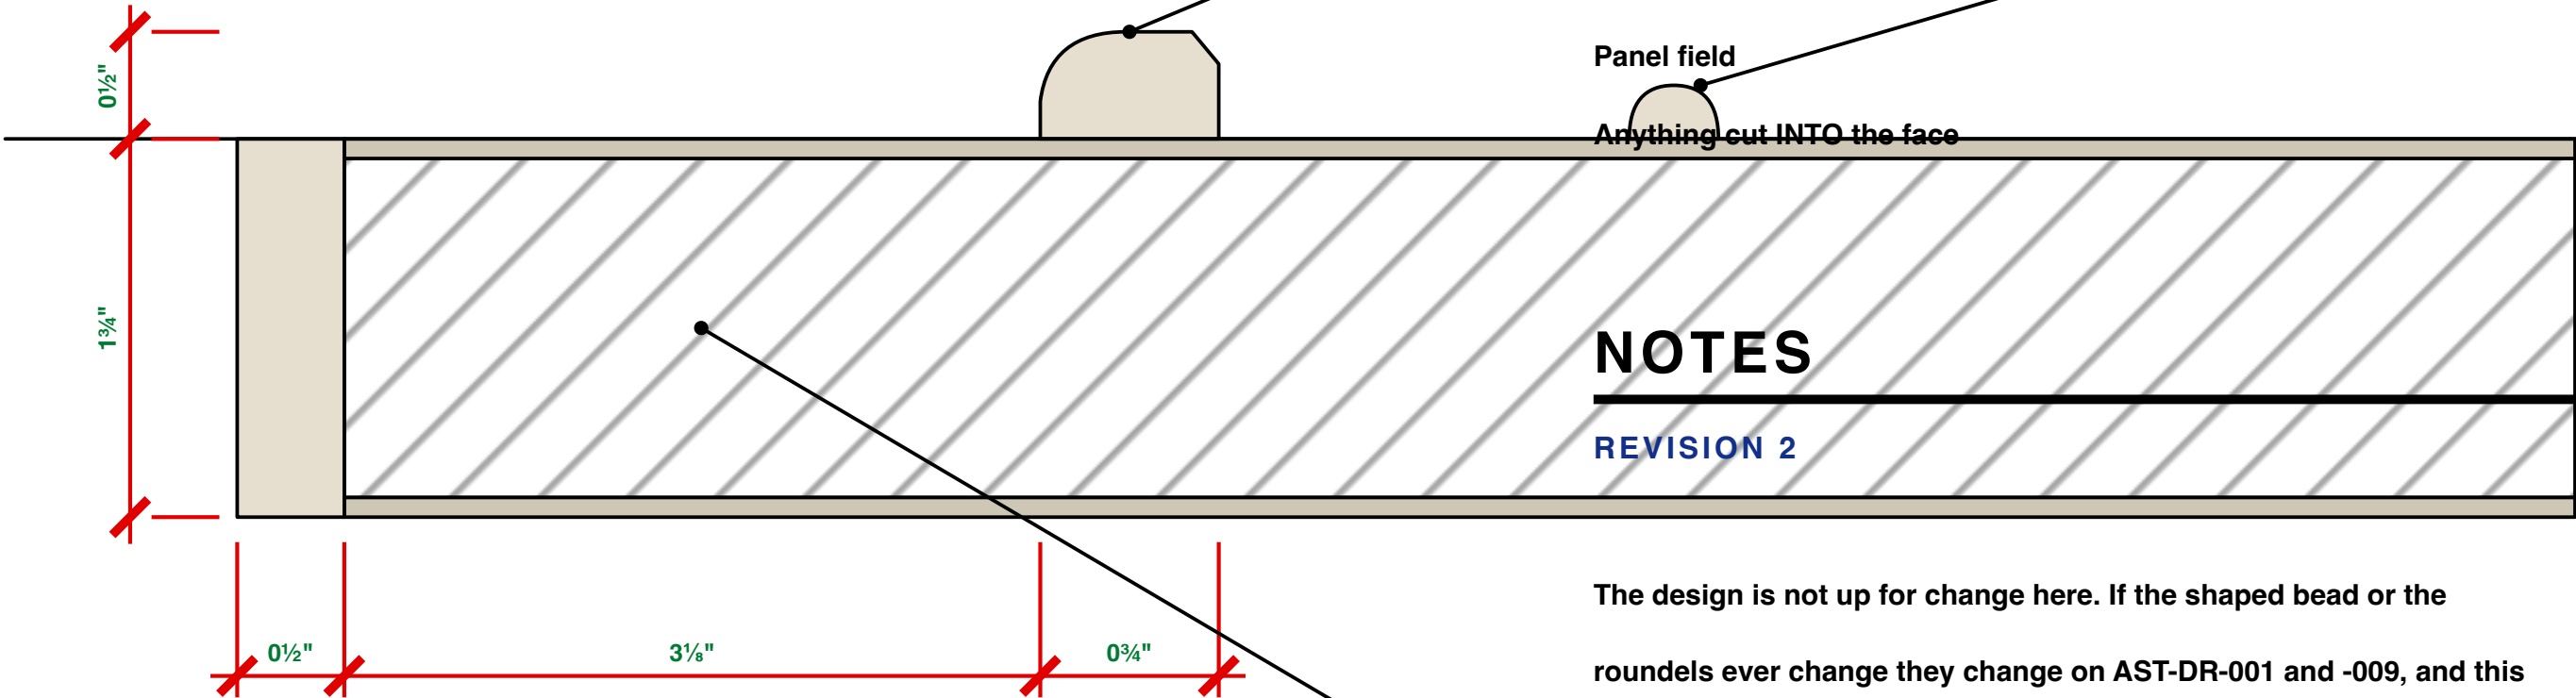

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core	1½"
Veneer, each face	0.6
Solid lipping, four edges	0½" WIDE
Leaf overall	1¾"
OVOLO — PLANTED Ovolo, planted NOT WORKED INTO THE STILE	0¾" W · 0½" OUT
Shaped bead, planted SHAPED BEAD BANDSAWN, THEN PLANTED	0⅜" W · 0¼" OUT
Roundel boss, glued on	Ø1" · 0¼" OUT
Panel field	FLAT · 0
Anything cut INTO the face	NONE

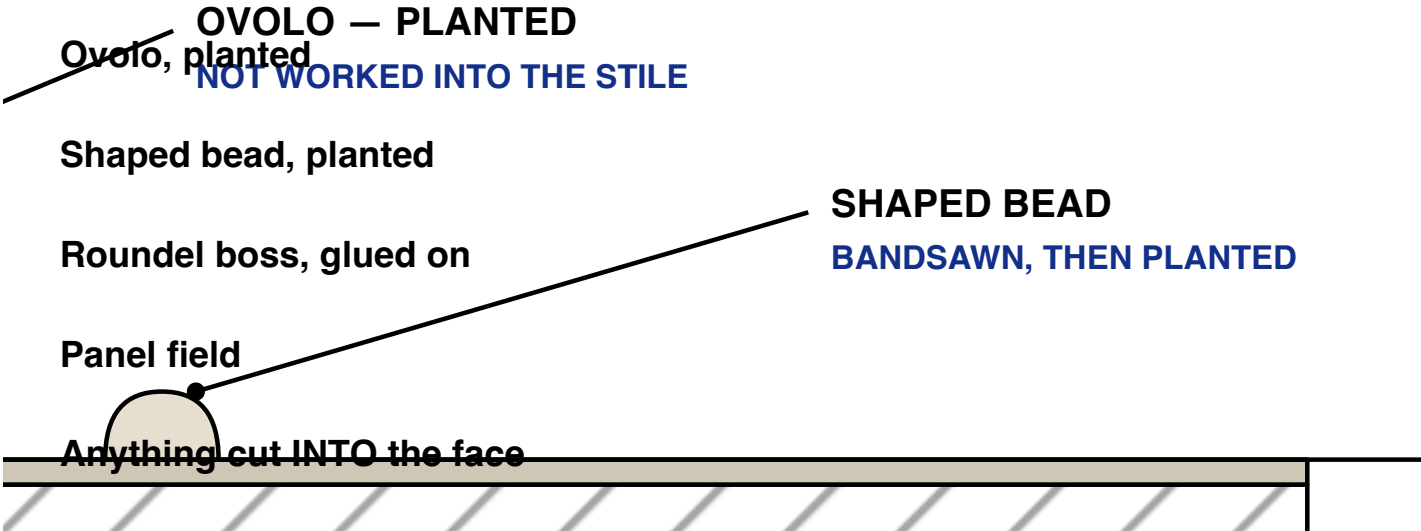

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

- BLOCKBOARD CORE

VENEERED BOTH FACES

Lipping is solid teak on all four edges so the leaf can be trimmed on site and the hinges and lock screw into wood, not into board.
-

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovolo, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper arris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and cramp if the shop can.

2 · WHAT CHANGES

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

Panel field

was: sunk 0½" into the solid

now: stays FLAT — the ovolo round it does the work
Ovolo sticking

was: worked on the stile edge

now: run as a separate 0¾" × 0½" moulding, mitred on
Shaped bead

was: carved into the panel face

now: bandsawn to the curve in 0⅜" × 0¼", planted on
Corner roundels

was: carved bosses

now: turned discs Ø1" × 0¼", glued on
The leaf

was: solid teak, 1¾"

now: 1½" blockboard, 0½" lipping, veneer both sides