

FINIFLUX manual

A finite element model for quantifying groundwater fluxes to streams with radon as a natural tracer. Python edition, with notes on the original MATLAB version.

Sven Frei · Aquatic Ecology and Water Quality Management group, Wageningen University & Research · sven.frei@wur.nl

Benjamin S. Gilfedder · Hydrology, Trier University · gilfedder@uni-trier.de

Draft · October 2026

Supersedes manual v2.0 (Feb 2026)

PyTorch · TensorFlow

CONTENTS

- | | |
|----------------------------|----------------------------------|
| 1 About FINIFLUX | 2 Workflow and web tools |
| 3 Installation | 4 Model concept |
| 5 Preparing the input file | 6 Tributaries and surface inflow |
| 7 Running FINIFLUX | 8 Parameter estimation |
| 9 Uncertainty analysis | 10 Outputs |
| 11 Checking plausibility | 12 If the fit is poor |
| 13 Example datasets | A The MATLAB / BEOPEST version |
| B References | |

1 About FINIFLUX

FINIFLUX is an implicit finite element model that solves the steady-state mass balance of radon-222 (^{222}Rn) along streams and rivers. From measured radon activities it estimates, reach by reach, how much **groundwater** flows into the river and how strongly the river exchanges water with its **hyporheic zone**.

Groundwater is strongly enriched in radon compared with river water. Along a stream, radon is lost by degassing to the atmosphere and by radioactive decay, and it is replenished wherever groundwater or hyporheic water enters. The radon profile measured along the river therefore records where and how much groundwater enters. FINIFLUX closes this mass balance for every reach and inverts the measured profile into a spatially resolved estimate of groundwater inflow.

FINIFLUX is open source and freely available. The theory, numerical implementation and residence-time models are described in Frei & Gilfedder (2015) and Frei et al. (2019).

What is new in the Python edition

The original FINIFLUX (versions 2.x) is a compiled MATLAB program coupled to the optimiser BEOPEST (Doherty, 2010). The Python edition keeps the same physics and the same input file, but rebuilds the model so that it can calibrate itself.

TOPIC	MATLAB VERSION 2.X	PYTHON EDITION
Platform	Windows, compiled MATLAB 2015b plus the MATLAB Runtime (about 700 MB)	Any system with Python 3, NumPy and PyTorch or TensorFlow
Parameter estimation	External optimiser BEOPEST with a master and several slave processes	Built in. The model is differentiable, so gradients come from automatic differentiation (Adam, then L-BFGS)
Running a model	<code>pre_pest.exe</code> , then <code>Beopest64</code> master and slaves in separate command windows	One command: <code>python run_FINIFLUX.py</code>
Stabilising the fit	Tikhonov regularisation with <code>addreg1.exe</code>	Log-space parameters, a misfit normalised by the detection limit, and an optional smoothness penalty
Uncertainty	Sensitivities in <code>finiflux.sen</code>	Posterior credible intervals per reach, an identifiability report, and a groundwater-endmember uncertainty band
Hyporheic depth	Always estimated	Estimated, or calculated from bedform heights
Results and figures	Spread over the run and slave folders; plots with <code>pest_tracker.exe</code>	One <code>results/</code> folder with data files and a five-panel figure, including the water-balance check

TOPIC	MATLAB VERSION 2.X	PYTHON EDITION
Input file	FINIFLUX.xlsx , same layout for both. The Python edition reads it by label, ignores the run path and CPU cells, and adds optional extras (column U, detection limit).	

2 Workflow and web tools

A FINIFLUX study runs from survey planning to checking the results. Free browser tools on this website support several of the steps. They run entirely in the browser and send no data anywhere.

1

Plan the survey

Choose sampling points close enough together that the radon signal of inflowing groundwater is not lost by degassing before the next point.

[Sampling length →](#)

2

Measure in the field

Radon at every sampling point, discharge, mean width and depth of each reach, the radon activity of groundwater (the endmember) and, ideally, its spread. Measure tributaries above their confluence.

3

Estimate degassing

If you use your own gas transfer velocities (degassing model 3), estimate k per reach from empirical models, and calculate k across weirs and waterfalls from radon measured before and after them.

[Degassing models by reach →](#)

[Weir and waterfall degassing →](#)

4

Handle tributaries

Add a short inflow reach at each confluence and calculate the radon activity just below it with the mixing model.

[Confluence mixing →](#)

5

Build the input file

Enter options, sampling points and reaches, check them on the network diagram and profile plot, and download `FINIFLUX.xlsx`.

[Input builder →](#)

6

Run FINIFLUX

`python run_FINIFLUX.py` estimates groundwater inflow, hyporheic depth and residence time for every reach ([section 7](#)).

7

Check the results

Compare modelled and measured radon, the cumulative groundwater inflow against the discharge gain, and the credible intervals ([section 11](#)).

3 Installation

[↓ Download FINIFLUX for Python \(.zip\)](#)

The download contains `run_FINIFLUX.py`, the PyTorch and TensorFlow packages, the README and an example input file (`FINIFLUX.xlsx`, the Schaefer et al. dataset). Unzip it and install the requirements:

It needs Python 3 with NumPy, openpyxl and matplotlib, plus **one** tensor library:

```
# PyTorch backend
pip install torch numpy openpyxl matplotlib

# or TensorFlow backend (use a wheel that matches your processor, e.g. arm64 on
Apple Silicon)
pip install tensorflow numpy openpyxl matplotlib
```

No further installation is needed. Keep the folder structure as it is: `run_FINIFLUX.py` in the main folder, next to `finiflux_pytorch/` and `finiflux_tensorflow/`. The launcher adds the selected package to Python's search path itself.

Using the original MATLAB version?

Its installation, run procedure and download locations are summarised in [appendix A](#).

4 Model concept

Governing equation

For each reach, FINIFLUX solves the steady-state radon mass balance:

$$Q \frac{dC}{dx} = I \cdot c_{gw} + \alpha_1 + \frac{Q_{in}}{L} c_{in} - (I + \alpha_2 + k \cdot w + \lambda \cdot d \cdot w + \frac{Q_{in}}{L}) \cdot C$$

sources – sinks

SYMBOL	MEANING	UNIT
C	Radon activity in the river	Bq/m ³
Q	River discharge	m ³ /s
I	Groundwater inflow per metre of river (estimated)	m ³ /(m·s)
c _{gw}	Radon activity of groundwater (endmember)	Bq/m ³
α ₁ , α ₂	Radon production and loss by hyporheic exchange	Bq/(m·s), m ² /s
k	Gas transfer (degassing) velocity	m/s
w, d	Mean width and depth of the reach	m
λ	²²² Rn decay constant, 0.18 d ⁻¹ = 0.18/86 400 s ⁻¹	s ⁻¹
Q _{in} , L, c _{in}	Tributary discharge, inflow length and radon activity (0 if none)	m ³ /s, m, Bq/m ³

The node–element concept

FINIFLUX discretises the river into one-dimensional finite elements. Each **node** is a sampling location with a measured radon activity. Each **element** is the reach between two neighbouring nodes and carries the reach properties: length, depth, width, discharge, groundwater endmember and so on. A river with *N* sampling points therefore has *N* – 1 reaches. The modelled radon at every node is compared directly with the measurement there.

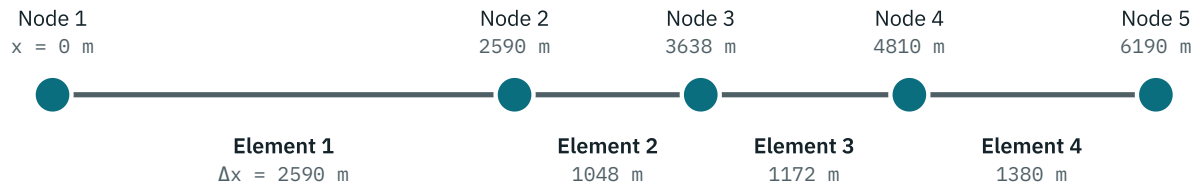


Figure 1. Five sampling points (nodes) along a river and the four reaches (elements) between them, drawn to scale. Node positions go into column F of the input file, element lengths into column J.

Degassing

Option C8 selects how the gas transfer velocity k is obtained. With $v = Q/(w \cdot d)$ in m/d:

- **1, O'Connor & Dobbins (1958):** $k = 9.301 \cdot 10^{-3} \cdot v^{0.5} / d^{1.5} \cdot d$ (m/d).
- **2, Negulescu & Rojanski (1969):** $k = 4.87 \cdot 10^{-4} \cdot (v/d)^{0.85} \cdot d$ (m/d).
- **3, user-defined:** one value per reach in column T, in m/s. Use this for measured values, for other empirical models, and for reaches with weirs or waterfalls, where turbulent degassing is far stronger than the empirical models predict.

The **degassing models tool** compares three empirical models per reach. The **weir and waterfall tool** derives k from radon measured before and after a weir. Both give k in m/d; the **input builder** accepts m/d and converts to m/s for column T.

Hyporheic exchange and residence-time distributions

River water that flows through the streambed (the hyporheic zone) picks up radon produced in the sediment and loses some by decay. FINIFLUX describes this with a production term α_1 and a loss term α_2 . They depend on the hyporheic depth h , porosity, width, the mean residence time t_h and the residence-time distribution (RTD), chosen with option C17:

- **1, exponential:** closed form, $\alpha_1 = \gamma \cdot h \cdot w \cdot \text{por} / (1 + \lambda \cdot t_h)$ and $\alpha_2 = \lambda \cdot h \cdot w \cdot \text{por} / (1 + \lambda \cdot t_h)$ with $\gamma = c_{gw} \cdot \lambda$. The fastest option.
- **2, truncated power law:** from a convolution of the RTD with radon in-growth and decay (Frei et al., 2019).
- **3, gamma:** closed-form Laplace transform $(1 + \lambda \cdot t_h / \alpha)^{-\alpha}$. The shape parameter α (C22) changes the distribution: $\alpha = 1$ equals the exponential model, $\alpha = 2$ gives a distribution with a peak, $\alpha = 0.5$ a long tail.

Including hyporheic exchange (C13 = 1) is recommended; it often improves the fit.

Numerical scheme

FINIFLUX uses linear finite elements. For each element it assembles a reaction matrix, an advection

matrix, a Petrov–Galerkin upwind correction weighted by β (option C24) and a load vector. The upstream boundary condition fixes the radon at the first node to its measured value. The resulting linear system is solved directly. In the Python edition every step is a differentiable tensor operation, so gradients pass through the solve.

5 Preparing the input file

All settings and data live in a single sheet of `FINIFLUX.xlsx`, in three blocks: options in columns B and C, nodes in F and G, and elements in I to U. The data rows start in row 4.

RECOMMENDED

The **FINIFLUX input builder** writes this file for you. It checks every value, locks the inflow columns of normal reaches, keeps tributary reach lengths equal to the inflow length, and shows the network and the radon and discharge profile before you download. It can also open and edit an existing file.

Keep the layout.

The MATLAB version reads every option from its exact cell. Do not insert or reorder rows or columns. The Python edition reads options by their labels and is more forgiving, but a file in the original layout works with both.

Options (columns B and C)

CELL	SETTING	VALUES	USED BY
C4	Run directory for the simulation	A folder path, e.g. D:\FINIFLUX\run1 . Avoid spaces and special characters.	MATLAB
C6	Number of CPU cores. BEOPEST uses one as master and the rest as slaves; three slaves are usually enough.	Whole number ≥ 2	MATLAB
C8	Degassing model	1 O'Connor & Dobbins · 2 Negulescu & Rojanski · 3 user values (column T)	Both
C13	Hyporheic exchange	1 on (recommended) · 0 off	Both
C17	Residence-time distribution	1 exponential · 2 truncated power law · 3 gamma	Both
C22	Shape α of the gamma distribution (only for C17 = 3)	> 0 , e.g. 0.5, 1 or 2	Both
C24	Upstream weighting β of the advection term	0 off · $0 < \beta < 1$ partial · 1 full. Recommended: 0.5	Both
C28	Radon detection limit, labelled "Radon Detection Limit" (optional)	Bq/m ³ , default 2.5. Weights the misfit and sets the default noise level.	Python

Nodes (columns F and G)

COLUMN	CONTENT	UNIT
F	Location of each sampling point along the river, strictly increasing downstream	m
G	Measured radon activity at that point. The first value is also the upstream boundary condition.	Bq/m ³

The list can be as long as needed; it ends at the first empty cell in column F.

Elements (columns I to U)

One row per reach, starting in row 4. Reach i runs from node i to node $i + 1$, so this block has one row fewer than the node block.

COLUMN	CONTENT	UNIT	NOTES
I	Reach number	–	1, 2, 3 ... The last number is the number of nodes minus one.
J	Reach length	m	Distance between the two nodes, usually =F5-F4 .
K	Mean river depth	m	
L	Mean river width	m	
M	Radon activity of inflowing groundwater (endmember)	Bq/m ³	Often the largest source of uncertainty; see column U.
N	Hyporheic depth (initial guess)	m	Only with C13 = 1. In bedform mode (Python) this column holds the bedform height instead.
O	Porosity of the streambed	–	Only with C13 = 1.
P	Tributary / surface inflow discharge	m ³ /s	0 for normal reaches. See section 6 .
Q	Inflow length	m	Must equal the reach length in J. 0 for normal reaches.
R	Radon activity of the inflow	Bq/m ³	0 for normal reaches.
S	Mean river discharge of the reach	m ³ /s	
T	User-defined gas transfer velocity	m/s	Only with C8 = 3; otherwise 0. Divide m/d by 86 400.

COLUMN	CONTENT	UNIT	NOTES
U	Standard deviation of the groundwater endmember (optional)	Bq/m ³	Python Enables the endmember uncertainty analysis (9.2).

6 Tributaries and surface inflow

FINIFLUX can include tributaries and other surface inflows, such as drains or wastewater treatment plant outflows, and accounts for their effect on the radon in the river. Each inflow is represented by a short extra element.

Step 1 · Add two nodes at the confluence

Place one new node where the tributary enters the river and a second one just downstream, where its influence ends. The distance between the two nodes equals the width of the tributary at the inflow (often 1 to 10 m). The element between them is the **inflow element**.

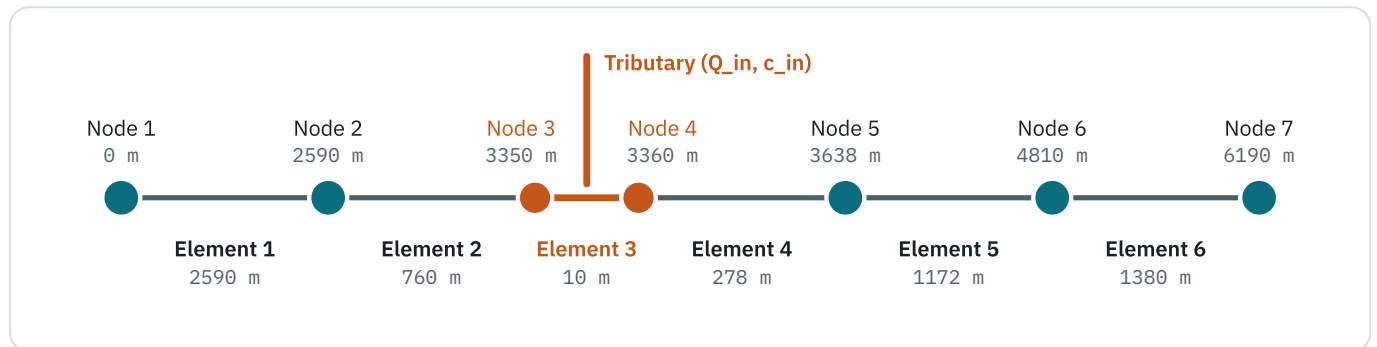


Figure 2. The grid of Figure 1 after adding a tributary between nodes 2 and 3 (not to scale). Two new nodes (orange) at 3350 and 3360 m create element 3, the 10 m inflow element. The grid now has 7 nodes and 6 elements.

Step 2 · Assign radon to the new nodes

Radon is usually measured in the river above the confluence and in the tributary itself. The upstream measurement goes to the first new node (node 3, for example 820 Bq/m³). The radon just below the confluence is calculated with a linear mixing model and goes to the second new node (node 4, for example 830 Bq/m³):

$$C_{\text{after}} = \frac{Q \cdot C_{\text{before}} + Q_{\text{in}} \cdot c_{\text{in}}}{Q + Q_{\text{in}}} \quad \text{Eq. 1}$$

C_{before} and C_{after} are the radon activities above and below the confluence, Q the river discharge, and Q_{in} and c_{in} the discharge and radon of the tributary. [Confluence mixing →](#)

Step 3 · Fill in the inflow element

- Column P: tributary discharge Q_{in} .
- Column Q: inflow length, **identical to the reach length** in column J (10 m in the example).
- Column R: tributary radon c_{in} .
- All other columns as for a normal reach. For every other reach, P, Q and R are 0.

In the **input builder** , set the reach type to "Tributary". It highlights the three inflow fields and sets the next point's location to the previous location plus the inflow length, so the two lengths always match.

7 Running FINIFLUX

`run_FINIFLUX.py` is the only file you run. It finds the input file, loads the selected backend, runs the model, writes the results and draws the figures.

```
python run_FINIFLUX.py                                # estimate parameters with
the defaults                                           the defaults
python run_FINIFLUX.py --backend pytorch              # choose the PyTorch backend
python run_FINIFLUX.py --mode forward                 # one forward run, no fitting
python run_FINIFLUX.py --input selke.xlsx --out selke_run --show
python run_FINIFLUX.py --rn-sigma-rel 0.1             # 10 % measurement
uncertainty on radon
python run_FINIFLUX.py --bedform-depth                # calculate h from bedform
heights (column N)
python run_FINIFLUX.py --adam 500 --lbfgs 150         # more optimisation
iterations
```

The defaults are set in the `CONFIG` dictionary at the top of `run_FINIFLUX.py`; edit them there if you always use the same settings. Every entry has a matching command-line flag. The table lists the values in the launcher at the time of writing.

FLAG	DEFAULT	MEANING
<code>--input</code>	<code>FINIFLUX.xlsx</code>	Input file, relative to the script
<code>--backend</code>	<code>tensorflow</code>	<code>pytorch</code> or <code>tensorflow</code>
<code>--mode</code>	<code>invert</code>	<code>invert</code> estimates parameters, <code>forward</code> runs the model once with the values in the file
<code>--out</code>	<code>results</code>	Output folder
<code>--plot</code>	<code><out>/finiflux_plots.png</code>	Path of the main figure
<code>--show</code>	<code>on</code>	Also open the figure window
<code>--adam</code>	<code>300</code>	Adam warm-up steps (both backends)
<code>--lbfgs</code>	<code>0</code>	L-BFGS iterations after Adam (PyTorch only)
<code>--iter / --lr</code>	<code>300 / 0.05</code>	Adam iterations and learning rate (TensorFlow)

FLAG	DEFAULT	MEANING
--smooth	0.001	Weight of the smoothness penalty between neighbouring reaches
--quiet	off	Hide the progress of each iteration
--bedform-depth	off	Calculate hyporheic depth from bedform heights (8.3)
--uncertainty	on	Estimate posterior uncertainty after the fit; --no-uncertainty skips it
--unc-method	gauss_newton	gauss_newton (robust) or full Hessian
--rn-sigma-abs / --rn-sigma-rel	- / 0.1	Known radon measurement uncertainty, absolute (Bq/m ³) or relative
--endmember	on	Groundwater-endmember uncertainty analysis (needs column U)
--em-p-low / --em-p-high	0.05 / 0.95	Percentiles of the endmember distribution used for the re-fits

Using FINIFLUX as a library

Each package can also be run directly, or imported in your own scripts and notebooks:

```
python -m finiflux_torch.cli invert FINIFLUX.xlsx
python -m finiflux_tf.cli    invert FINIFLUX.xlsx
```

```
from finiflux_torch import read_input, fit, write_results, plot_all,
estimate_uncertainty
data    = read_input("FINIFLUX.xlsx")
result  = fit(data)
write_results(result, "results/")
unc     = estimate_uncertainty(data, result)
```

8 Parameter estimation

In `invert` mode FINIFLUX estimates three parameters for every reach: groundwater inflow I , hyporheic depth h and mean hyporheic residence time t_h . Because the whole model is differentiable, the gradient of the misfit with respect to all parameters is available at once, and the optimiser uses it directly. This replaces the BEOPEST calibration of the MATLAB version.

Objective and regularisation

- **Parameters** are optimised as logarithms. This keeps them positive and puts parameters of very different size on a common scale.
- **Data misfit:** $\sum w_j \cdot (C_j - Rn_{obs,j})^2$ over all nodes, with weights $w_j = 1/\max(Rn_{obs,j}, \text{detection limit})^2$. Small and large activities therefore count comparably, and values near the detection limit are not over-weighted.
- **Smoothness penalty** (`--smooth`, default 0.001): discourages large jumps between neighbouring reaches.
- **Prior anchor** (off by default): an optional pull toward the initial values, similar to the Tikhonov regularisation of the MATLAB version.

Bounds and optimiser

- I between 10^{-10} and $10^{-2} \text{ m}^3/(\text{m}\cdot\text{s})$, h between 0.001 and 1 m, t_h between 60 s and 12 h. The bounds are enforced in every iteration.
- Initial values: h from column N (0.5 m in the template), t_h 6 h, I a small default.
- PyTorch: Adam warm-up, optionally followed by L-BFGS. TensorFlow: Adam.

Hyporheic depth from bedforms

With `--bedform-depth`, h is calculated instead of estimated, from the bedform height H in column N, using the dynamic-head relation of Elliott & Brooks (1997, after Fehlman, 1985):

$$h_m = 0.28 \cdot \frac{\bar{U}^2}{2g} \cdot \left(\frac{H}{0.34 d} \right)^m \quad m = 3/8 \text{ if } H/d \leq 0.34, \text{ else } 3/2 \cdot \bar{U} = Q/(w \cdot d)$$

The inversion then fits only I and t_h . This reduces the trade-off between the hyporheic parameters.

9 Uncertainty analysis

9.1 Parameter uncertainty

After the fit, FINIFLUX approximates the posterior distribution of the parameters around the best estimate (a Laplace approximation). The default `gauss_newton` method builds the curvature from the model's sensitivities and is always stable; `full` uses the exact second derivatives.

- **Noise level:** by default the misfit weighting (the larger of the observation and the detection limit). If you know your measurement uncertainty, pass it with `--rn-sigma-abs` or `--rn-sigma-rel`; it also draws a $\pm\sigma$ band around the observations.
- **Results per reach:** best estimate, standard deviation and 95 % credible interval for I , h and t_h , written to `uncertainty.csv` and drawn as bands in the figure.
- **Identifiability report:** radon alone often cannot separate groundwater inflow from hyporheic exchange. The report lists the eigenvalues of the curvature matrix; near-zero values reveal parameter combinations the data cannot constrain.

9.2 Groundwater endmember uncertainty

The radon activity of groundwater is usually the largest single source of error in radon-based inflow estimates: a higher endmember means less inflow is needed to explain the same river radon. If column U holds the endmember standard deviation, FINIFLUX treats each endmember as a normal distribution and repeats the fit with its low and high percentiles (5 % and 95 % by default). The resulting range of I and of cumulative inflow is drawn in a second figure and written to `endmember_uncertainty.csv`.

10 Outputs

All results are written to the output folder (`results/` by default):

FILE	CONTENT	UNIT
<code>gw_inflow.dat</code>	Groundwater inflow I per reach	$\text{m}^3 / (\text{m} \cdot \text{s})$
<code>depth_hz.dat</code>	Hyporheic depth h per reach (calculated in bedform mode)	m
<code>rtimes_hz.dat</code>	Mean hyporheic residence time t_h per reach	s
<code>Rn_modeled.csv</code>	Location and modelled radon at every node	m, Bq/m ³
<code>finiflux_plots.png</code>	Main figure, five panels (below)	
<code>uncertainty.csv</code>	Per reach and parameter: best estimate, standard deviation, credible interval	
<code>endmember_uncertainty.csv</code>	Endmember percentiles, the re-fitted inflows and the resulting range	
<code>finiflux_plots_endmember.png</code>	Second figure with the endmember uncertainty	

The main figure stacks five panels along the river:

1. Modelled against measured radon, with correlation and RMSE, and a $\pm\sigma$ band when a measurement uncertainty is given.
2. Groundwater inflow I with its credible-interval band.
3. Hyporheic depth h with its band.
4. Residence time t_h with its band.
5. Cumulative groundwater inflow compared with the observed increase in discharge: the water-balance check of [section 11](#), with a credible band.

The y-axes of panels 2 to 5 follow the best estimates, so a very wide interval cannot flatten the curve; exact interval limits are in `uncertainty.csv`.

11 Checking plausibility

A good fit to the radon data does not by itself mean the inflows are realistic. Always compare the estimated groundwater inflow with a simple water balance of the river. The increase in discharge between the first and last sampling point should be explained by groundwater and surface inflows:

$$\Delta Q = Q_{\text{last}} - Q_{\text{first}} \approx GW + \sum Q_{\text{in}} \quad \text{Eq. 2}$$

The total groundwater inflow is the sum over all reaches of the inflow per metre times the reach length:

$$GW = \sum_{i=1 \dots n} I_i \cdot \Delta x_i \quad \text{Eq. 3}$$

Accumulating $I_i \cdot \Delta x_i$ from the first reach downstream and comparing it with the discharge difference at each sampling point shows where groundwater enters and how the two water-balance terms develop along the river. The Python edition draws exactly this comparison in panel 5 of the main figure; in the MATLAB version it had to be done by hand in a spreadsheet.

Interpreting the comparison

- $GW < \Delta Q$ is the usual result in gaining rivers: unmonitored, diffuse surface inflows also add water.
- $GW > \Delta Q$ can be plausible in rivers that lose water to the aquifer in some reaches, or where water flows through gravel banks and meanders (parafluvial flow) and re-enters with a groundwater-like radon signal. FINIFLUX cannot separate this flow and counts it as groundwater.

Example, Avon River: $\Delta Q = 0.291 - 0.145 = 0.146 \text{ m}^3/\text{s}$ with no tributaries, but $GW = 0.738 \text{ m}^3/\text{s}$. The Avon has losing reaches and substantial parafluvial flow, which explains the difference (Cartwright & Hofmann, 2016).

12 If the fit is poor

- **The optimiser has not converged.** Increase `--adam` (and, with PyTorch, `--lbfgs`), or lower the learning rate `--lr` if the misfit jumps between iterations.
- **Reach-to-reach values are noisy.** Increase `--smooth` step by step (e.g. 0.01, 0.1) and check that the radon fit stays acceptable.
- **Strong mismatch at specific points.** Check degassing first: weirs, waterfalls and riffles degas far more than the empirical models assume. Use measured or weir-derived k ($C8 = 3$) for those reaches.
- **Mismatch below confluences.** Check the inflow elements: inflow length equal to reach length, correct tributary discharge and radon, and a mixed radon value at the node below.
- **Parameters at their bounds or very wide intervals.** Read the identifiability report. If h and t_h trade off against I , try `--bedform-depth`, switch hyporheic exchange off as a test, or add independent information.
- **Inflows that seem too large or small overall.** Revisit the groundwater endmember and run the endmember analysis (column U).
- **TensorFlow fails to import.** Install a wheel that matches your processor, or use `--backend pytorch`.

13 Example datasets

Avon River, Australia (simple case)

Radon data from Cartwright & Hofmann (2016). The Avon River in the Gippsland Basin, Victoria, drains Mt. Wellington (664 m a.s.l.) and runs 122 km to Lake Wellington. About 30 % of the catchment lies in mountainous headwaters and 70 % in lowland plains, where the river has formed a wide gravel channel with riffle–pool sequences. The example uses 50 km of the middle and lower river. In the dry Australian climate there are no tributaries, and the river is a single channel fed only by groundwater, as close as it gets to an ideal two-box system. The coarse bed allows some hyporheic exchange.

The input contains only the basic data: no tributaries and no user degassing values. Reach lengths range from 700 m to 8 km and radon from 170 to 2000 Bq/m³, with a pronounced hot spot in the middle reaches. The groundwater endmember is held constant at 20 000 Bq/m³, and hyporheic exchange is switched on with a power-law RTD. Because the empirical degassing models were developed for rivers like this, the fit is excellent. The water balance is somewhat overestimated, because parafluvial flow through gravel banks and meanders, with residence times above 21 days, appears as groundwater.

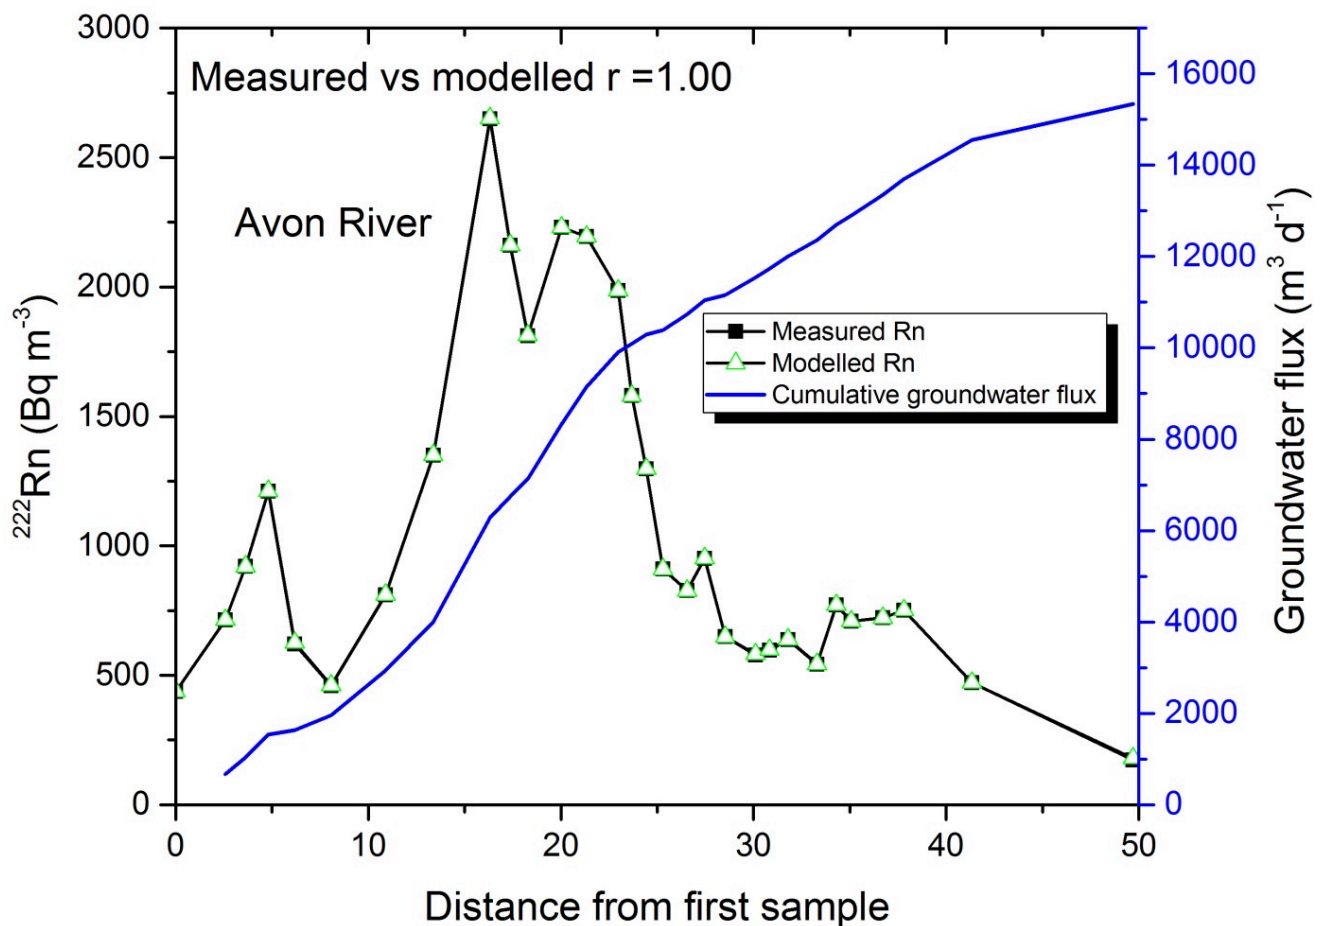


Figure 3. Avon River: measured and modelled radon (left axis) and cumulative groundwater flux (right axis) against distance from the first sample in km. Measured against modelled $r = 1.00$. From the MATLAB version.

Selke River, Germany (complex case)

The Selke drains the Harz Mountains in central Germany and flows north to join the Bode. It starts in mountainous headwaters, crosses an upland plateau and then runs through gravel-bed lowlands with intensive agriculture. It has many tributaries, of which the largest were measured. Differential gauging shows that the lower river both loses and gains water: water leaves the channel in some reaches and rejoins it a few kilometres downstream. A waterfall in the middle reaches complicates degassing further.

- **Tributaries:** five confluences are entered as 1 m inflow elements, recognisable in the node list as locations that increase by only 1 m. The node above each confluence has a measured radon activity; the node below has the mixed value from Eq. 1. [Confluence mixing →](#)
- **Waterfall:** the reach containing the waterfall is only 20 m long. Its radon loss was assumed to be due entirely to degassing, and k was calculated from it. [Weir and waterfall degassing →](#)
- **Other reaches:** k was calculated offline with the O'Connor & Dobbins model and entered as user values ($C8 = 3$). Measured degassing is always best but hard to obtain over long rivers; comparisons of conservative chloride and radon show that the empirical models perform well (Atkinson et al., 2013). [Degassing models by reach →](#)

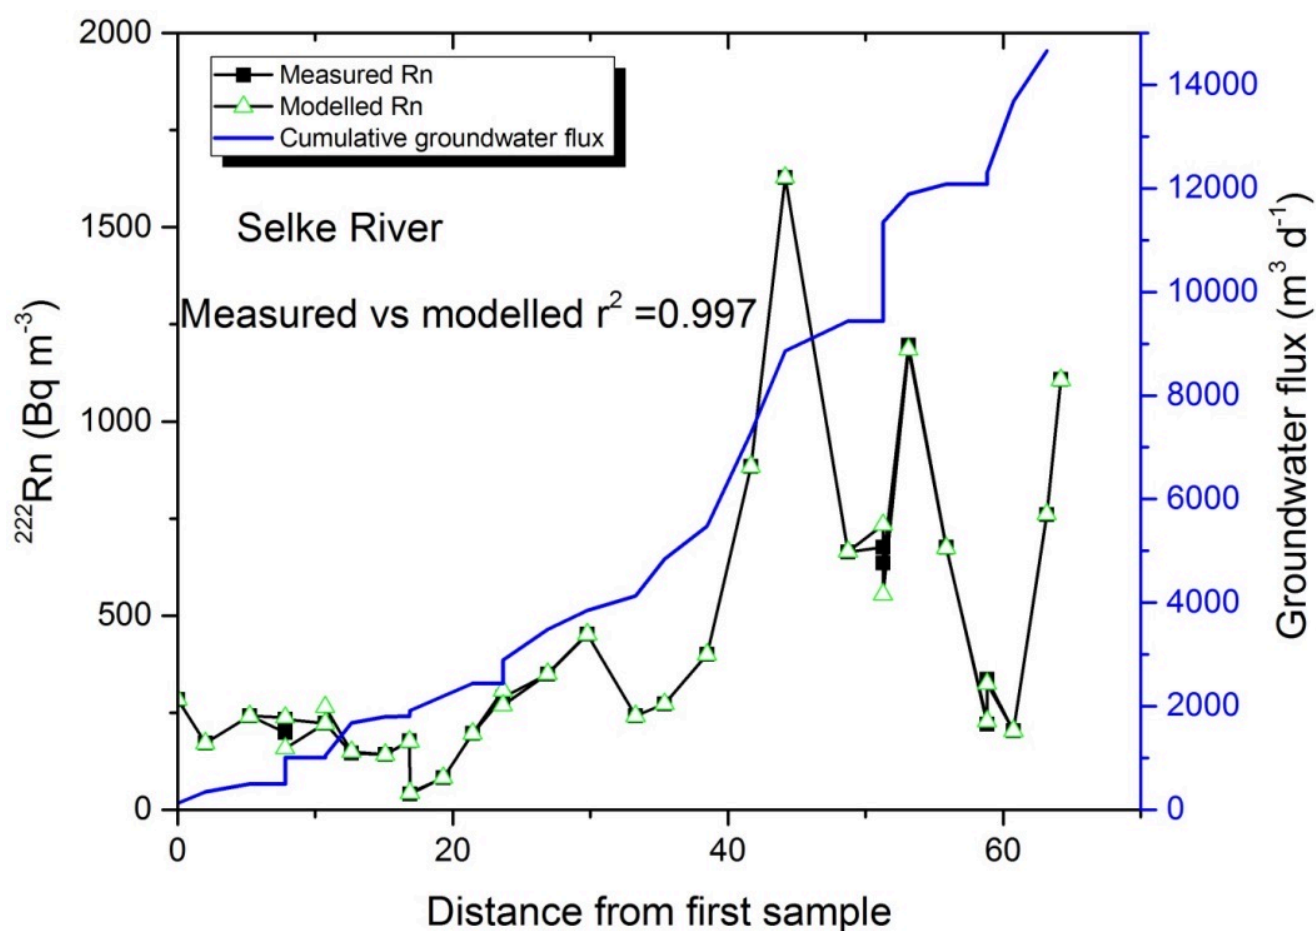


Figure 4. Selke River: measured and modelled radon (left axis) and cumulative groundwater flux (right axis) against distance from the first sample in km. Measured against modelled $r^2 = 0.997$. From the MATLAB version.

The input files for both examples are included in the [Examples](#) folder of the FINIFLUX download. Open one in the [input builder](#) to see its network and profile.

A The MATLAB / BEOPEST version

The original FINIFLUX 2.x remains available and uses the same input file. This appendix summarises how it is installed and run.

Downloads

- Trier University (recommended; MATLAB source and compiled executables): [FINIFLUX 2.1 download](#)
- University of Bayreuth (MATLAB source and compiled executables): hydro.uni-bayreuth.de
- GitHub (MATLAB source): github.com/saluisto/FINIFLUX
- Video tutorial: [FINIFLUX on YouTube](#)

Installation

- **Without a MATLAB licence:** on 64-bit Windows, run `Install_Finiflux.exe` with an internet connection. It downloads the MATLAB Runtime (about 700 MB). If the installer cannot reach the MATLAB server, install the Runtime for MATLAB 2015b (version 9.0) manually from mathworks.com.
- **With a MATLAB licence:** compile `finiflux.m`, `pre_pest.m` and optionally `pest_progress.m` with the Application Compiler app; the executables appear in the `for_testing` folder.
- If `pre_pest.exe` cannot copy files because `msvcp110.dll` is missing, install both the x64 and x86 Microsoft Visual C++ 2012 redistributables.

Running a calibration

1. Create a run folder (short name, no spaces) and copy `Beopest64.exe`, `FINIFLUX.exe`, `FINIFLUX.xlsx`, `pre_pest.exe`, `write_pest.exe`, optionally `pest_tracker.exe` and, for regularisation, `addreg1.exe` and `add.bat` into it.
2. Open a command prompt in the run folder and run `pre_pest.exe`. It creates the run files and the slave folders. Run it again after every change to the input file.
3. Find the computer name with `hostname`, then start the master: `Beopest64 finiflux /H :4004`.
4. Open a command prompt in each slave folder and start the slave: `Beopest64 finiflux /H hostname:4004`. Keep the computer from going to sleep.
5. Optionally follow progress with `pest_tracker.exe`: modelled against measured radon, correlation per iteration, and inflow per reach.

If the optimisation fails or fits poorly, copy `addreg1.exe` and `add.bat` into the master and all slave folders, run `pre_pest.exe`, run `add.bat` in every folder to add Tikhonov regularisation, and then start master and slaves again.

Results

BEOPEST writes `finiflux.rec` (run record), `finiflux.sen` (parameter sensitivities) and `finiflux.res` (residuals) to the run folder. A final run with the best parameters, usually in `slave1`, writes `gw_inflow.dat`, `depth_hz.dat`, `rtimes_hz.dat` and `Rn_modeled.csv` with the same meaning as in the Python edition.

B References

- Sven Frei · Aquatic Ecology and Water Quality Management group, Wageningen University & Research
Atkinson, A.P., Cartwright, I., Gilfedder, B.S., Hofmann, H., Unland, N.P., Cendon, D.I. & Chisari, R.
sven.frei@wur.nl [LinkedIn](#)
(2013). A multi-tracer approach to quantifying groundwater inflows to an upland river; assessing the influence of variable groundwater chemistry. *Hydrological Processes*. doi:10.1002/hyp.10122
- Benjamin Silas Gilfedder · Hydrology, Trier University, gilfedder@uni-trier.de [University profile](#)
- Cartwright, I. & Hofmann, H. (2016). Using radon to understand parafluvial flows and the changing locations of groundwater inflows in the Avon River, southeast Australia. *Hydrology and Earth System Sciences*, 20, 3581–3600. doi:10.5194/hess-20-3581-2016
- Doherty, J.E. (2010). *Methodologies and Software for PEST-Based Model Predictive Uncertainty Analysis*. Watermark Numerical Computing, Brisbane, Australia.
- Elliott, A.H. & Brooks, N.H. (1997). Transfer of nonsorbing solutes to a streambed with bed forms: Theory. *Water Resources Research*, 33(1), 123–136.
- Fehlman, H.M. (1985). *Resistance components and velocity distributions of open channel flows over bedforms*. MSc thesis, Colorado State University.
- Frei, S. & Gilfedder, B.S. (2015). FINIFLUX: An implicit finite element model for quantification of groundwater fluxes and hyporheic exchange in streams and rivers using radon. *Water Resources Research*, 51, 6776–6786. doi:10.1002/2015WR017212
- Frei, S., Durejka, S., Le Lay, H., Thomas, Z. & Gilfedder, B.S. (2019). Quantification of hyporheic nitrate removal at the reach scale: Exposure times versus residence times. *Water Resources Research*, 55(11), 9808–9825. doi:10.1029/2019WR025540
- Negulescu, M. & Rojanski, V. (1969). Recent research to determine reaeration coefficients. *Water Research*, 3, 189–202.
- O'Connor, D.J. & Dobbins, W.E. (1958). Mechanisms of reaeration in natural streams. *Transactions of the American Society of Civil Engineers*, 123(1), 641–666.

Published studies that applied FINIFLUX are listed on the [FINIFLUX documentation page](#) .