

OLADOSU SAMUEL

Network Setup So Easy Your GrandParents Could Do It

Scenario 1 – Medium Installation like 280-370 sq. meter

Setup of XWR-3150 Router and add an XAP-1610 Access Point

XWR-3150 Connections

Internet port---From ISP modem

On/off--- Power button


Power—Plug in the power cable

LAN Ports---Connect to Network devices

Reset button---will restore to factory settings

Antenna---wireless router than can offer 2,4 and 5ghz wireless communication


XWR-3150 Connections

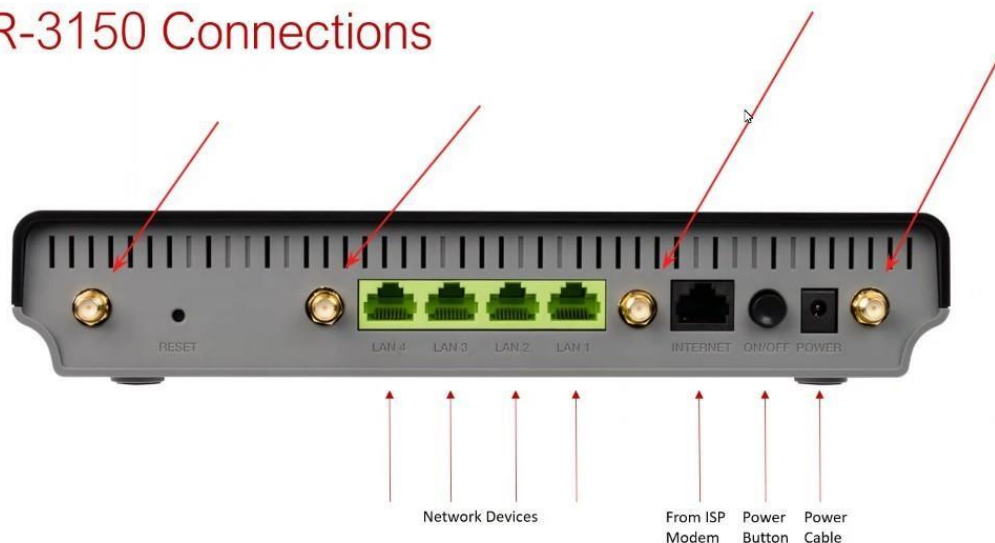

Add an XAP-1610 Access Point

Connect to the LAN Port of the Router the PoE injector IN and then the OUT goes into the Access Point.

XWR-3150 Connections

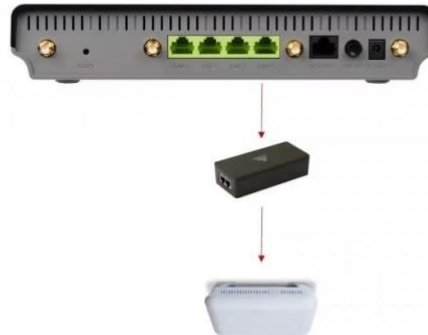

Modem Tips & Tricks to look for

Don't let the IP address of your Luxul router be within the range of the ISP IP address

Modem Tips & Tricks To Look For

- Just A Modem
 - Generally When ISP is Cable
 - Will Be Serving A Single WAN IP Address

Internet / WAN Settings

Connection Type DHCP

IP Address 174.52.81.2XXX

Subnet Mask 255.255.252.0

Gateway 174.52.80.1XXX

DNS Server 75.75.75.75

Alternate DNS 75.75.76.76

- Can Authenticate One Device At A Time
- Common To Require A Reboot When Connecting To A New Device

- Modem/Router Combo
 - Will Be Serving A LAN IP Address
 - Example 192.168.X.X

Internet / WAN1 Settings

Connection Type DHCP

IP Address 192.168.101.212

Subnet Mask 255.255.254.0

Gateway 192.168.100.1

DNS Server 192.168.100.1

Alternate DNS

- Verify Subnet of Router is Different From Subnet of Modem/Router Combo
 - 192.168.0.1 – Luxul
 - 192.168.1.1 – Modem

Scenario 2

Larger Size Installation like 560 sq. meters or more

Have an automation system with many wired devices and 50 wireless

Setup ABR-5000 Router, AMS-4424P Managed Switch, XWC-1000 Wireless Controller

Epic 5 ABR-5000 Connections

2 WAN PORT --- From ISP modem


On/off ----power button

Power---plug in the power cable

LAN 1 —to switch

Switch is like the engine where all the data/power comes from


Epic 5 ABR-5000 Connections

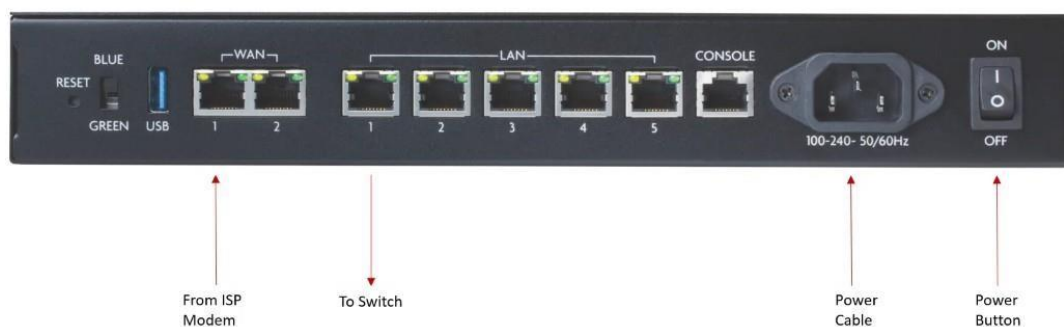

XWC-1000 Connections

Can handle 16 access point in terms of control

XWC-1000 Connections

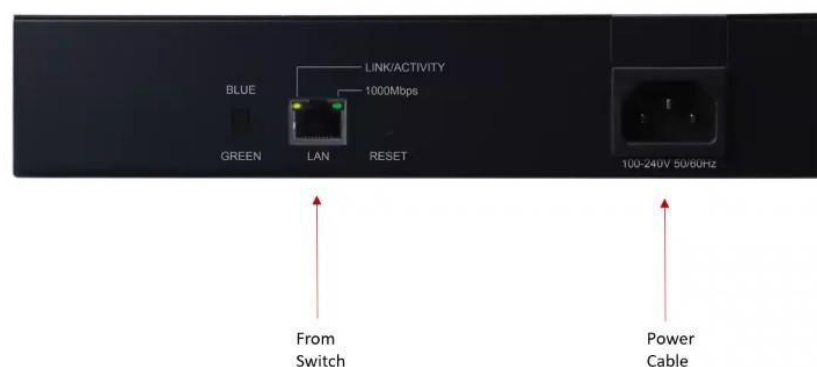

AMS-4424p Connections

No PoE Injector is needed here


Port 1---- from Router

Port 2--- to Controller

PORT 3 & 4---to AP

REST OF THE PORT-- to Network devices

AMS-4424P Connections

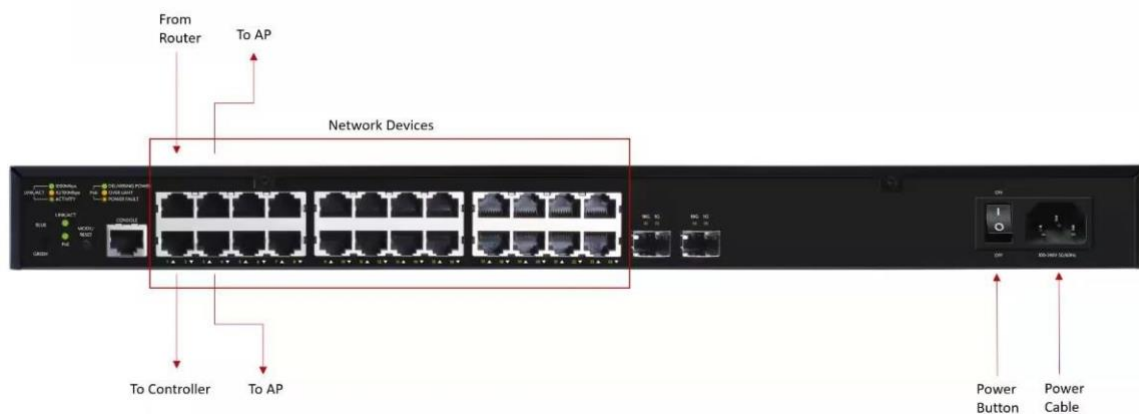

What the Easy Setup App Does

- It allows setup of wireless routers and attached access points from your mobile phone, no laptop required
 - Change login password
 - Update firmware if necessary
 - Add access points if necessary
 - Name your 2.4GHz and 5GHz SSID
 - Set your Wifi password
 - Share network info if necessary

USING THE APP- A FEW THINGS TO NOTE

Easy setup app is available on play store

Router

- It works with XWR-1200 and XWR-3150 wireless routers only
- Router must be in factory default state
 - Factory default SSIDs being broadcast with no password

- Default admin password
- Router firmware is 6.3.1 or higher

Android

- All permissions must be granted, including location services

iOS

- iOS requires user approval every time it wants to join a network, so JOIN button must be pressed

Quick Walk through with Easy Setup App was also learnt.