



Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	1	Char.Descr.	20.00MM BORE 1	Drawing number	40
Char.Class	significant	Nom.val.	20.000 USL 20.017	Subgr.size	10
Unit	mm	Calc.Tol.	0.033 LSL 19.984	Subgr.type	fixed
Char. Remark					

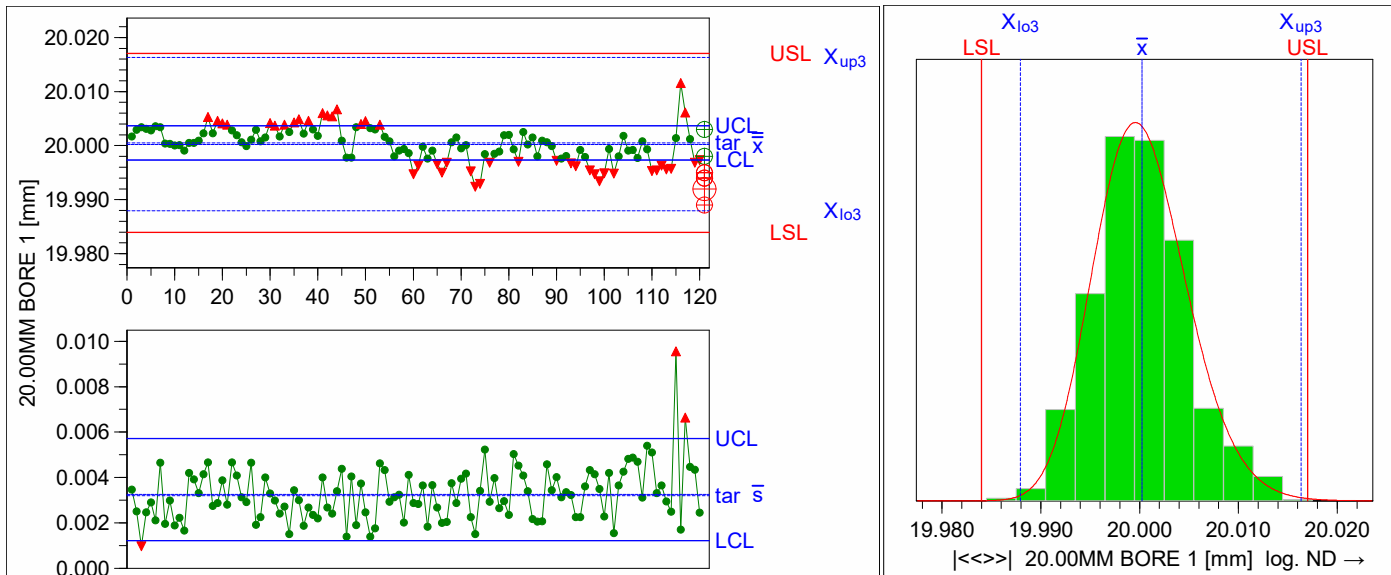


Overall evaluation

Model distribution			Logarithmic Normal Distribution	
Calculation method		M _{2,1}	Percentile (0.135%-50%-99.865%)	
Potential performance index	P _p	1.12 ≤ 1.16 ≤ 1.21	01.67	
Critical performance index	P _{pk}	1.00 ≤ 1.04 ≤ 1.09	01.67	
Ø QDAS_AIAG_2.0.1				

Calculation of inner variation

Potential performance index	C _p	1.63		
Critical performance index	C _{pk}	1.60		
Ø QDAS_AIAG_2.0.1				

Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	2	Char.Descr.	20.00MM BORE 2	Drawing number	40
Char.Class	significant	Nom.val.	20.000 USL 20.017	Subgr.size	10
Unit	mm	Calc.Tol.	0.033 LSL 19.984	Subgr.type	fixed
Char. Remark					

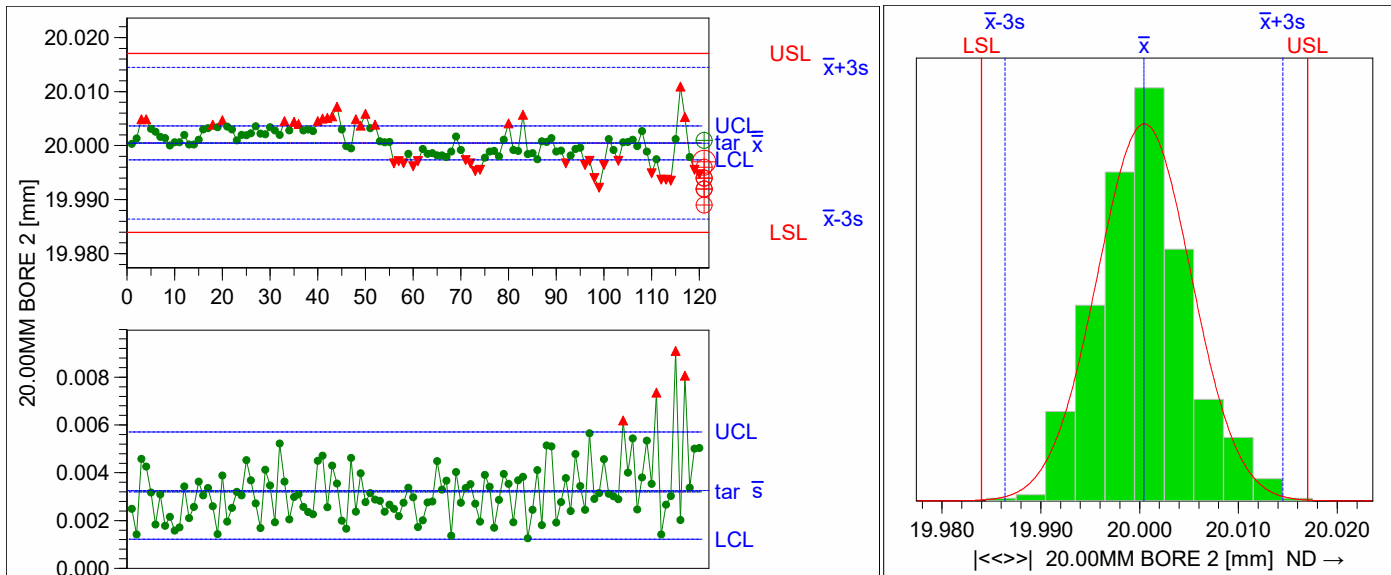


Overall evaluation

Model distribution			Normal Distribution	
Calculation method			M _{2,1} Percentile (0.135%-50%-99.865%)	
Potential performance index	P _p	1.13 ≤ 1.17 ≤ 1.22	0	1.67
Critical performance index	P _{pk}	1.12 ≤ 1.17 ≤ 1.22	0	1.67
Ø QDAS_AIAG_2.0.1				

Calculation of inner variation

Potential performance index	C _p	1.66	0	1.67
Critical performance index	C _{pk}	1.65	0	1.67
Ø QDAS_AIAG_2.0.1				

Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	3	Char.Descr.	25.00MM	Drawing number	40
Char.Class	significant	Nom.val.	25.000 USL 25.026	Subgr.size	10
Unit	mm	Calc.Tol.	0.052 LSL 24.974	Subgr.type	fixed
Char. Remark					

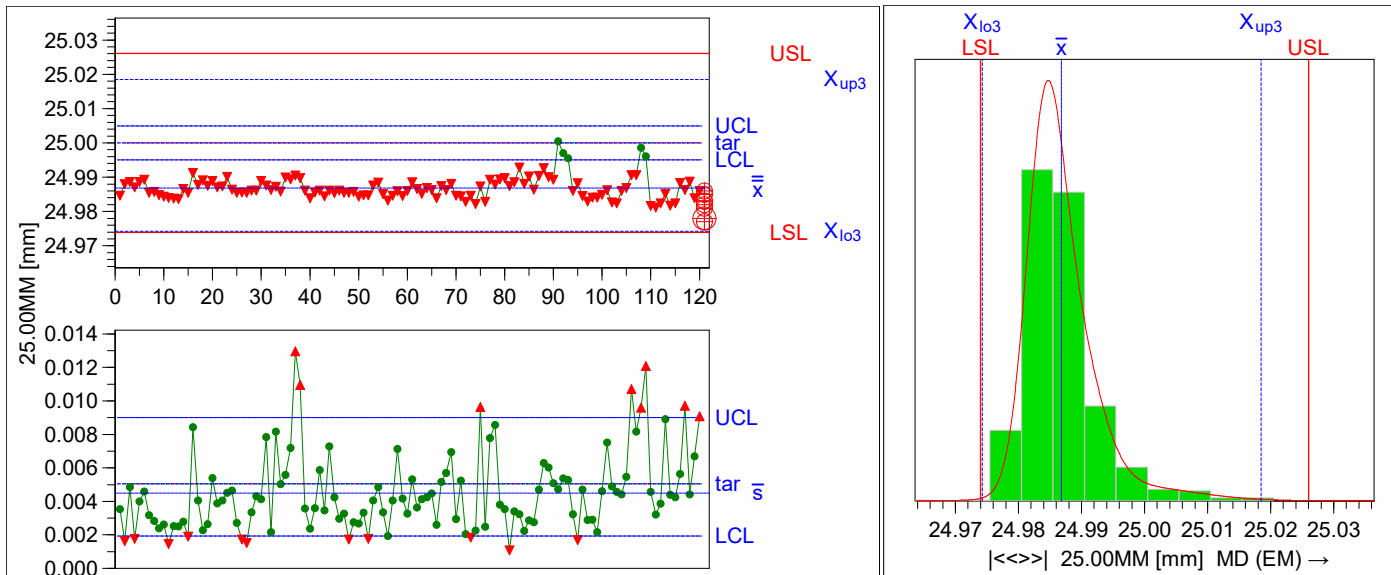


Overall evaluation

Model distribution			Mixed distribution (EM)	
Calculation method			M _{2,1} Percentile (0.135%-50%-99.865%)	
Potential performance index	P _p	1.13 ≤ 1.18 ≤ 1.22	0	1.67
Critical performance index	P _{pk}	0.98 ≤ 1.02 ≤ 1.07	0	1.67
Ø QDAS_AIAG_2.0.1				

Calculation of inner variation

Potential performance index	C _p	1.88	0	1.67
Critical performance index	C _{pk}	0.93	0	1.67
Ø QDAS_AIAG_2.0.1				

Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	4	Char.Descr.	16.00MM BORE 1	Drawing number	40
Char.Class	significant	Nom.val.	16.000 USL 16.021	Subgr.size	10
Unit	mm	Calc.Tol.	0.042 LSL 15.979	Subgr.type	fixed
Char. Remark					

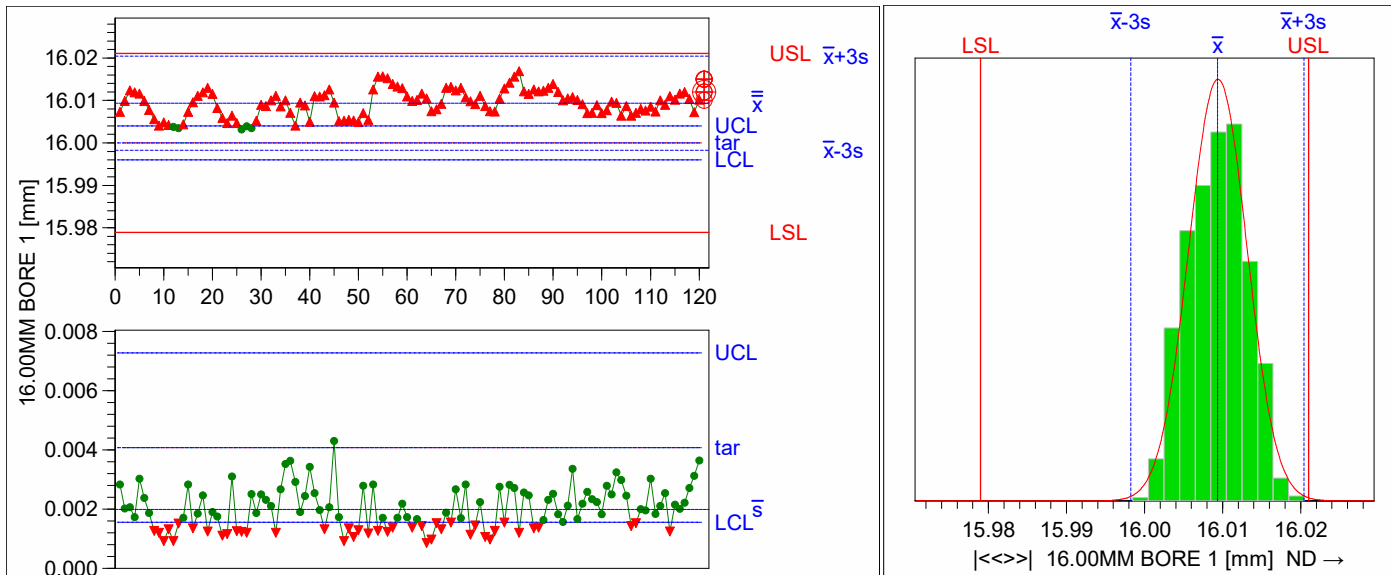


Overall evaluation

Model distribution			Normal Distribution
Calculation method			M _{2,1} Percentile (0.135%-50%-99.865%)
Potential performance index	P _p	1.82 ≤ 1.89 ≤ 1.97	0 1.67
Critical performance index	P _{pk}	1.01 ≤ 1.05 ≤ 1.10	0 1.67
Ø QDAS_AIAG_2.0.1			

Calculation of inner variation

Potential performance index	C _p	3.52	0 1.67
Critical performance index	C _{pk}	1.95	0 1.67
Ø QDAS_AIAG_2.0.1			

Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	5	Char.Descr.	16.00MM BORE 2	Drawing number	40
Char.Class	significant	Nom.val.	16.000 USL 16.021	Subgr.size	10
Unit	mm	Calc.Tol.	0.042 LSL 15.979	Subgr.type	fixed
Char. Remark					

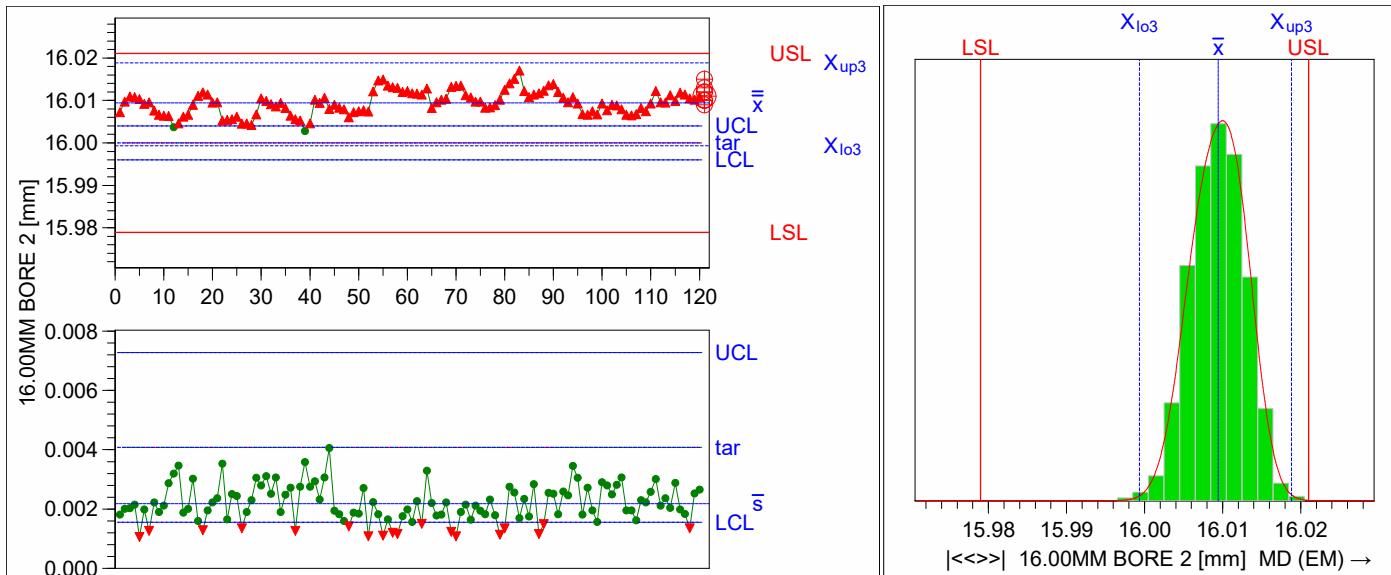


Overall evaluation

Model distribution			Mixed distribution (EM)
Calculation method			M _{2,1} Percentile (0.135%-50%-99.865%)
Potential performance index	P _p	2.07 ≤ 2.16 ≤ 2.24	0 1.67
Critical performance index	P _{pk}	1.18 ≤ 1.23 ≤ 1.29	0 1.67
Ø QDAS_AIAG_2.0.1			

Calculation of inner variation

Potential performance index	C _p	3.14	0 1.67
Critical performance index	C _{pk}	1.73	0 1.67
Ø QDAS_AIAG_2.0.1			

Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	6	Char.Descr.	30.00 MM BORE 1	Drawing number	40
Char.Class	significant	Nom.val.	30.000 USL 30.026	Subgr.size	10
Unit	mm	Calc.Tol.	0.052 LSL 29.974	Subgr.type	fixed
Char. Remark					

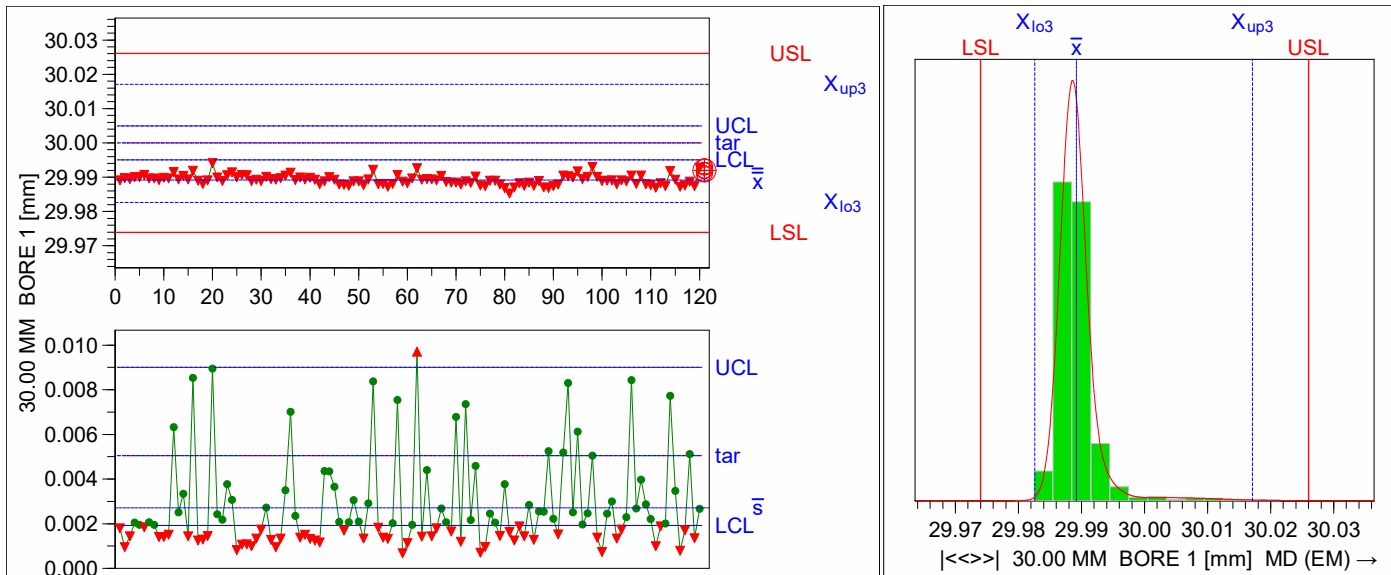


Overall evaluation

Model distribution			Mixed distribution (EM)
Calculation method			M _{2,1} Percentile (0.135%-50%-99.865%)
Potential performance index	P _p	1.45 ≤ 1.51 ≤ 1.57	0 1.67
Critical performance index	P _{pk}	1.26 ≤ 1.31 ≤ 1.37	0 1.67
Ø QDAS_AIAG_2.0.1			

Calculation of inner variation

Potential performance index	C _p	3.03	0 1.67
Critical performance index	C _{pk}	1.77	0 1.67
Ø QDAS_AIAG_2.0.1			



Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	7	Char.Descr.	30.00 MM BORE 2	Drawing number	40
Char.Class	significant	Nom.val.	30.000 USL 30.026	Subgr.size	10
Unit	mm	Calc.Tol.	0.052 LSL 29.974	Subgr.type	fixed
Char. Remark					

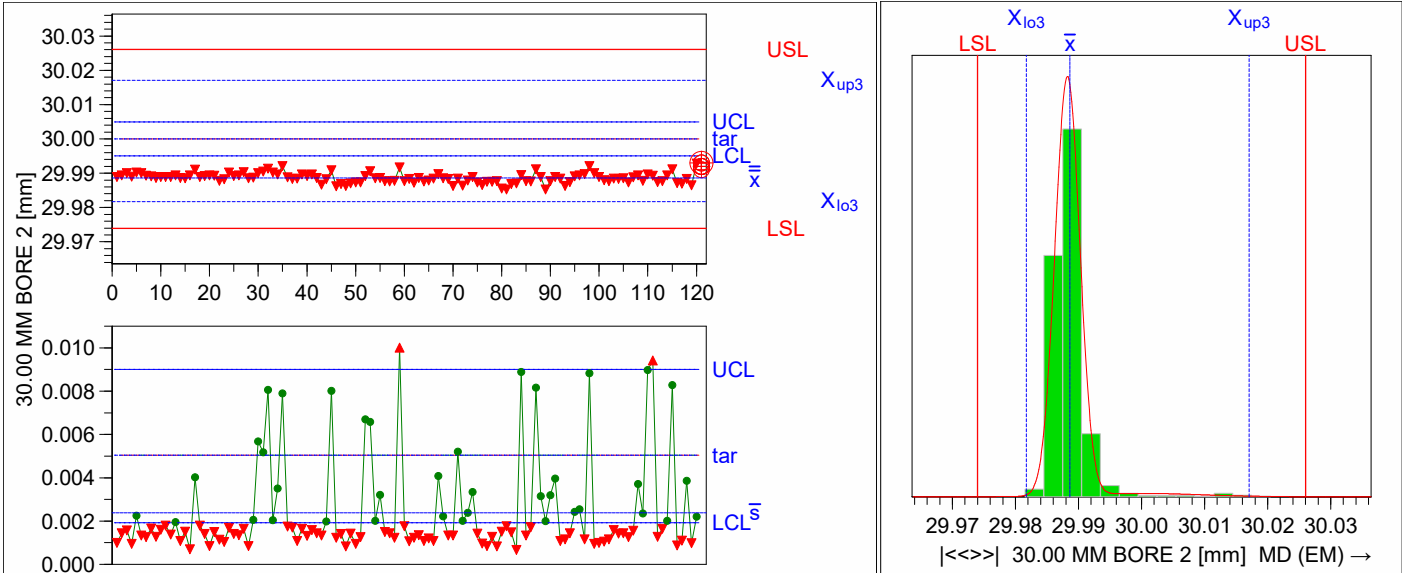


Overall evaluation

Model distribution			Mixed distribution (EM)	
Calculation method		M _{2,1}	Percentile (0.135%-50%-99.865%)	
Potential performance index	P _p	1.41 ≤ 1.47 ≤ 1.53	01.67	
Critical performance index	P _{pk}	1.26 ≤ 1.31 ≤ 1.37	01.67	
Ø QDAS_AIAG_2.0.1				

Calculation of inner variation

Potential performance index	C _p	3.43		
Critical performance index	C _{pk}	1.93		
Ø QDAS_AIAG_2.0.1				

Op.Name.	QDAS_USER	Evaluation from	02-06-2025 09:49:37	Evaluation to	19-06-2025 19:34:57
Part no.	46354712	Part descr.	FCA_4C_BLOCK	OP no.	HMC1 OPN_40
Char.No.	8	Char.Descr.	30.00 MM BORE 3	Drawing number	40
Char.Class	significant	Nom.val.	30.000 USL 30.026	Subgr.size	10
Unit	mm	Calc.Tol.	0.052 LSL 29.974	Subgr.type	fixed
Char. Remark					

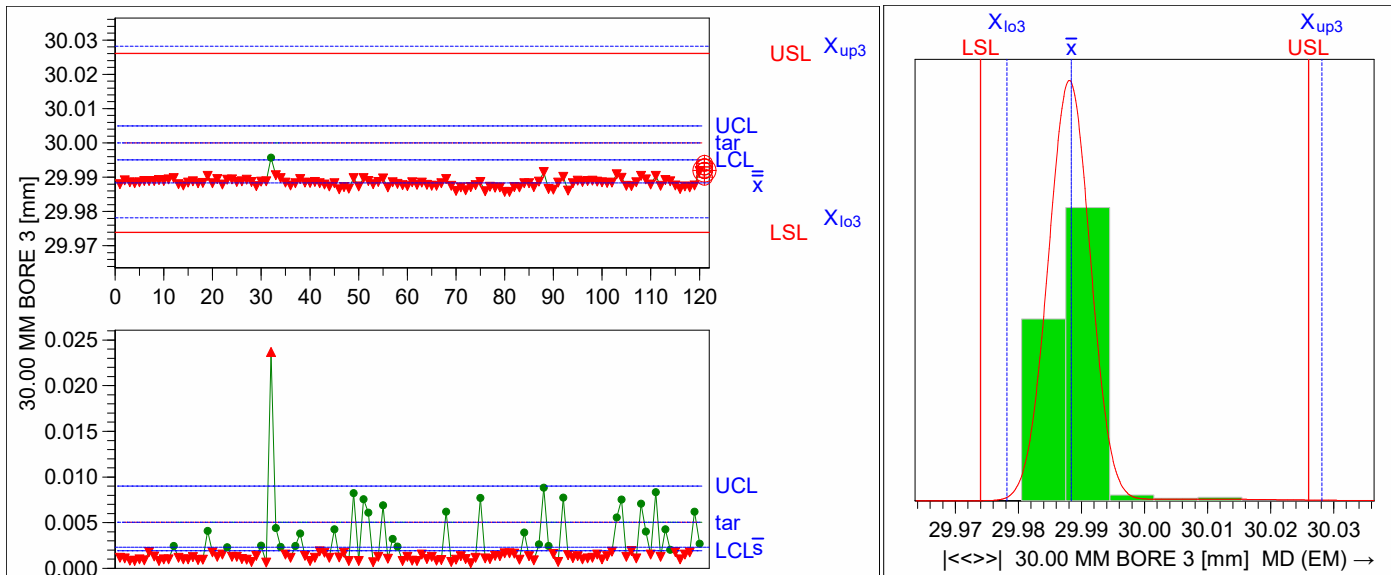

Overall evaluation

Model distribution			Mixed distribution (EM)	
Calculation method			M _{2,1} Percentile (0.135%-50%-99.865%)	
Potential performance index	P _p	1.00 ≤ 1.04 ≤ 1.08	0	1.67
Critical performance index	P _{pk}	0.90 ≤ 0.95 ≤ 0.99	0	1.67
Ø QDAS_AIAG_2.0.1				

Calculation of inner variation

Potential performance index	C _p	3.54	0	1.67
Critical performance index	C _{pk}	1.96	0	1.67
Ø QDAS_AIAG_2.0.1				