


1.

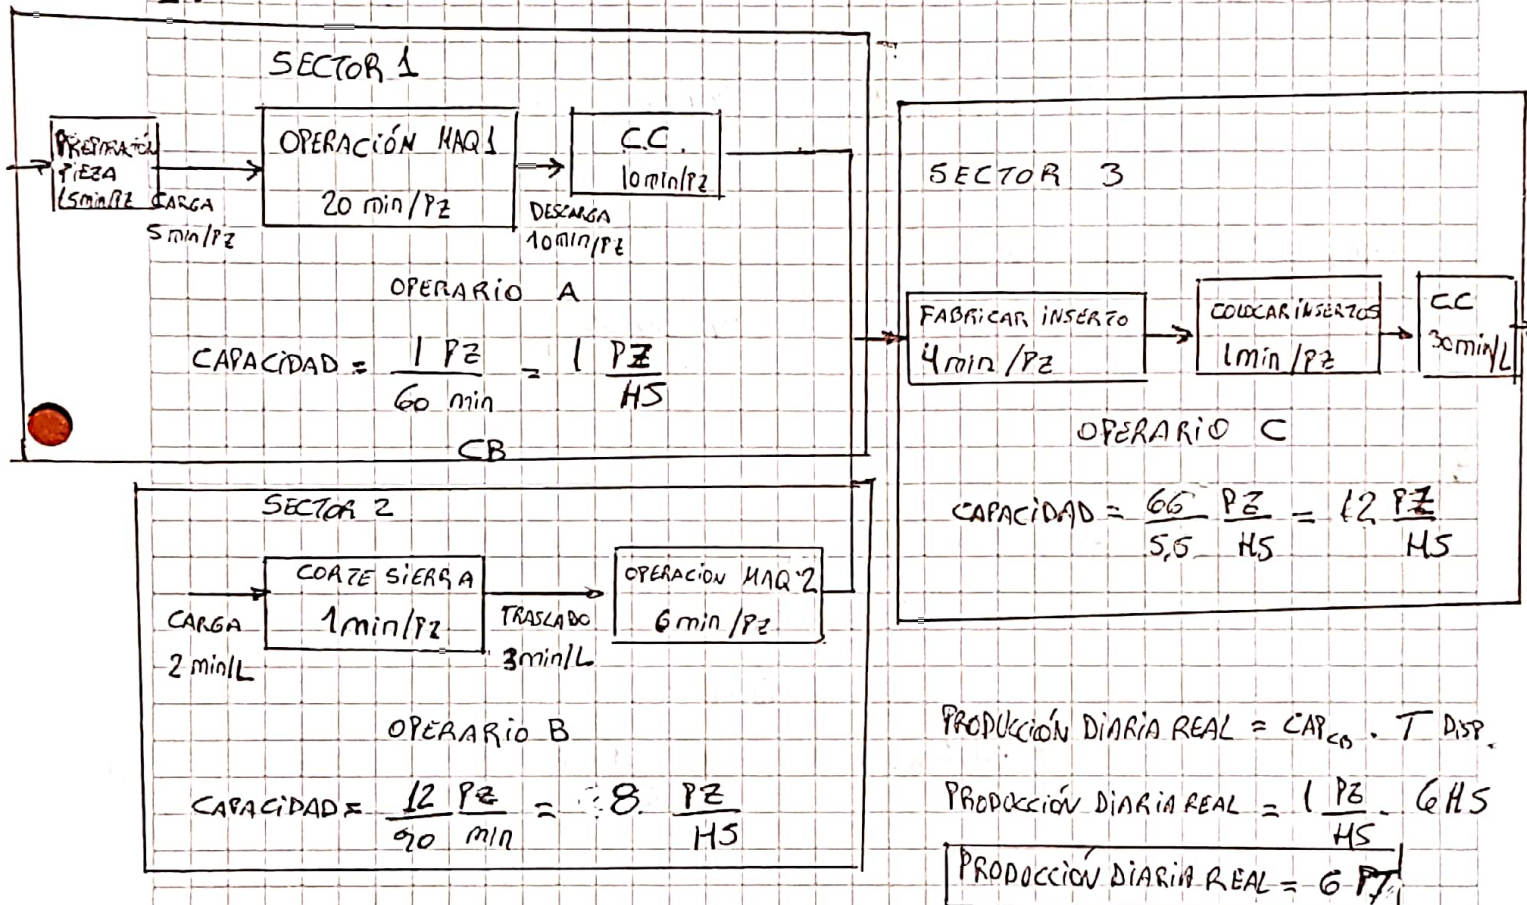

$$2. \quad L_{BARRA} = D + Q_{PZ/B} (A_{CORTE} + L_{PZ}) + CB + A_{CORTE}$$

$$Q_{PZ/B} = \frac{L_{BARRA} - D - CB - A_{CORTE}}{A_{CORTE} + L_{PZ}}$$

$$Q_{PZ/B} = \frac{60 \text{ dm} - 1,5 \text{ dm} - 2 \text{ dm} - 0,02 \text{ dm}}{0,02 \text{ dm} + 4,5 \text{ dm}}$$

$$Q_{PZ/B} = 12,49 \Rightarrow Q_{PZ/B} = 12 \text{ PZ} \Rightarrow Q_{RR} = \frac{24 \text{ PZ}}{12 \text{ PZ/B}} = 2 \text{ BARRAS}$$

Considero a ELEZ como cilíndrico:

$$P_{NU} = P_E \cdot V_{PZ}$$

$$P_{NU} = 2,6 \frac{\text{Kg}}{\text{dm}^3} \cdot (0,25 \text{ dm})^2 \cdot \pi \cdot 4,5 \text{ dm}$$


$$P_{NU} = 2,30 \frac{\text{Kg}}{\text{PZ}}$$

$$P_N = P_{NU} \cdot Q_{PZ} \cdot 2$$

$$P_N = 2,3 \frac{\text{Kg}}{\text{PZ}} \cdot 12 \text{ PZ} \cdot 2$$

$$P_N = 55,20 \text{ Kg}$$

1.

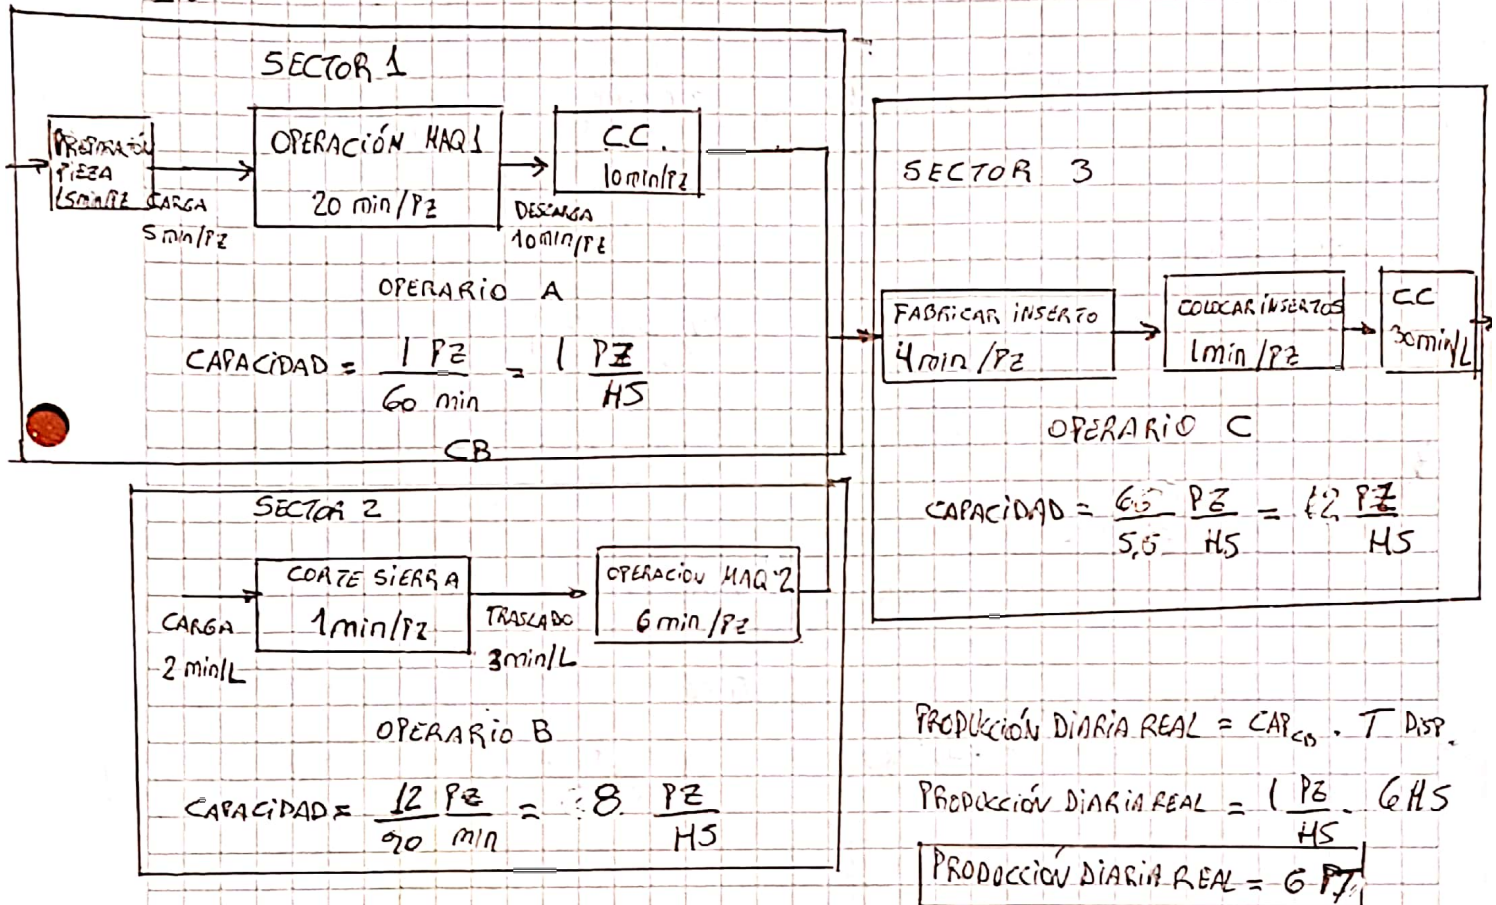

2. $L_{\text{BARRA}} = D + Q_{\text{PZ}} (A_{\text{CORTE}} + L_{\text{PZ}}) + CB + A_{\text{CORTE}}$

$Q_{\text{PZ}} = \frac{L_{\text{BARRA}} - D - CB - A_{\text{CORTE}}}{A_{\text{CORTE}} + L_{\text{PZ}}}$

$Q_{\text{PZ}} = \frac{60 \text{ dm} - 15 \text{ dm} - 2 \text{ dm} - 0,02 \text{ dm}}{0,02 \text{ dm} + 4,5 \text{ dm}}$

$Q_{\text{PZ}} = 12,49 \Rightarrow Q_{\text{PZ}} = 12 \text{ PZ} \Rightarrow Q_{\text{RR}} = \frac{24 \text{ PZ}}{12 \text{ PZ/HS}} = 2 \text{ BARRAS}$

Considero a ELEZ como cilindrico:

$P_{\text{N}} = P_E \cdot V_{\text{PZ}}$

$P_{\text{N}} = 2,6 \frac{\text{Kg}}{\text{dm}^3} \cdot (0,25 \text{ dm})^2 \cdot \pi \cdot 4,5 \text{ dm}$

$P_{\text{N}} = 2,30 \frac{\text{Kg}}{\text{PZ}}$

$P_{\text{N}} = P_{\text{N}} \cdot Q_{\text{PZ}} \cdot 2$

$P_{\text{N}} = 2,30 \frac{\text{Kg}}{\text{PZ}} \cdot 12 \text{ PZ} \cdot 2$

$P_{\text{N}} = 55,20 \text{ Kg}$

$$P_{50} PB = PE \cdot V_{BARRA} \cdot 2 \text{ barras}$$

$$PB = 2,6 \frac{\text{Kg}}{\text{dm}^3} \cdot \pi \cdot (0,25 \text{ dm})^2 \cdot 60 \text{ dm} \cdot 2 \text{ barras}$$

$$PB = 61,26 \text{ Kg}$$

$$\text{Diferencia en Kg} = PB - PN = 61,26 \text{ Kg} - 55,20 \text{ Kg} = 6,06 \text{ Kg}$$

$$61,26 \text{ Kg} \text{ --- } 100\%$$

$$6,06 \text{ Kg} \text{ --- } x = \text{Diferencia \%} = 9,89\%$$

3.

$$PGT = \frac{PT}{\text{Costo } EA + \text{Costo } MP_2 + \text{Costo } insertos + \text{Costo } ADO}$$

$$PGT = \frac{6 \cdot PT}{6 \cdot 100 + 61,26 \text{ Kg} \cdot 25 \frac{\$}{\text{Kg}} + 24 \cdot \$5 + 60 \frac{\$}{\text{HS}} \cdot (4 \text{ HS} + 3 \text{ HS} + 1 \text{ HS})}$$

$$PGT = 0,0022 \frac{\text{uPT}}{\$}$$

$$PGT = \frac{550 \$}{\text{Costo total}} = 0,2013 \frac{\$}{\$}$$

$$4. \text{ Ioc OPERARIO A} = \frac{(P_{11} P_2 + \text{CARGA} + \text{DESCARGA} + CC) \cdot 6}{6 \text{ HS} \cdot \frac{60 \text{ min}}{1 \text{ HS}}}$$

$$\text{Ioc OP A} = \frac{(15 \text{ min} + 5 \text{ min} + 10 \text{ min} + 10 \text{ min}) \cdot 6}{360 \text{ min}}$$

$$\text{Ioc OPA} = 0,67$$

159.074-1

Aldo Matos Jara

1º Recuperatorio del 2º Parcial de EDT

Hoja N° 2 de 3

06/02/20

$$I_{oc} \text{ OPB} = \frac{\text{CARGA} \cdot 2 + \text{CORTE} \cdot 26 + \text{TRASLADO} \cdot 2 + \text{MAQUINADO} \cdot 24}{360 \text{ min}}$$


$$I_{oc} \text{ OPB} = \frac{2 \text{ min} \cdot 2 + 1 \text{ min} \cdot 26 + 3 \text{ min} \cdot 2 + 6 \text{ min} \cdot 24}{360 \text{ min}}$$

$$I_{oc} \text{ OPB} = 0,5$$

$$I_{oc} \text{ OPC} = \frac{\text{FABRICACIÓN INSERTOS} \cdot 24 + \text{COLOCACIÓN INSERTOS} \cdot 24 + \text{C.C.}}{360 \text{ min}}$$

$$I_{oc} \text{ OPC} = \frac{1 \text{ min} \cdot 24 + 0,25 \text{ min} \cdot 24 + 30 \text{ min}}{360 \text{ min}}$$

$$I_{oc} \text{ OPC} = 0,17$$

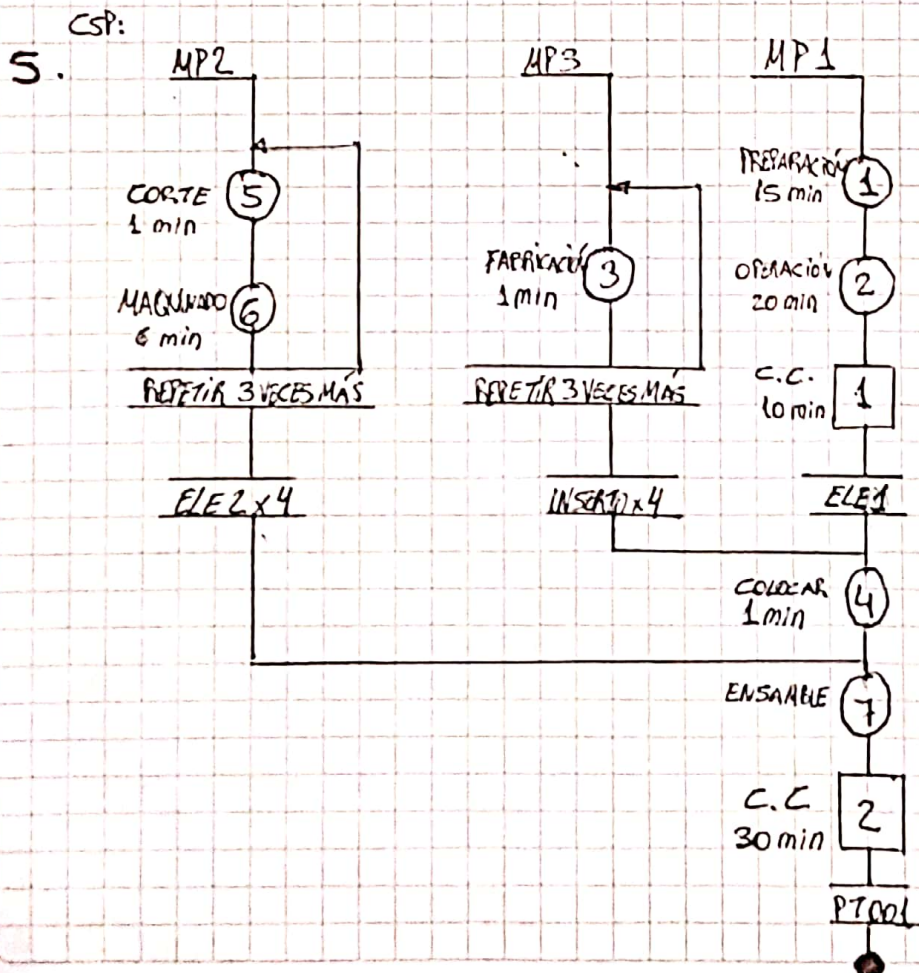

Matos

159.074-1

Ndo Matos Jara

HOJA N° 3 de 3

C.A. SECTOR 3

tiempo de colocación

ciclo	V	T _o	T _B
1	105	24	25
2	95	26	25
3	105	24	25
4	100	25	25
5	110	23	25
6	110	23	25
7	105	24	25
8	100	25	25
9	95	27	26
10	90	27	24

$$\overline{T_{B_i}} = \frac{\sum T_{B_i}}{10}$$

$$\overline{T_{B_E}} = 25CM = 0,25min$$

1min = 100CM

0,25min = 25CM

Matos