SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

中文 | English

Search

Home   **About Us**   **Products**   **Service&Support**   **demo**   **Contact Us**

TECHNOLOGY make
the world more convenient!
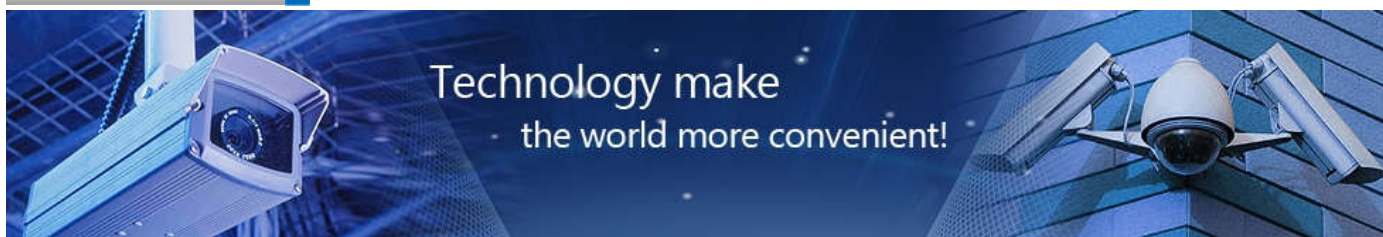
EDR-6832L

32 ch CIF
p2p cloud
2*2T HDD
16ch playback

Print

Specification

Model	EDR-6832L
Video Input	32CH, BNC(1.0Vp-p, 75Ω)
Video Output	1 TV, BNC(1.0V p-p, 75Ω), 1 VGA
Video Standard	PAL / NTSC
Audio Input	8CH, RCA(200-2800mV,30KΩ)
Audio Output	1CH, RCA(200-3000mV,5KΩ)
Display split	1/4/9/16/32
Resolution	1440*900, 1360*768, 1280*1024, 1024*768, 800*600
Video/Audio compression	H.264/G711
Image resolution	D1(704x576/704x480), HD1(704x288/704x240), CIF(352x288/352x240)
Main stream	CH1~32CIF(1~25/30FPS)
Sub stream	QCIF(1~25/30FPS)
Alarm input	8CH
Alarm output	2CH
Playback channel	1/4/16
Playback speed	CIF 800/960FPS
Search mode	Time/Date,Alarm,Motion detection Exact search(accurate to second)
Playback function	Play,Pause,Stop,Fast play,Slow play,full screen,backup
Back mode	Flash drive/USB HDD/CD-DVD RW/Network download
Network Interface	RJ-45 port(10/100M)
Network functions	TCP/IP,UDP,DHCP,DNS,IPFilter,PPPoE,DDNS,FTP, Email,UPNP,Alarm Server,ARSP,P2P
HDD Interface	2 SATA Ports, each port support max 2TB HDD or