

INSTRUMENT APPROACH CHART - ICAO	AD ELEVATION: 131' TRANS LEVEL: FL65 TRANS ALT: 5000'	JULIANA APPR 128.95 (PRIMARY) JULIANA TWR 118.7 (SECONDARY) STATIA AFIS 118.10	RNAV (GNSS) RWY 06 FD ROOSEVELT APT (TNCE) ST EUSTATIUS

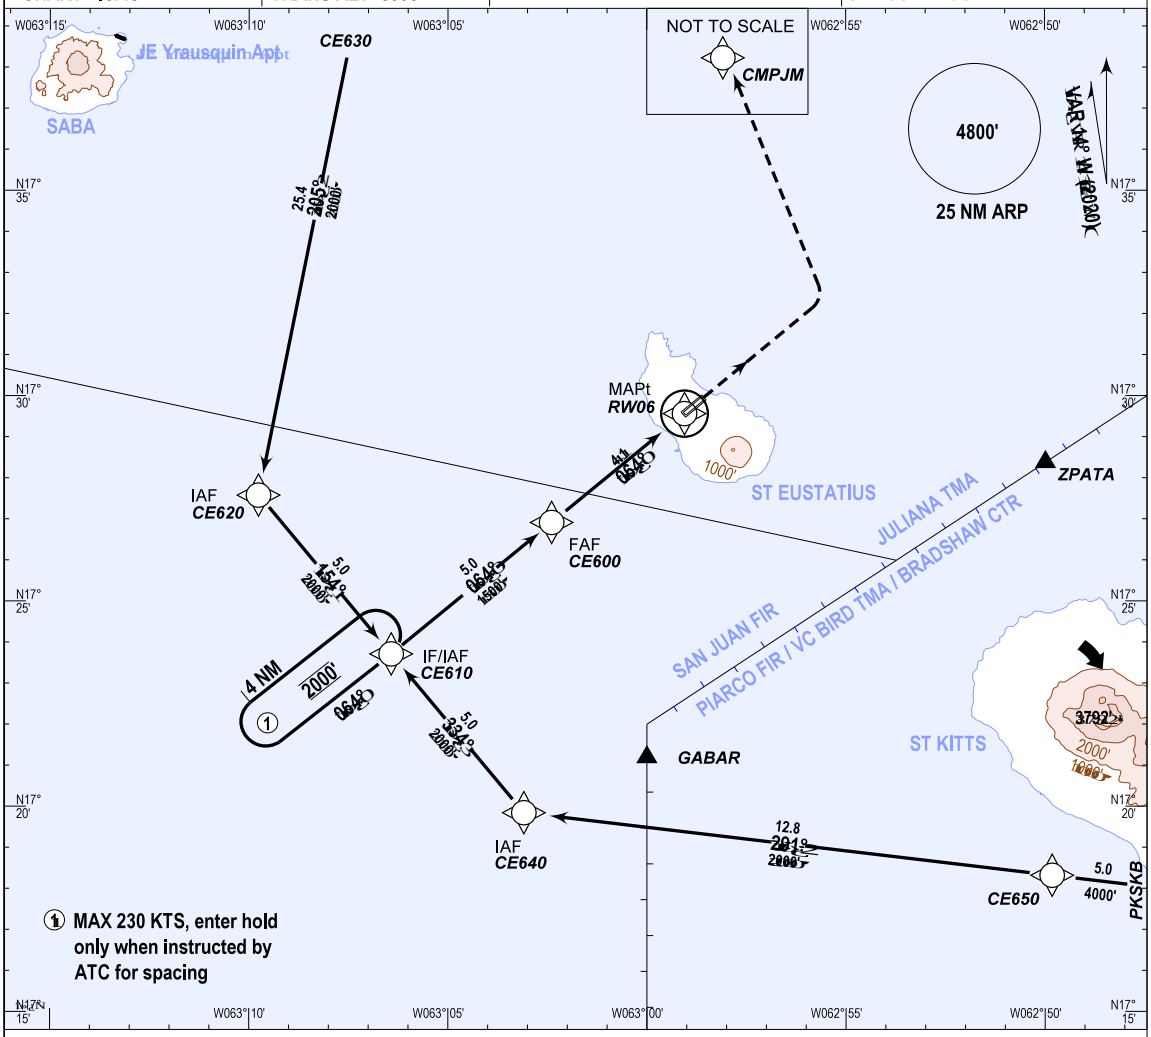

MISSED APCH: Climb on rwy track to 2000', then climbing left turn to 3000' direct CMPJM, or as directed by ATC.
MISSED APCH WITH COMM FAILURE: Same as above. Reaching CMPJM execute available approach to TNCM or proceed to alternate airport.

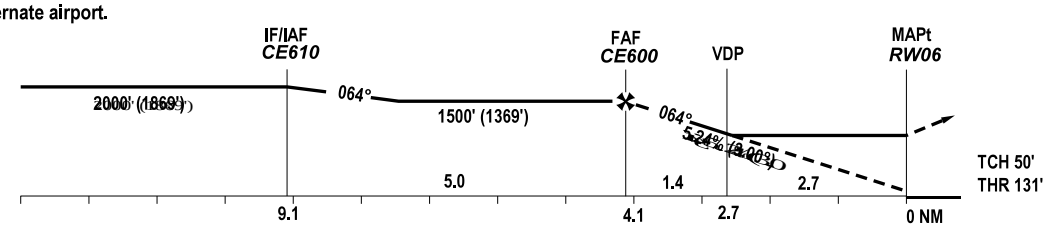

OCA(H)	A	B	C	
LNAV/VNAV	850' (719')	870' (739')	900' (769')	
LNAV	1040' (909')	1040' (909')	1040' (909')	
CIRCLING north side only	1250' (1119')	1250' (1119')	1350' (1219')	

GROUNDSPEED - DESCENT RATE						
KNOTS	70	90	100	120	140	160
FT/MIN	372	478	531	637	743	849

1. GNSS required. DME/DME not authorized.
2. PJM VOR/DME is not part of procedure and is not required.
3. Visual descent point (VDP) is where LNAV OCA intersects 3° descent slope.
4. Bearings are magnetic, altitudes and elevation in feet, heights are relative to AD elevation, distance in NM.
5. Waypoint PKSKB is coincident with SKB NDB.
6. Waypoint CMPJM is coincident with PJM VOR.
7. Waypoint CE630 is coincident with PJM VOR R-180 10 DME.

Fly-over on demand reporting wpt
Fly-by on demand reporting wpt

CHANGES: Editorial

AERO INFO DATE 07 OCT 21