

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2000	2500	480	400	200X300X100
PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm	
	2050	2550	485		

Section at A-A




75x75x6 Angle - Anchored

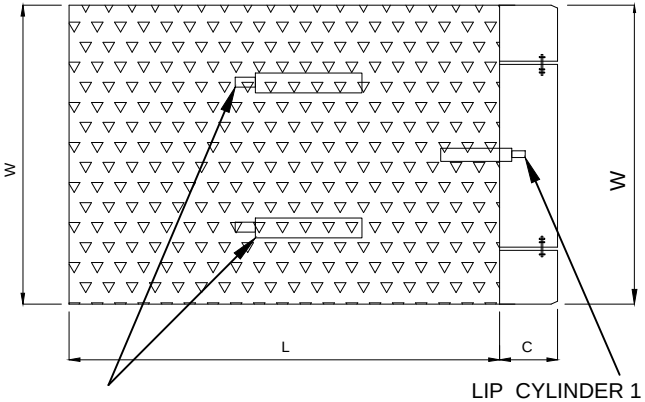


DECK CYLINDER 2 NOS


LIP CYLINDER 1 NOS

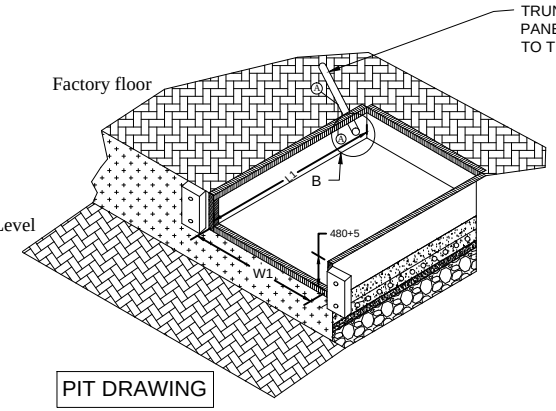

PIT DRAWING

VIEW B



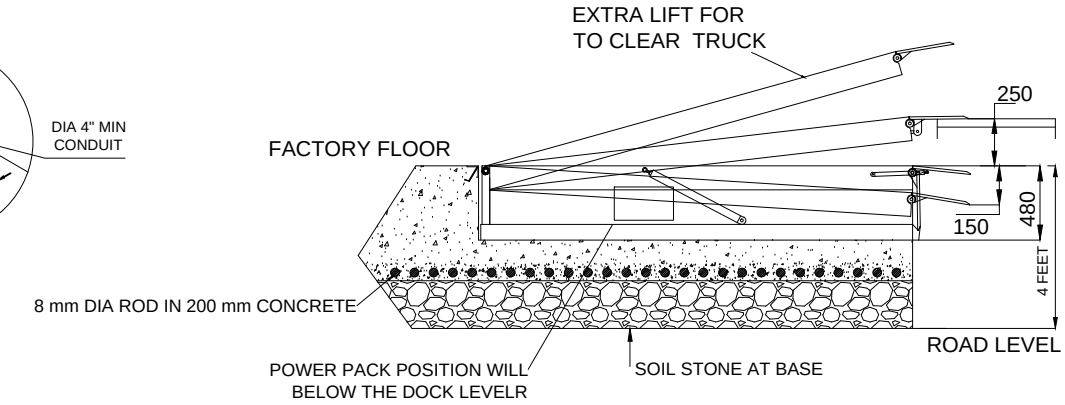

NOTE:-

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

DOCK LEVELER- 09 TON CAPACITY -

CLIENT APPORVAL-	DATE	SIGN.
DRAWN :-		
CHECKED :-		
APPROVED :-		
ALL DIMENSION ARE IN mm		
If any queries contact : projects@nihva.com		

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -

PROJECT -

SITE LOCATION -

DWG. NO. -

REV. -