
Spare part list
RR 600

ALBANY
ASSA ABLOY



2013-05 Index 00

Frame (right)	
Karm (höger)	
Seitenteil (rechts)	
Montant latéral droit	

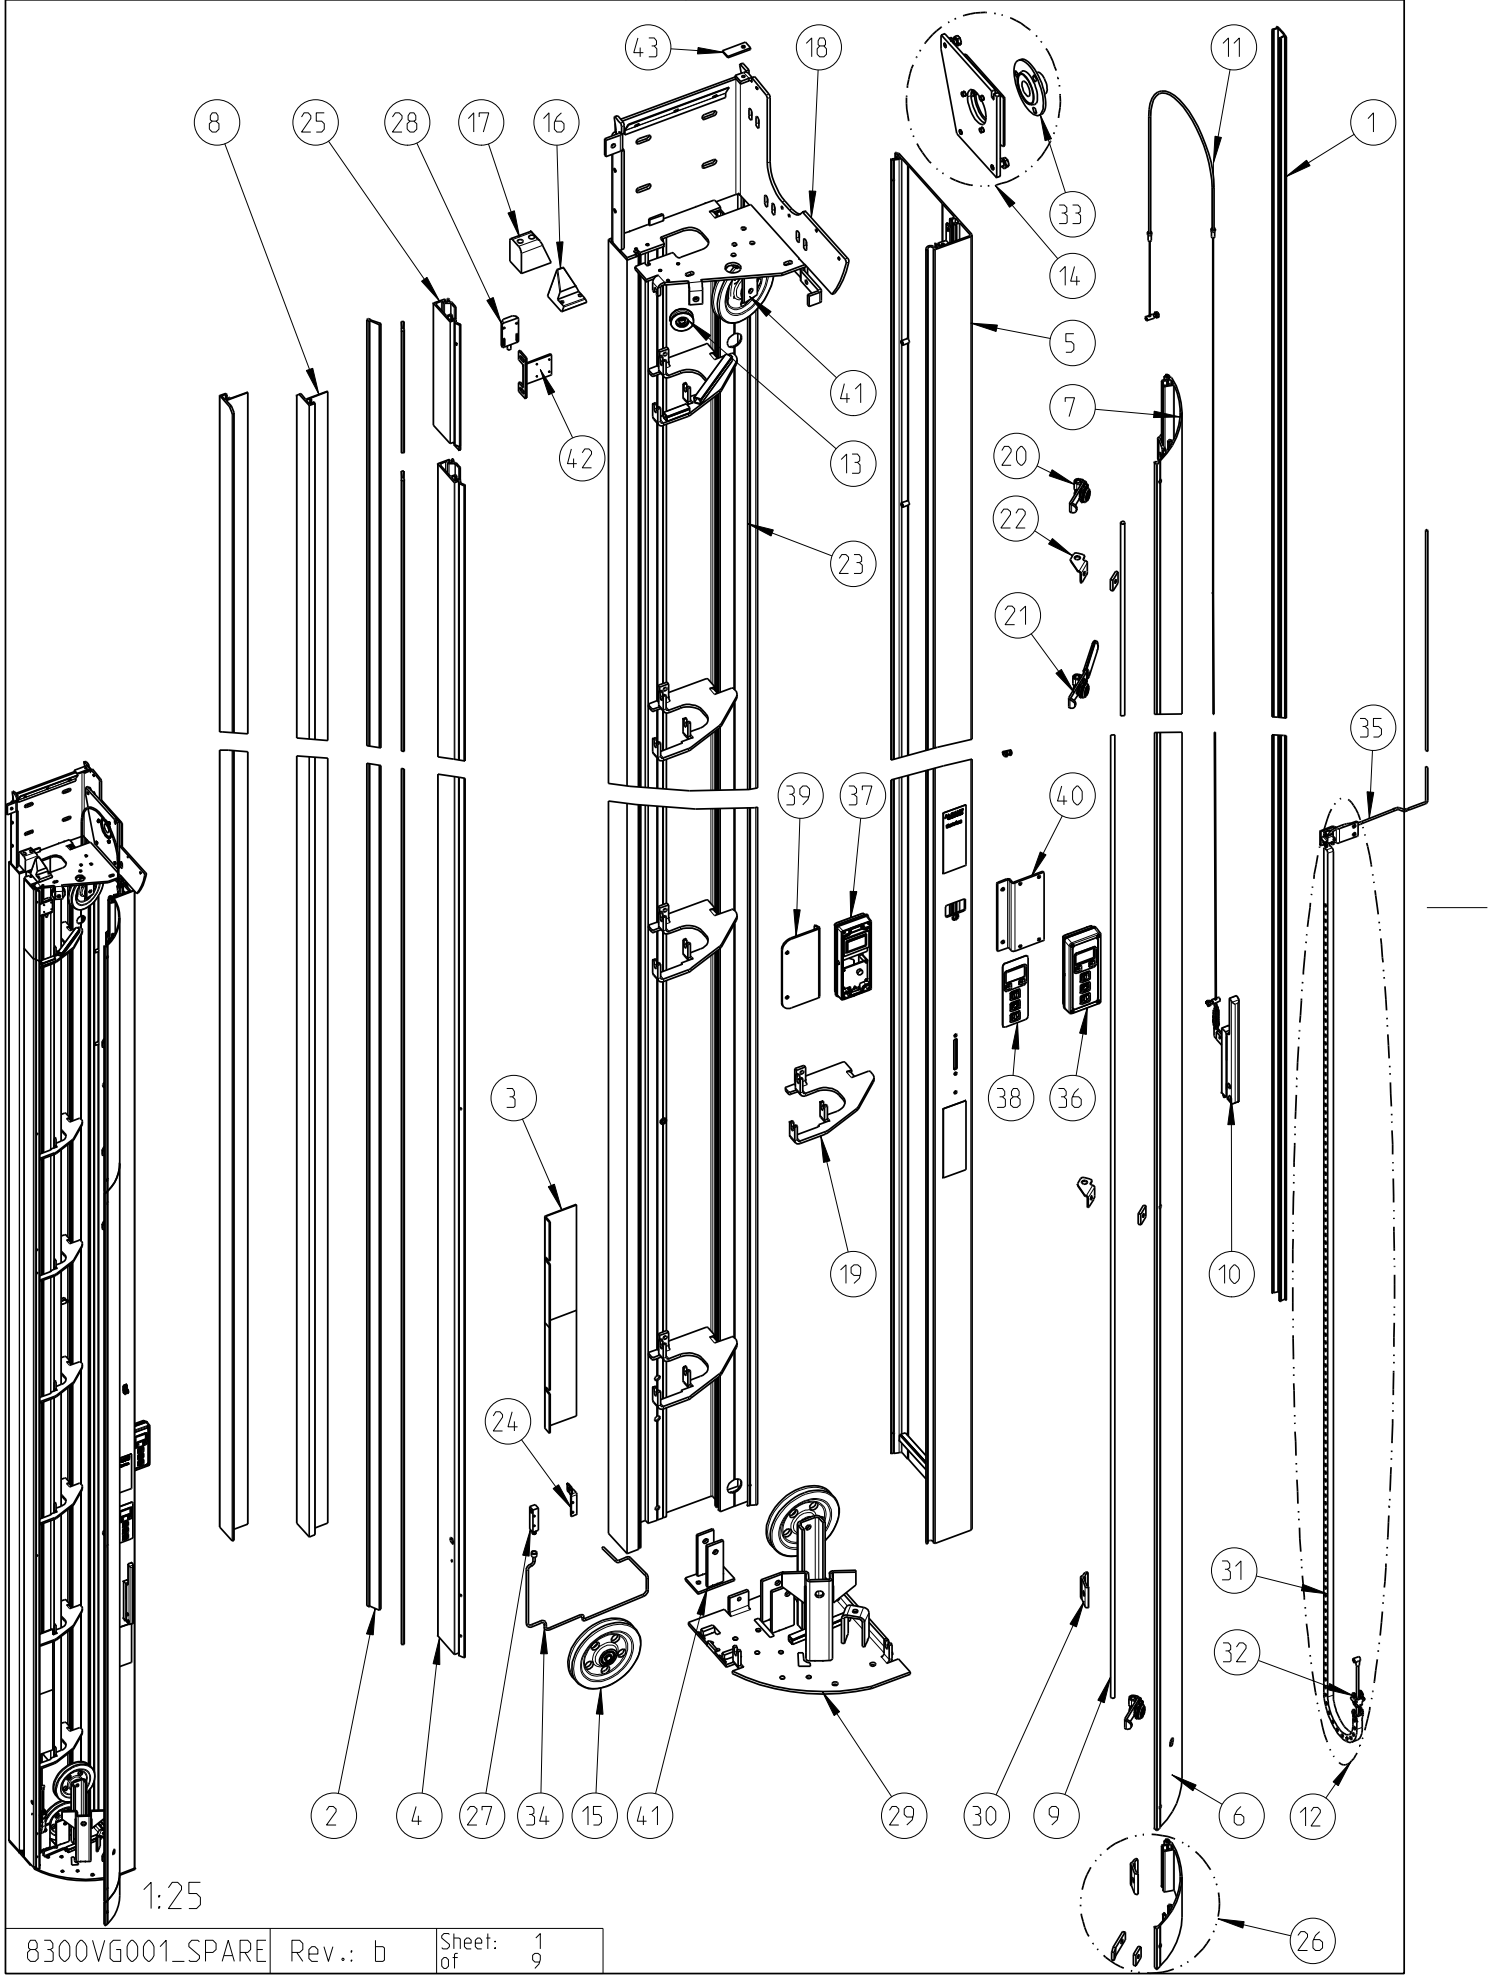


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ► gültig bis valid from ► valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
I	**Side frame right**								
	Side frame complete			D8520VG001	G	C	m	1	
1	Frame cover, grey or blue			D8520VG003	G	B	m	2	
2	Brush strip (front & back)	Option, only with safety edge		D8520VG004	G	B	m	0/2	x
3	Cover PC for cable chain, L=720mm	Windclass 1&2		D4101V0010		A	St./pc.	0/10	
	Cover PC for cable chain, L=520mm	Windclass 3		D4101V0009		A	St./pc.	0/10	
4	Side frame profile inner, right			D4721RG171	G	B	m	1	
5	Side frame profile side, break rel. right			D4721RG173	G	B	m	1	
6	Side frame profile door, lower, with/without lock, RH	► SO155058.1		D8520VG016	G	B	Stck./pc.	1	
	Side frame profile door, lower, with/without lock, RH	SO155149.1 ►		D8520VG017	G	B	Stck./pc.	1	
7	Side frame profile door, upper, with/without lock, RH	► SO155058.1		D8520VG018	G	B	m	1	
	Side frame profile door, upper, with/without lock, RH	SO155149.1 ►		D8520VG019	G	B	m	1	
8	Side frame profile wind reinfocement	2 pcs.		D8520VG011	G	B	m	0/2	
9	Lock bar 1.8 m			D4521V0302		A	Stck./pc.	0/2	
	Lock bar 2.3 m			D4521V0237		A	Stck./pc.	0-2	
	Lock bar 3.5 m			D4521V0238		A	Stck./pc.	0-2	
10	Emergency lever cpl, integrated			D8220R0056		B	Stck./pc.	0-1	
12	Cable chain, complete with cable and bracket			D8520VG013	G	B	m	0-1	
13	Pulley wheel for rope BBS			D5003R0008		A	Stck./pc.	0/2	
	Bracket for pulley with small wheel	► SO153614.1		D8420V0006		A	Stck./pc.	0/2	
14	Bearing bracket, complete, right			D8420V0007		A	Stck./pc.	1	
15	Cable pulley with bearings complete			D4121V0021		A	Stck./pc.	8-12	x
16	Bell mouth, front			D4121R0387		A	Stck./pc.	2	x
17	Bell mouth, back			D4121R0389		A	Stck./pc.	2	x
18	Wall bracket, right			D4521V0154		A	Stck./pc.	1	
19	Side frame stiffner, right			D4521V0155		A	Stck./pc.	2-9	
20	Complete lock	Option		D4521V0235		A	Stck./pc.	0-6	
21	Complete lock with handle	Option		D4521V0236		A	Stck./pc.	0/2	
22	Steering, lock bar	Option		D8420V0010		A	Stck./pc.	0-6	
23	Wall profile incl. sealing foam, right			D8520VG014	G	B	m	1	
24	Photocell bracket			D4521V0298		A	Stck./pc.	2	
25	Side frame profile inner, L=300 with bracket			D8420V0011		B	Stck./pc.	2	
26	Side frame profile door, L=100-150 with lock	► SO155058.1		D8220RG283		B	Stck./pc.	2	
	Side frame profile door, L=100 with lock	SO155149.1 ►		D8420V0012		B	Stck./pc.	2	
27	Photocell transmitter without bracket - blue	RH		D4904R0547		A	Stck./pc.	1	
28	Proximity switch, reference			D4905R0082		A	Stck./pc.	1	
	Cable for proximity switch / Stromag	L=2 m		D4907R0044		A	Stck./pc.	1	
29	Bottom fixation, right			D4521V0150		A	Stck./pc.	1	
30	Hinge profile, L=50			D4721R0228		A	Stck./pc.	6-10	
33	Bearing diameter 30			D8140R0071		A	Stck./pc.	2	
34	Cable for photocell 8m 3x0.25 M8			D4907R0030		A	Stck./pc.	1	
	Cable for photocell 14m 3x0.25 M8			D4907R0031		A	Stck./pc.	1	
	Cable for photocell 16m 3x0.25 M8			D4907R0037		A	Stck./pc.	1	
35	Cable for cable chain 8m 3x0.25 M8			D4907R0030		A	Stck./pc.	0-1	
36	Display unit comlete, MCC display	wall / vägg		D8820R0032		A	Stck./pc.	0/1	
37	Box with circuit card & gasket, MCC display	integrated		D8820R0031		A	Stck./pc.	0/1	
38	Foilkey, MCC display	integrated		D4905V0056		A	Stck./pc.	0/1	
39	Bracket display box MCC	integrated		D4521V0157		A	Stck./pc.	0/1	
40	Bracket display box wall MCC	wall / vägg		D4521V0242		A	Stck./pc.	0/1	
41	Wheel bracket	SRD = +1		D4521V0159		A	Stck./pc.	1/2	
42	Bracket proximity switch			D4521V0261		A	Stck./pc.	1	
43	Lock for motor cover			D4521V0254		A	Stck./pc.	0/1	
44	Release angle			D4521V0191		A	Stck./pc.	1	

Frame (right)	
Karm (höger)	
Seitenteil (rechts)	
Montant latéral droit	

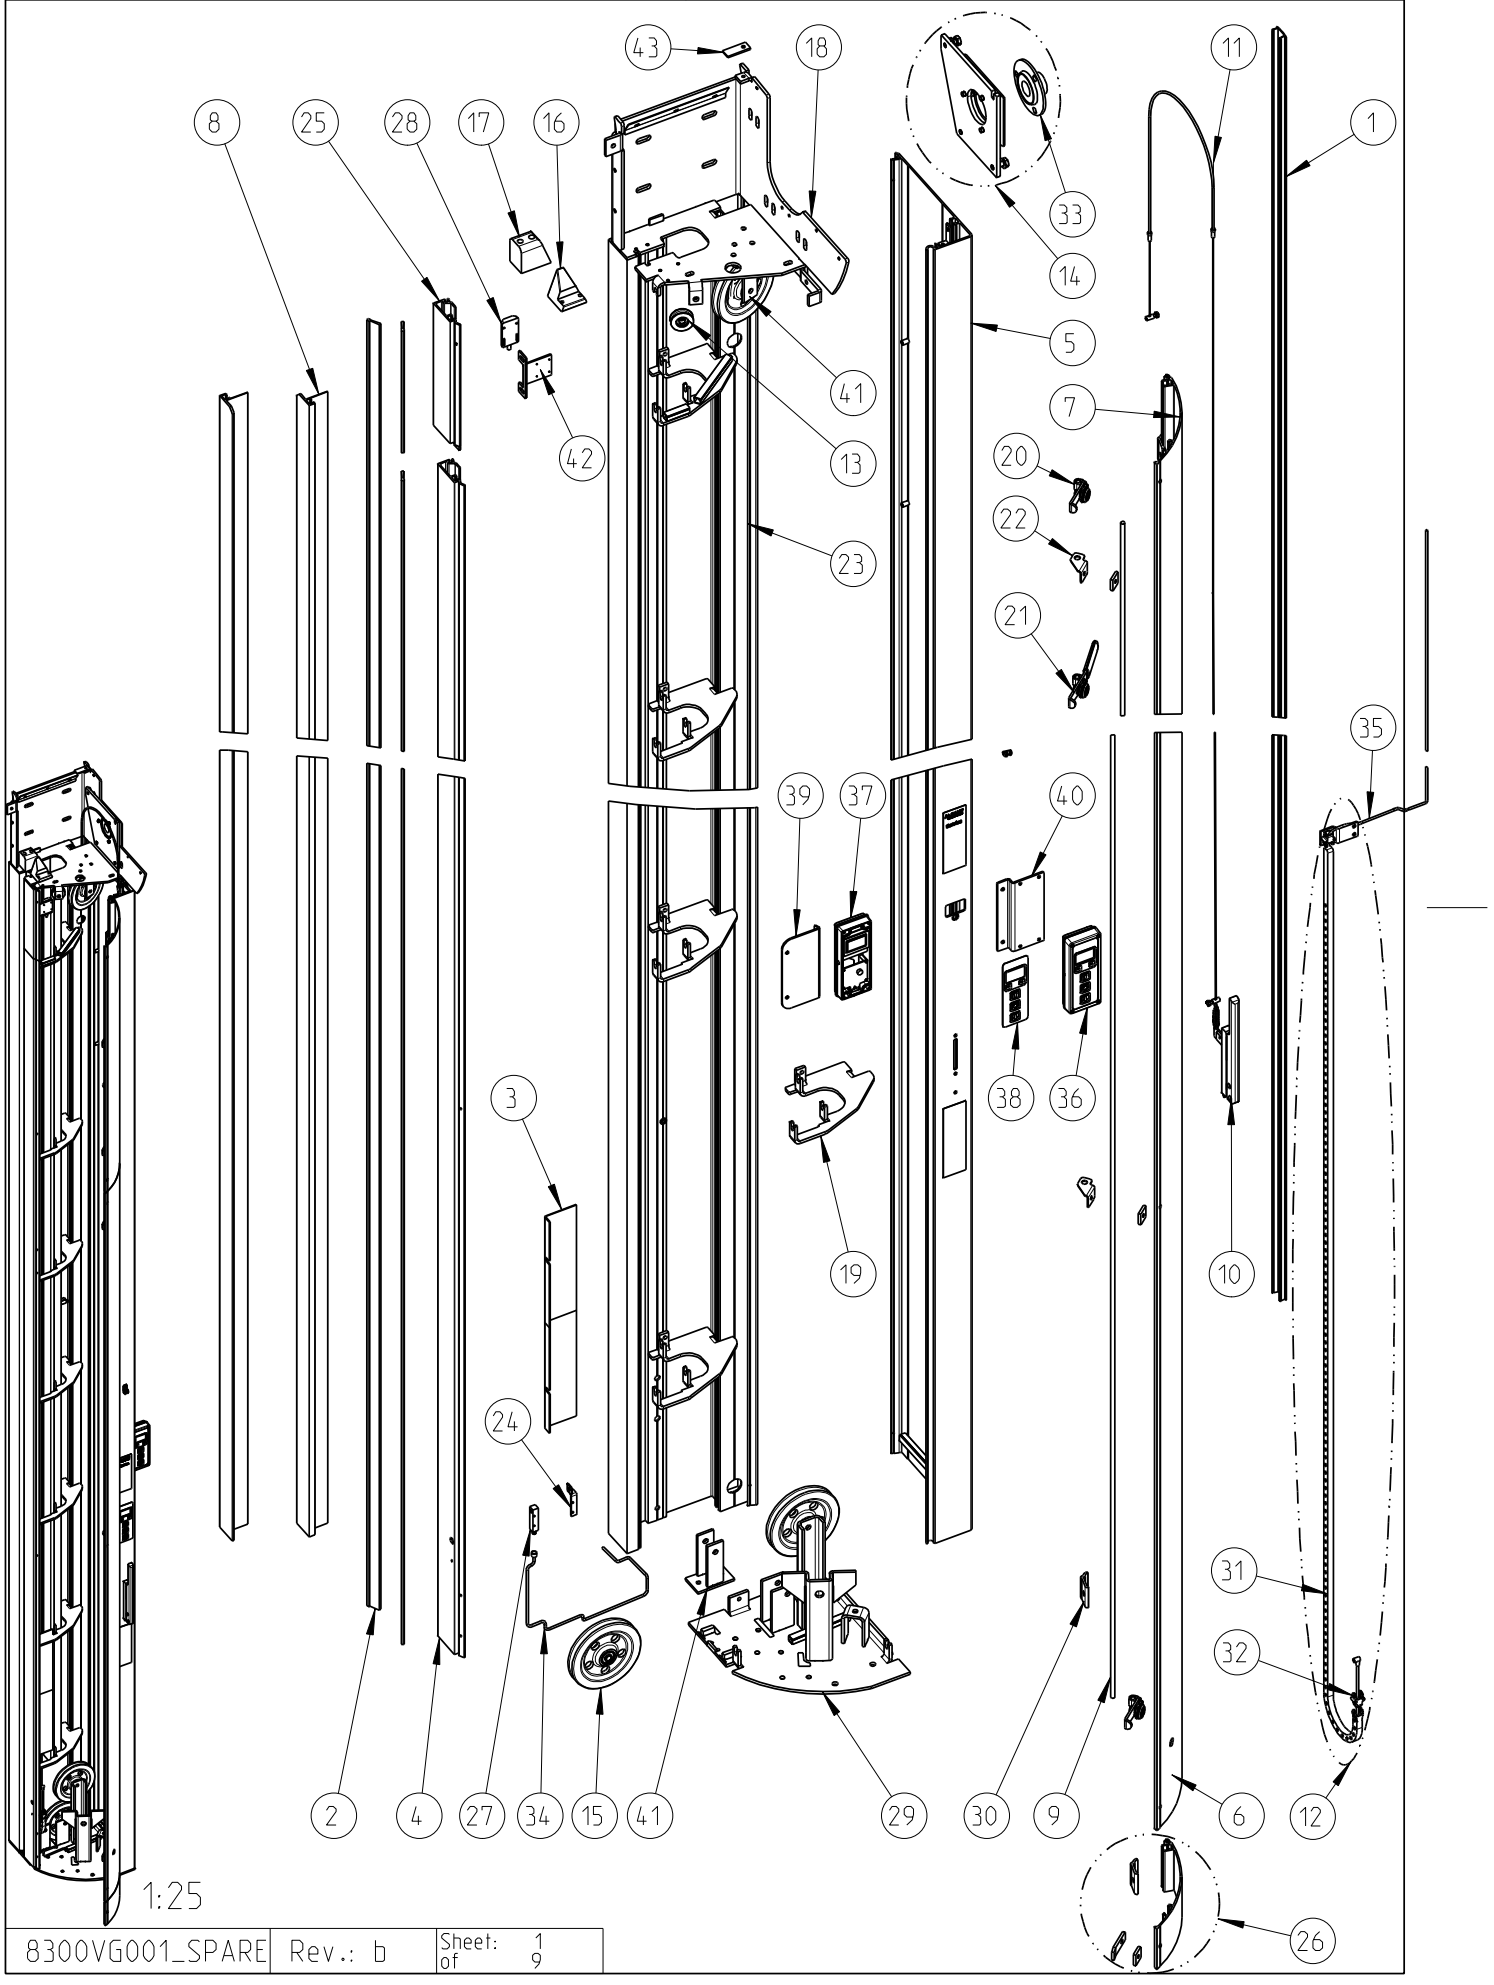



ALBANY
ASSA ABLOY


RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ► gültig bis valid from ► valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
II	**Side frame left** **(see drawing side frame right)**								
	Side frame complete			D8520VG002	G	C		1	
1	Frame cover, grey or blue			D8520VG003	G	B	m	2	
2	Brush strip (front & back)	Option, only with safety edge		D8520VG004	G	B	m	2/4	x
3	Cover PC for cable chain, L=720mm	Windclass 1&2		D4101V0010		A	St./pc.	0/10	
	Cover PC for cable chain, L=520mm	Windclass 3		D4101V0009		A	St./pc.	0/10	
4	Side frame profile inner, left			D4721RG172	G	B	m	1	
5	Side frame profile side, break rel. left			D4721RG174	G	B	m	1	
6	Side frame profile door, lower, with or without lock, LH	► SO155058.1		D8520VG020	G	B	St./pc.	1	
	Side frame profile door, lower, with or without lock, LH	SO155149.1 ►		D8520VG021	G	B	St./pc.	1	
7	Side frame profile door, upper, with or without lock, LH	► SO155058.1		D8520VG022	G	B	m	1	
	Side frame profile door, upper, with or without lock, LH	SO155149.1 ►		D8520VG023	G	B	m	1	
8	Side frame profile wind reinfocement	2 pcs.		D8520VG011	G	B	m	0/2	
9	Lock bar 1.8 m			D4521V0302		A	Stck./pc.	0/2	
	Lock bar 2.3 m			D4521V0237		A	Stck./pc.	0-2	
	Lock bar 3.5 m			D4521V0238		A	Stck./pc.	0-2	
10	Emergency lever cpl, integrated			D8220R0056		B	Stck./pc.	0-1	
12	Cable chain, complete with cable and bracket			D8520VG013	G	B	Stck./pc.	0-1	
13	Pulley wheel for rope BBS			D5003R0008		A	Stck./pc.	0/2	
	Bracket for pulley with small wheel	► SO153614.1		D8420V0006		A	Stck./pc.	0/2	
14	Bearing bracket, complete, left			D8420V0008		A	Stck./pc.	1	
15	Cable pulley with bearings complete			D4121V0021		A	Stck./pc.	8-12	x
16	Bell mouth, front			D4121R0388		A	Stck./pc.	2	x
17	Bell mouth, back			D4121R0390		A	Stck./pc.	2	x
18	Wall bracket, left			D4521V0187		A	Stck./pc.	1	
19	Side frame stiffner, left			D4521V0188		A	Stck./pc.	2-9	
20	Complete lock	Option		D4521V0235		A	Stck./pc.	0-6	
21	Complete lock with handle	Option		D4521V0236		A	Stck./pc.	0/2	
22	Steering, lock bar	Option		D8420V0010		A	Stck./pc.	0-6	
23	Wall profile incl. sealing foam, left			D8520VG015	G	B	m	1	
24	Photocell bracket			D4521V0298		A	Stck./pc.	2	
25	Side frame profile inner, L=300 with bracket			D8420V0011		B	Stck./pc.	2	
26	Side frame profile door, L=100-150 with lock	► SO155058.1		D8220RG283		B	Stck./pc.	2	
	Side frame profile door, L=100 with lock	SO155149.1 ►		D8420V0012		B	Stck./pc.	2	
27	Photocell receiver without bracket - black	LH		D4904R0548		A	Stck./pc.	1	
28	Proximity switch, reference			D4905R0082		A	Stck./pc.	1	
	Cable for proximity switch / Stromag	L=2 m		D4907R0044		A	Stck./pc.	1	
29	Bottom fixation, left			D4521V0151		A	Stck./pc.	1	
30	Hinge profile, L=50			D4721R0228		A	Stck./pc.	6-10	
33	Bearing diameter 30			D8140R0071		A	Stck./pc.	2	
34	Cable for photocell 8m 3x0.25 M8			D4907R0030		A	Stck./pc.	1	
	Cable for photocell 14m 3x0.25 M8			D4907R0031		A	Stck./pc.	1	
	Cable for photocell 16m 3x0.25 M8			D4907R0037		A	Stck./pc.	1	
35	Cable for cable chain 8m 3x0.25 M8			D4907R0030		A	Stck./pc.	0-1	
36	Display unit comlete, MCC display	wall / vägg		D8820R0032		A	Stck./pc.	0/1	
37	Box with circuit card & gasket, MCC display	integrated		D8820R0031		A	Stck./pc.	0/1	
38	Membrane, MCC display	integrated		D4905V0056		A	Stck./pc.	0/1	
39	Bracket display box MCC	integrated		D4521V0157		A	Stck./pc.	0/1	
40	Bracket display box wall MCC	wall / vägg		D4521V0242		A	Stck./pc.	0/1	
41	Wheel bracket	SRD = +1		D4521V0159		A	Stck./pc.	1/2	
42	Bracket proximity switch			D4521V0261		A	Stck./pc.	1	
43	Lock for motor cover			D4521V0254		A	Stck./pc.	0/1	
44	Release angle			D4521V0191		A	Stck./pc.	1	

Top Roll 139.7 & 193.7	
Valsrör 139.7 & 193.7	
Wickelwelle 139.7 /193.7	
Tube enrouler 139.7 /193.7	

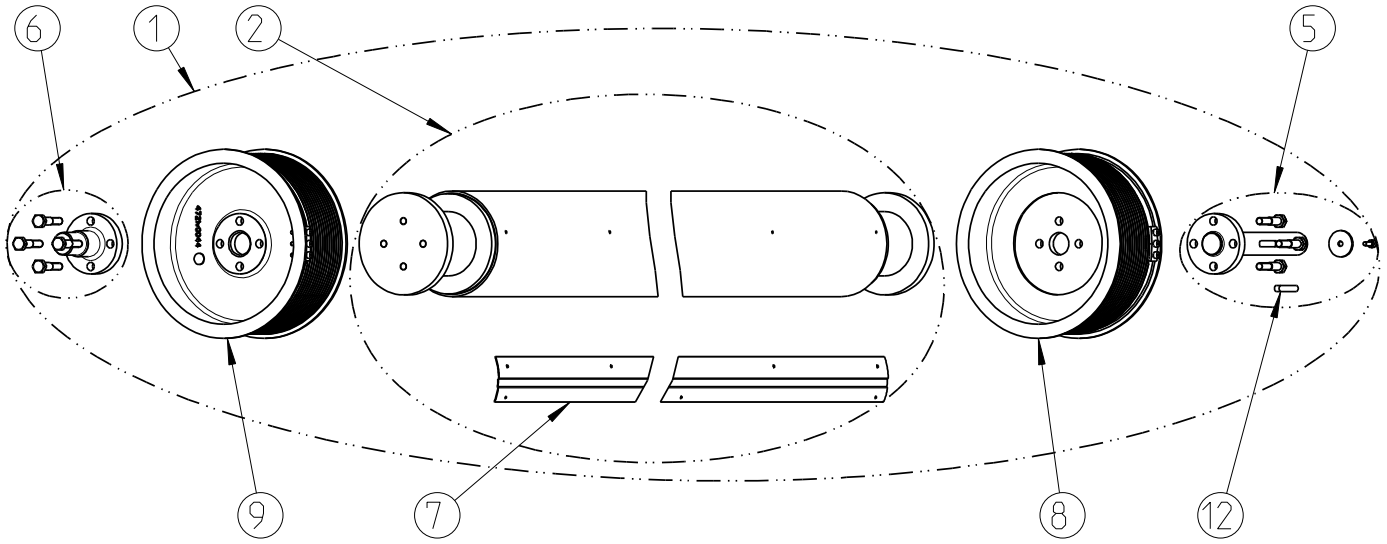

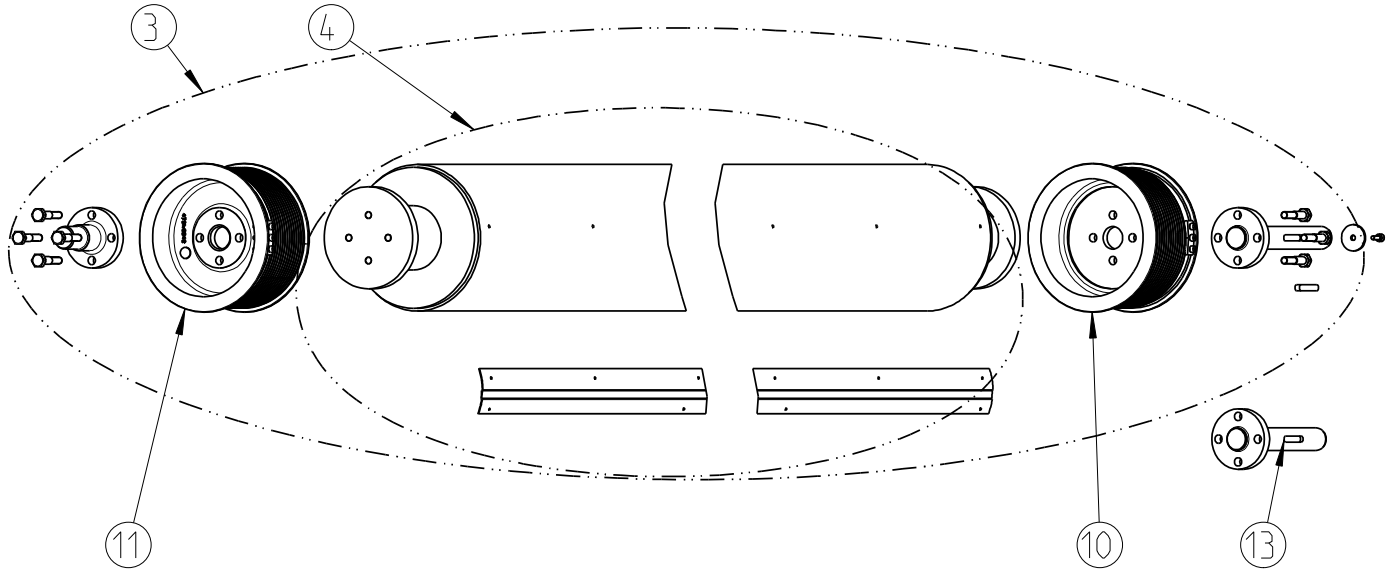

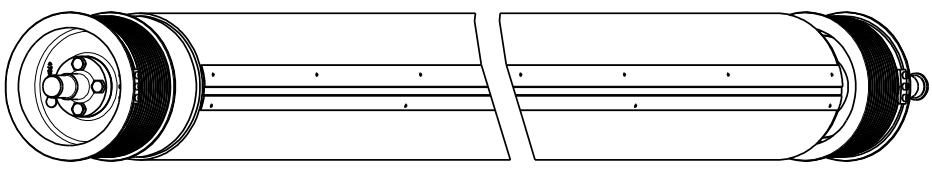


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
III	**Top roll**								
1	Top roll complete Ø139.7	with cable drums System A+B	Baseprice	D8240RG122	G	D	Stck./pc.	1	
			Upcharge				m		
2	Top roll Ø139.7	without cable drums Syst. A+B	Baseprice	D8240RG123	G	D	Stck./pc.	1	
			Upcharge				m		
3	Top roll complete Ø193.7	with cable drums System A+B	Baseprice	D8240RG122	G	D	Stck./pc.	1	
			Upcharge				m		
4	Top roll Ø193.7	without cable drums Syst. A+B	Baseprice	D8240RG123	G	D	Stck./pc.	1	
			Upcharge				m		
5	Stub axle, drive side, with screws and key			D8440V0001		A	Stck./pc.	1	
6	Stub axle, non drive side with screws			D8440V0002		A	Stck./pc.	1	
7	Fixing strip			D8540VG005	G	B	m	1	
8	Cable drum dia. 238, right			D4721V0043		A	Stck./pc.	1	
9	Cable drum dia. 238, left			D4721V0044		A	Stck./pc.	1	
10	Cable drum dia. 185, right			D4721V0041		A	Stck./pc.	1	
11	Cable drum dia. 185, left			D4721V0042		A	Stck./pc.	1	
12	Key 8x7x50			D5409R0018		A	Stck./pc.	1	
13	Stub axle, drive side, with screws and key , SRD			D8440V0003		A	Stck./pc.	1	

Doorblade	
Portblad	
Torbehang	
Toile	

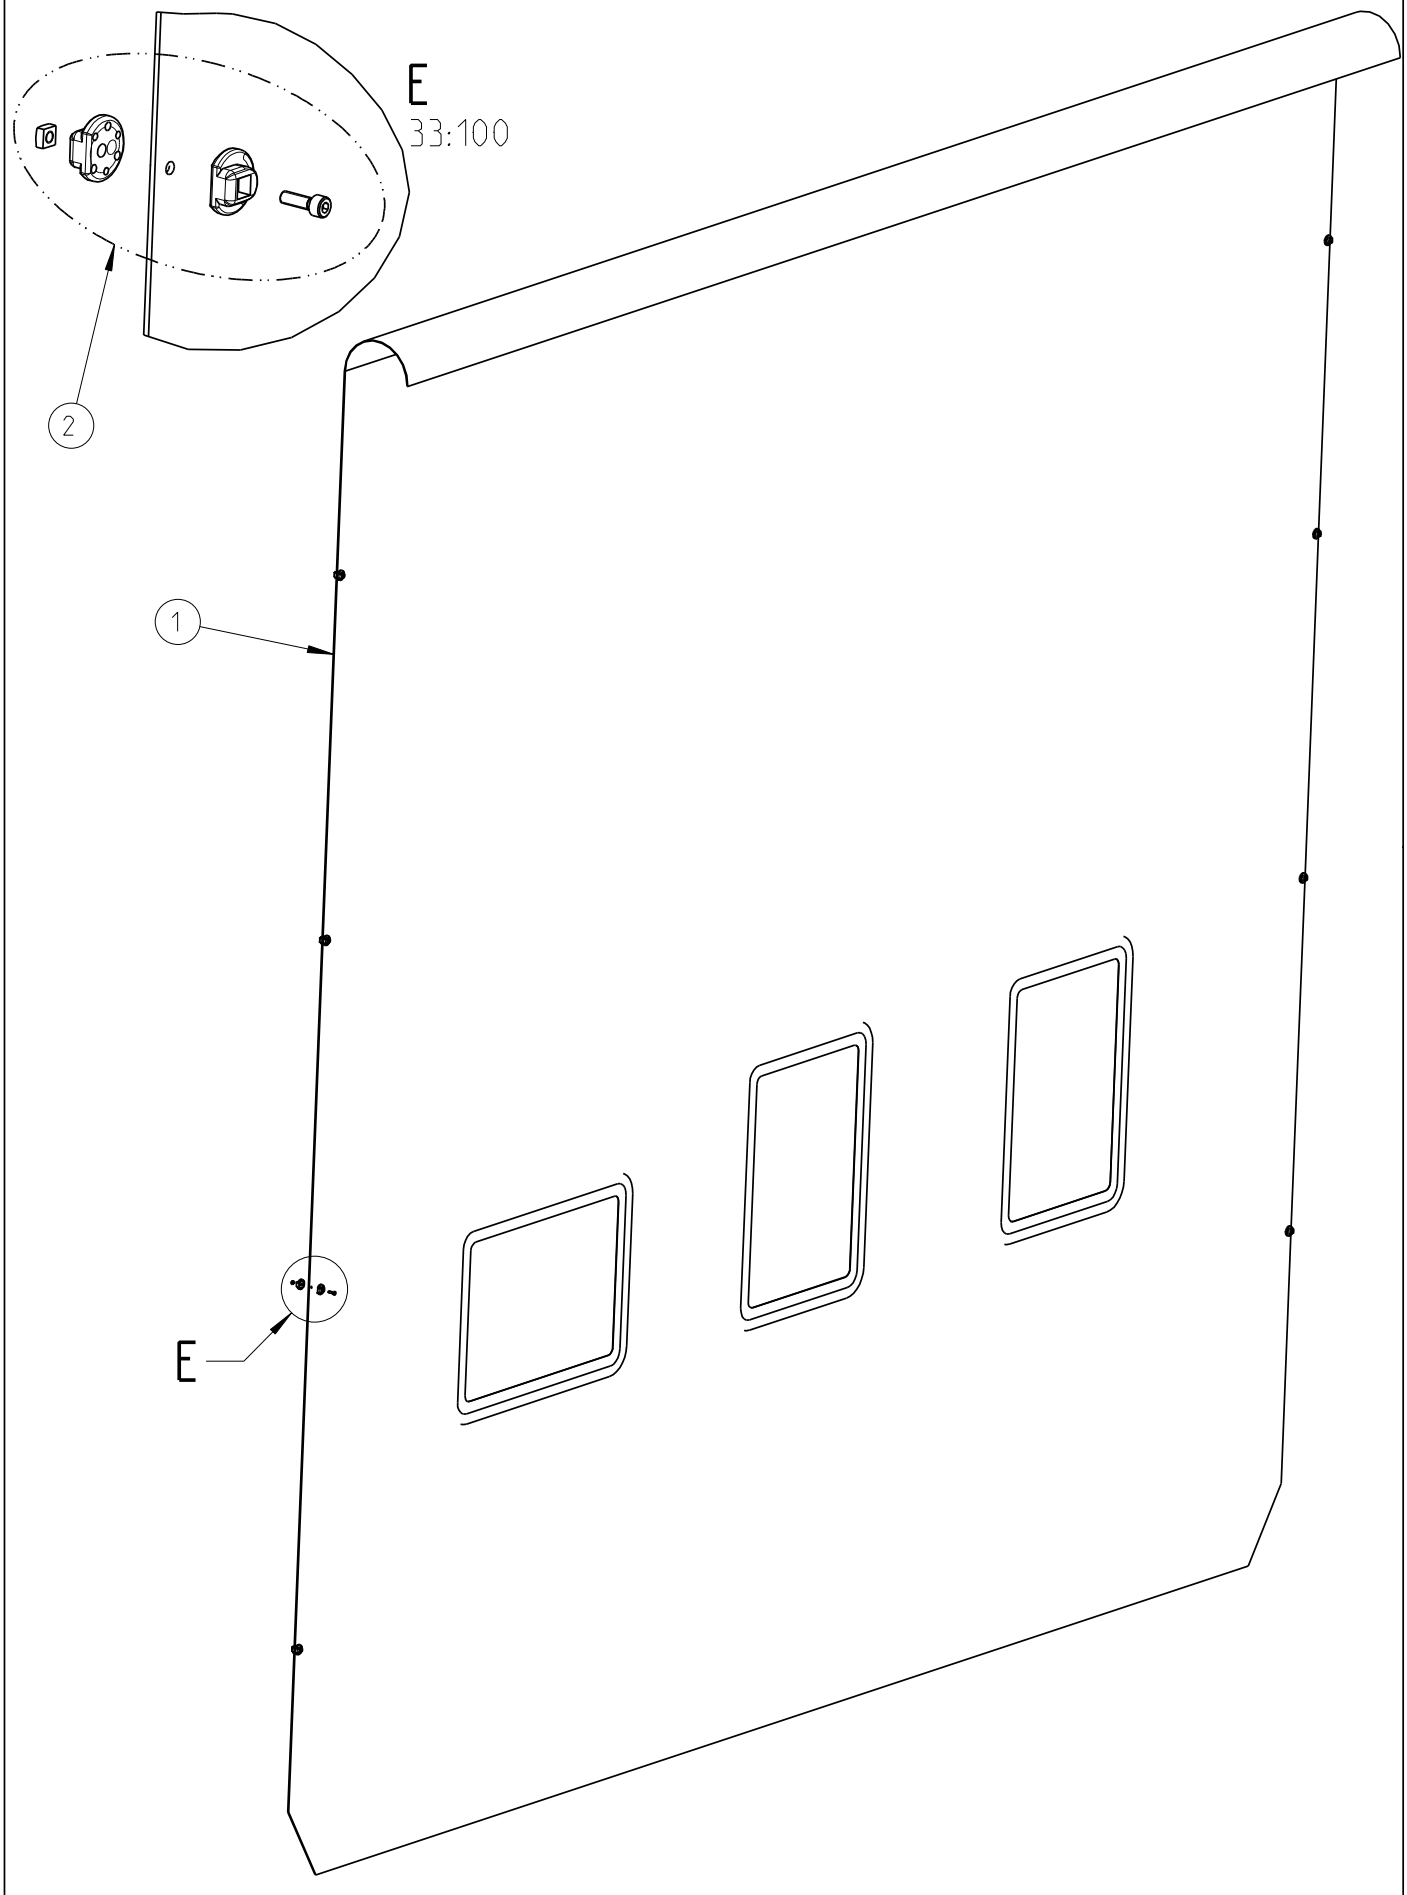



ALBANY
ASSA ABLOY


RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
IV	**Doorblade**								
1	Door blade PVC with stripes blue / red		blue / red	D8230RG325	G	C	m²	1	
	Door blade			D8230RG334	G			1	
	Rolltex Plus					C	m²	1	
	Nomatex					D	m²	1	
	Window vertical/horizontal					C	Stck./pc.	1	
	Vision area for doorblade Nomatex					C	m/dw	1	
2	Set windbreaktaps (12 pcs)			D8130R0009		A	Satz/Set	max 2	x

Bottom profile with safety edge, cable chain	
Bottenbalk med klämskydd, kabelkedja	
Abschlussprofil mit kontaktleiste, kabelhette	
Bas de Porte avec sécurité et chaine porte-câble	

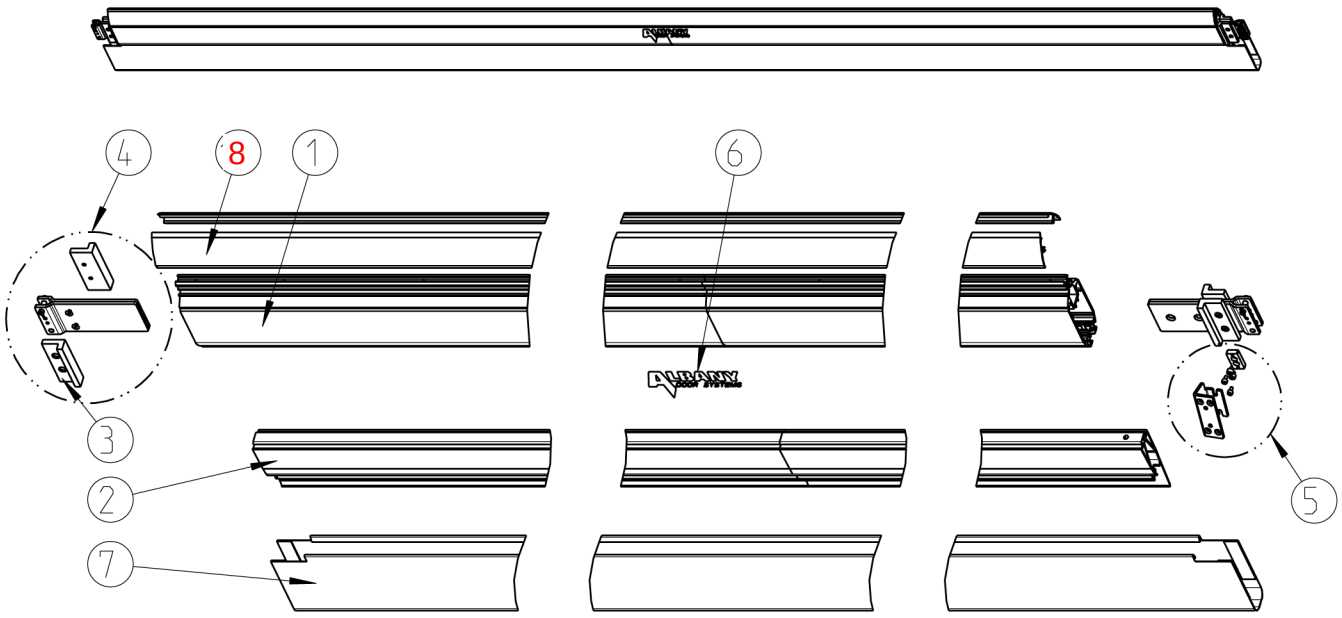

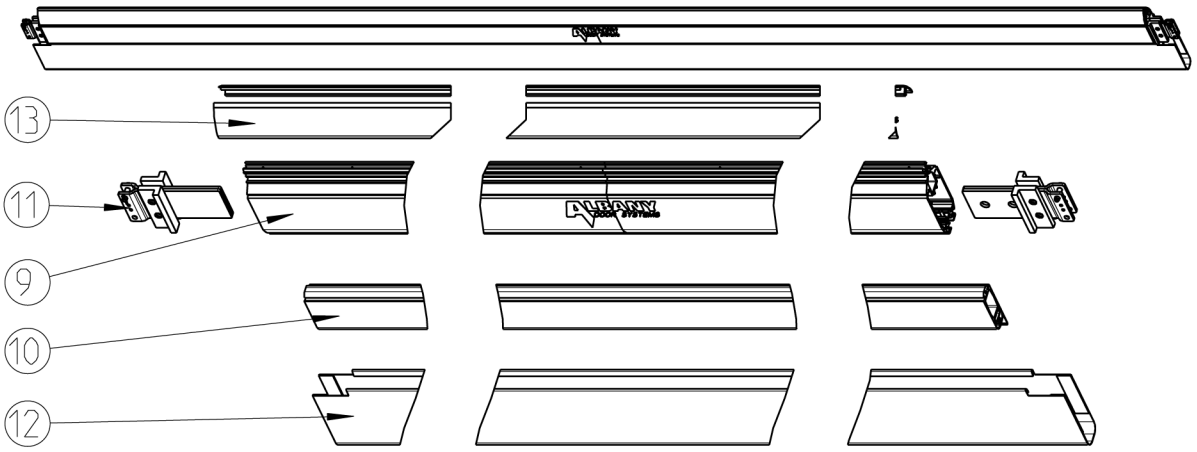

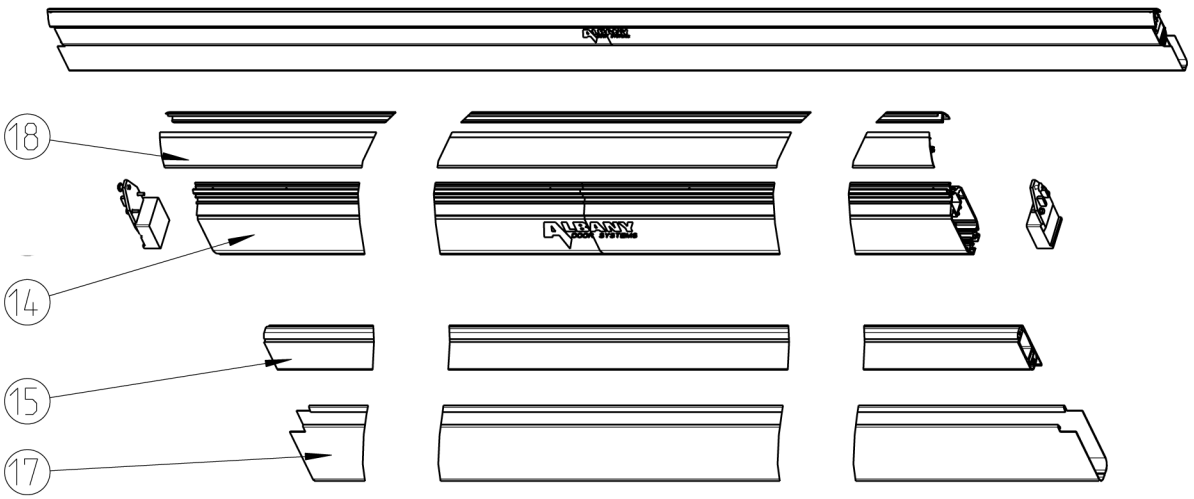


ALBANY
ASSA ABLOY

RR 600, Version 25


Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
V	**Bottom profile**								
	Bottom profile complete	Base price	Coil cable, cable chain	D8550VG013	G	B	Stck./pc.	1	
		Upcharge					m		
	Additional kit for doors at first bottom beam change	► SO152528.1		D8550VG051	G	B	Stck./pc.		
1	Bottom profile pre-drilled			D4721RG168	G	B	m	1	
2	Rubber profile with integrated safety edge	With SRD		D4421RG036	G	B	m	1	
	Rubber profile with integrated safety edge	Without SRD, sealed to side frame		D8550RG073	G	B	m	1	
4	End guide plate, complete			D8150R0079		A	Stck./pc.	2	
5	Reference plate with bracket and screws	drive side		D8450V0007		A	Stck./pc.	0/1	
6	Decal Albany Door 180x70			D6403V0002		A	Stck./pc.	2	
7	Sealing bottom profile yellow			D8550VG034	G	B	m	0-1	
8	Plastic cover for bottom beam	2 pcs. / unit		D8550VG035	G	B	m	1	
	Bottom profile complete for pre-running photo cell	Base price	pre-running photo cell	D8550VG023	G	B	Stck./pc.	1	
		Upcharge					m		
9	Bottom profile pre-drilled			D4721RG168	G	B	m	1	
10	Rubber profile cut-to-size			D8550VG038	G	B	m		
11	End guide plate, complete			D8150R0079		A	Stck./pc.	2	
12	Sealing bottom profile yellow			D8550VG034	G	B	m	0-1	
13	Plastic cover for bottom beam	2 pcs. / unit		D8550VG035	G	B	m	1	
	Bottom profile complete for break-away w pre-running photocell	Base price	Crash, pre-running	D8550VG021	G	B	Stck./pc.	1	
		Upcharge					m		
14	Bottom profile pre-drilled			D4721RG168	G	B	m	1	
15	Rubber profile cut-to-size			D8550VG038	G	B	m		
17	Sealing bottom profile yellow			D8550VG034	G	B	m	0-1	
18	Plastic cover for bottom beam	2 pcs. / unit		D8550VG035	G	B	m	1	
19	Retrofit RR600 Crash holder without Steel cable	break-away; see VII/13 steel cables	► 2010-10	D8150R0109		A	Stck./pc.	1	

Bottom profile with safety edge, coily cable	
Bottenbalk med klämskydd, spiralkabel	
Abschlussprofil mit kontaktleiste, spiralkabel	
Bas de Porte avec sécurité et câble spiral	

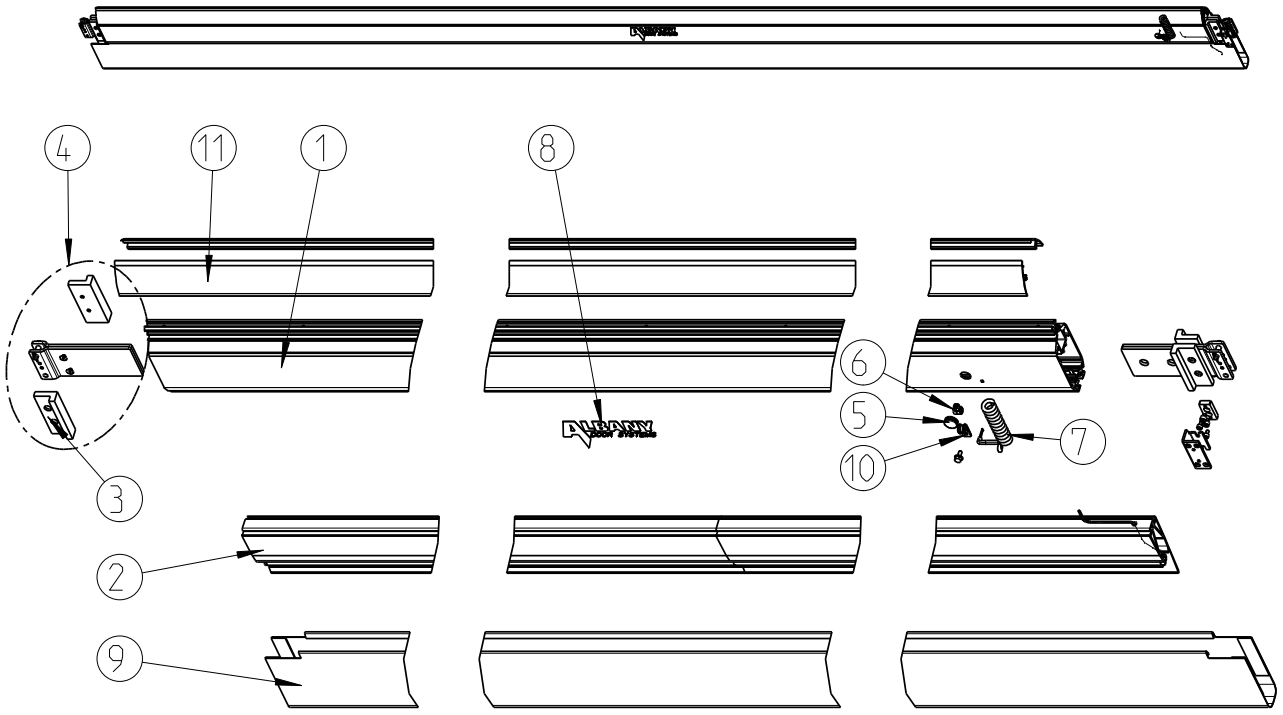



SCALE 1:25

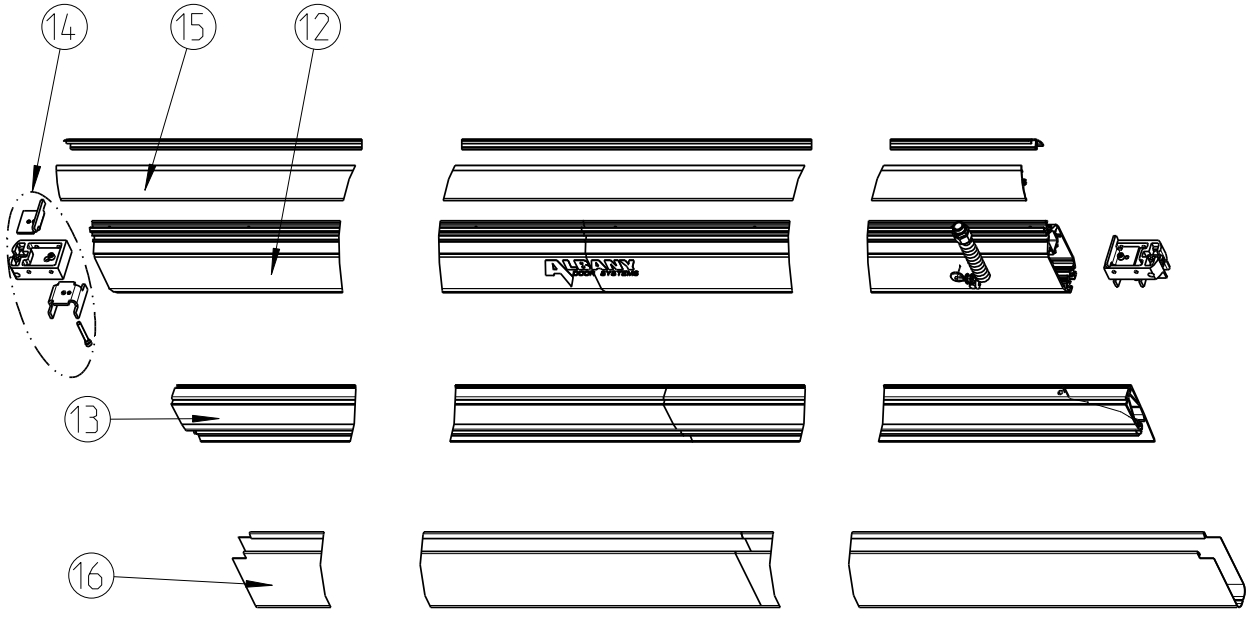


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
VI	**Bottom profile**								
	Bottom profile complete	Base price	For coil cable	D8550VG013	G	B	Stck./pc.	1	
		Upcharge					m		
	Reference sensor bracket RR 600, Additional for doors at first bottom beam change	► SO152528.1		D4521V0261		A	Stck./pc.	1	
1	Bottom profile pre-drilled			D4721RG168	G	B	m	1	
2	Rubber profile with integrated safety edge	sealed to side frame		D8550RG073	G	B	m	1	
4	End guide plate, complete			D8150R0079		A	Stck./pc.	2	
5	Rubber bushing d=13.5			D4421V0007		A	Stck./pc.	1	
6	Connection 3M UR2			D4910V0013		A	Stck./pc.	0-2	
7	Coil cable 5x0,5, black			D4907R0038		A	Stck./pc.	1	x
8	Decal Albany Door 180x70			D6403V0002		A	Stck./pc.	2	
9	Sealing bottom profile yellow			D8550VG034	G	B	m	0-1	
10	Bracket for coily cable			D5006R0010		A	Stck./pc.	0-2	
11	Plastic cover for bottom beam	2 pcs. / unit		D8550VG035	G	B	m	1	
	Bottom profile SRD complete with coily cable	Base price		D8550VG018	G	B	Stck./pc.	1	
		Upcharge					m		
12	Bottom profile pre-drilled			D4721RG168	G	B	m	1	
13	Rubber profile with integrated safety edge	sealed to side frame		D8550RG073	G	B	m	1	
14	Guiderail SRD, complete			D8450V0003		A	Stck./pc.	2	
15	Plastic cover for bottom beam	2 pcs. / unit		D8550VG035	G	B	m	1	
16	Sealing bottom profile yellow			D8550VG034	G	B	m	0-1	

Balancing system, BBS, Control Box	
Balanseringsystem, BBS, Styrsystem	
Gewichtausgleich, BBS, Steurung	
Système d'équilibrage. BBS. Armoire de commande	

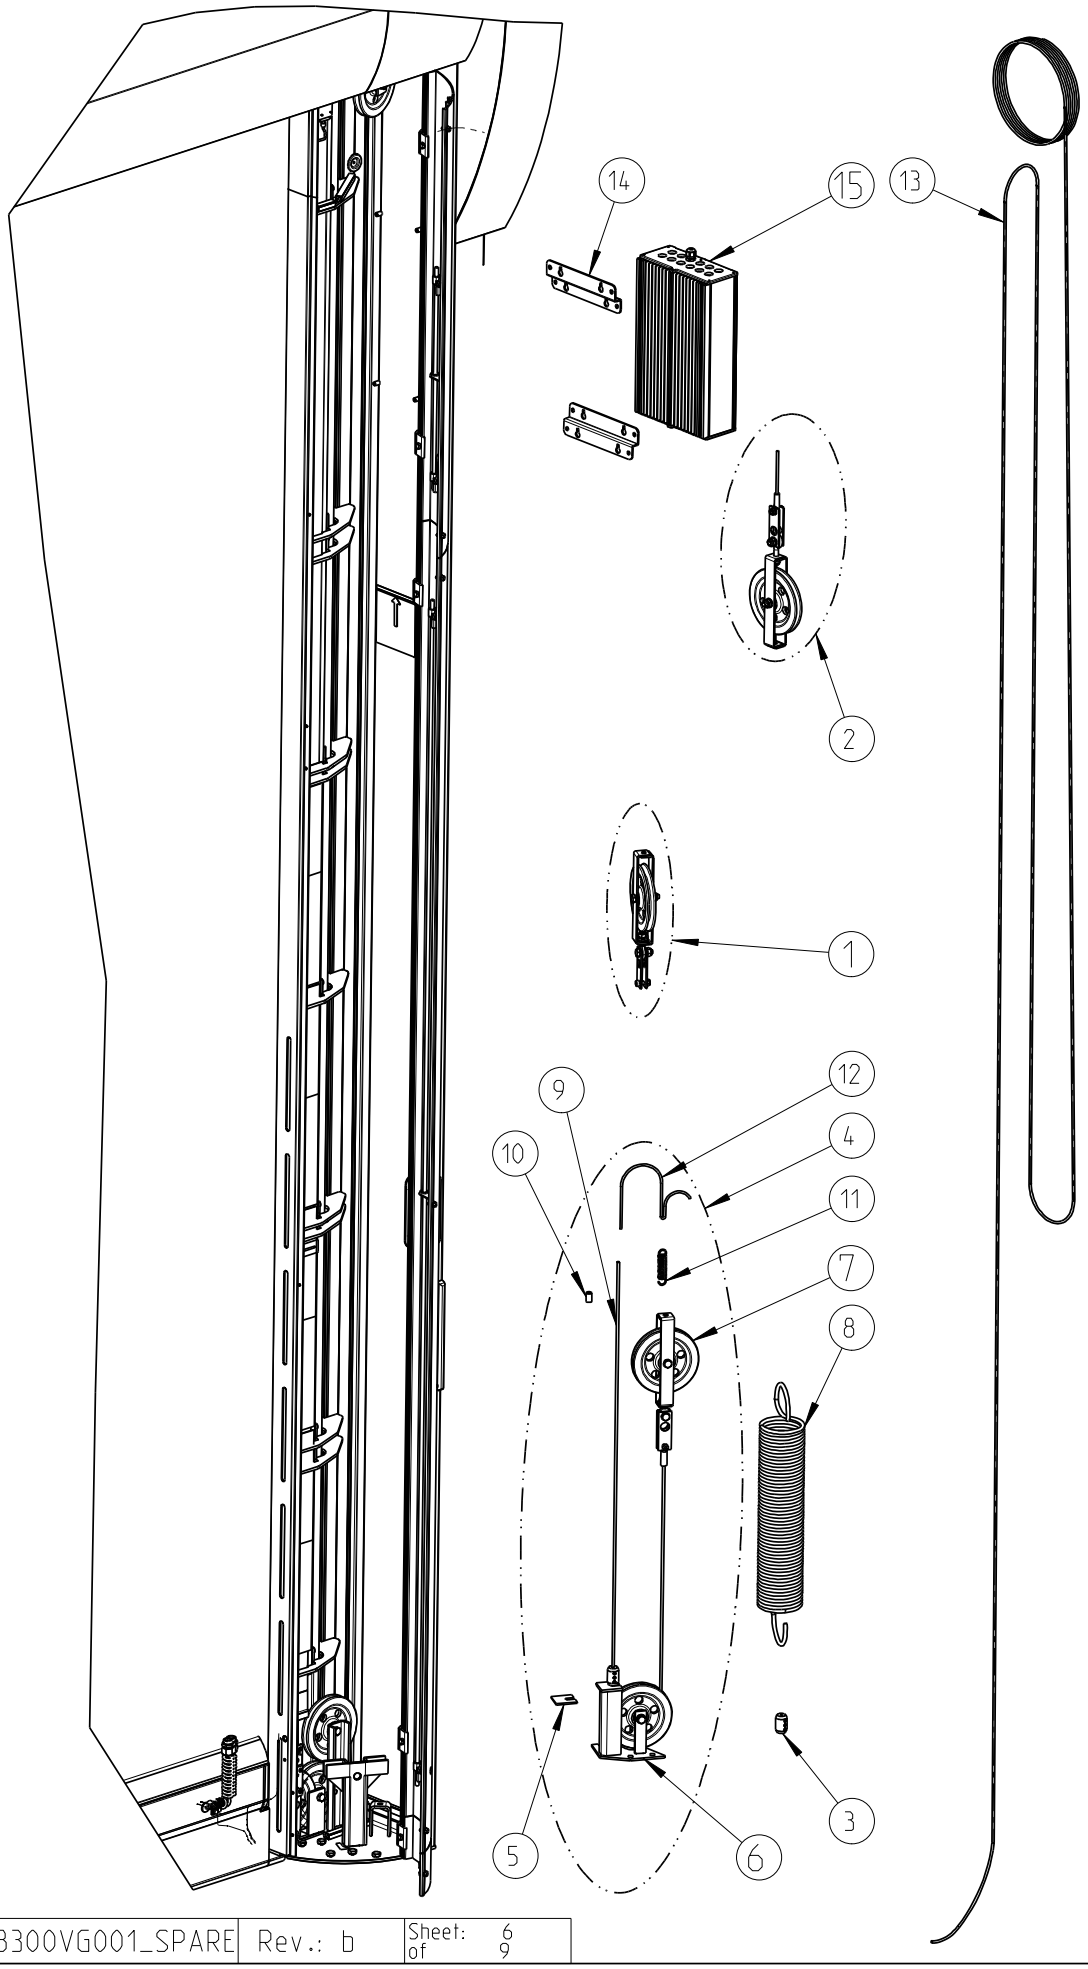


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
VII	**Balancing sys., BBS, Control Box**								
1	Cable pulley complete, bearing			D8120R0073		A	Stck./pc.	2	x
2	Cable pulley complete, reduction pulley	System B; without rope		D8170V0003		B	Stck./pc.	0/2	x
3	Cable lock round with screws			D8420V0003		A	Stck./pc.	0/2/4	
4	Cable pulley with bottom beam stopper, right	BBS system		D8520VG009	G	B	Stck./pc.	0-1	
	Cable pulley with bottom beam stopper, left	BBS system		D8520VG010	G	B	Stck./pc.	0-1	
5	Rubber, bottom beam stop	BBS system		D4421V0009		A	Stck./pc.	0/2	x
6	Bottom beam stop without spring, right	BBS system		D4521V0153		A	Stck./pc.	0-1	
	Bottom beam stop without spring, left	BBS system		D4521V0163		A	Stck./pc.	0-1	
7	Cable pulley with bearings complete			D4121V0021		A	Stck./pc.	8-12	x
8	Spring A, L=625 mm			D4802V0007		A	Stck./pc.	2	
	Spring B, L=631 mm			D4802V0008		A	Stck./pc.	2	
	Spring C, L=846 mm			D4802V0009		A	Stck./pc.	2	
	Spring D, L=811 mm			D4802V0010		A	Stck./pc.	2	
	Spring E, L=1081 mm			D4802V0011		A	Stck./pc.	2	
	Spring M, L=1105 mm			D4802V0012		A	Stck./pc.	2	
	Spring N, L=1510 mm			D4802V0013		A	Stck./pc.	2	
9	Steel cable 4,5 m	BBS system; DH ≤ 4500		D5105R0071		A	Stck./pc.	0/2	x
	Steel cable 7,5 m	BBS system; DH > 4500.		D5105R0070		A	Stck./pc.	0/2	x
10	Cable lock 5 mm for steel cable	BBS system		D5005V0001		A	Stck./pc.	0/2	
11	Spring for BBS	BBS system		D4802V0014		A	Stck./pc.	0/2	
12	Robe, white 5 mm, L=14 m.	BBS system		D8420V0004		A	Stck./pc.	0/2	x
13	Steel cable 13m	See Page 14: Length of steel cables		D5105R0069		A	Stck./pc.	2/4	x
	Steel cable 16m			D5105V0006		A	Stck./pc.	2/4	x
	Steel cable 18m			D5105V0007		A	Stck./pc.	2	x
	Steel cable 22m			D5105V0009		A	Stck./pc.	2	x
	Steel cable 29m			D5105V0011		A	Stck./pc.	2	x
	Steel cable 10m	break-away; see Page 14: Length of steel cables	2008-06 ▶	D5105R0072		A	Stck./pc.	2	x
	Steel cable 15m		2008-06 ▶	D5105R0073		A	Stck./pc.	2	x
	Steel cable 23m		2008-06 ▶	D5105R0074		A	Stck./pc.	2	x
	Retrofit RR600 Crash holder without Steel cable		▶ 2010-10	D8150R0109					
15	MCC Control box	see MCC-spare part list						1	

Drive unit	
Drivenhet	
Antrieb	
Motorisation	

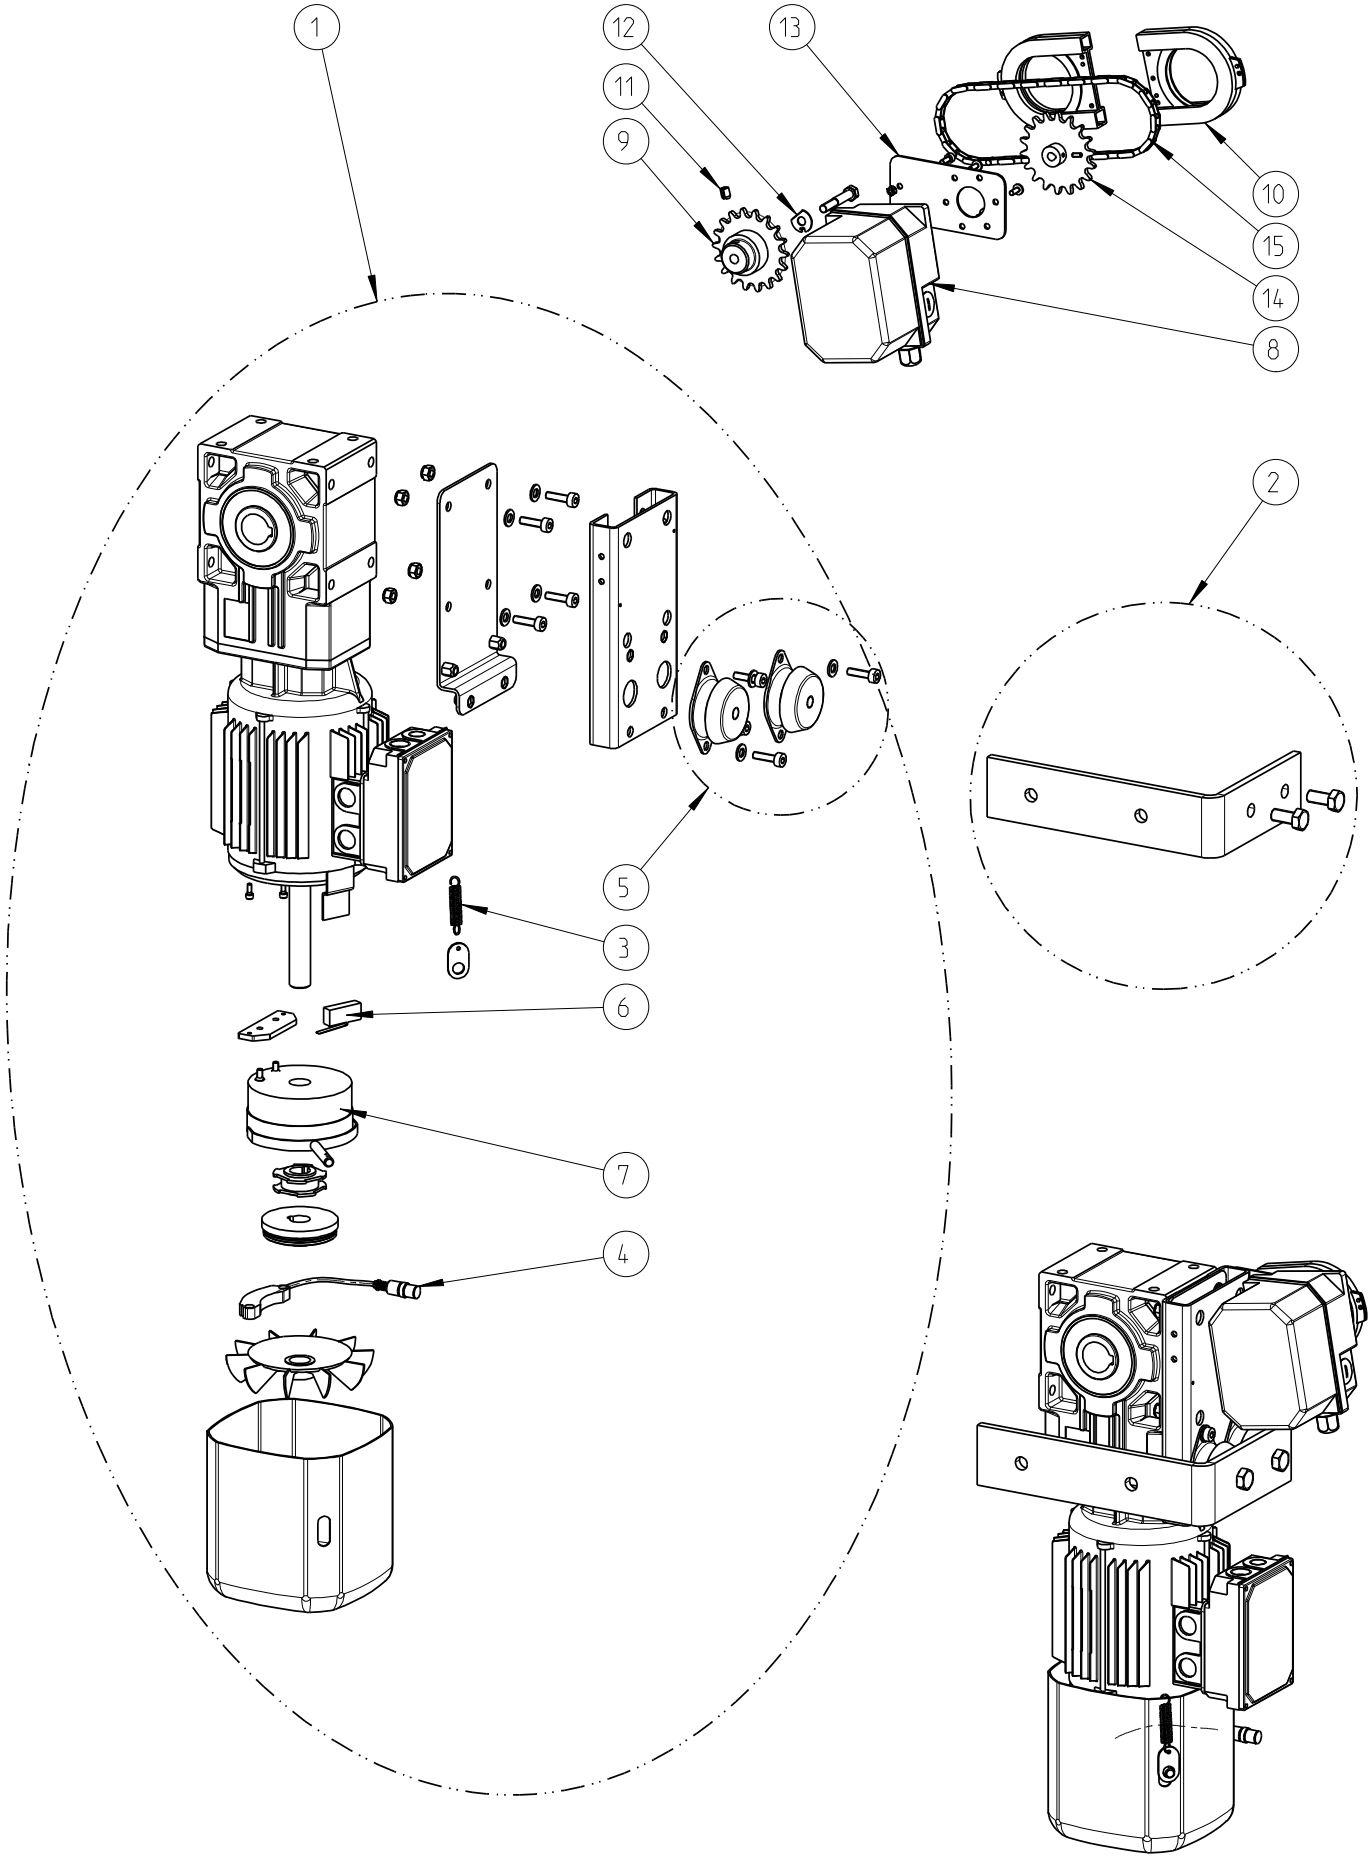


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
VIII	**Drive unit**								
1	Gear motor 10.6 complete without cables	System A; i=10.6		D8410V0007		B	Stck./pc.	1	
	Gear motor 13.9 complete without cables	System B; i=13.9		D8410V0008		B	Stck./pc.	1	
2	Torque arm with screws			D8410V0009		A	Stck./pc.	1	
3	Spring 1,2x10,5x35,4			D4802R0004		A	Stck./pc.	1	
4	Encoder 50 pulses, only electronic part			D4904R0450		A	Stck./pc.	1	
	Encoder 50 pulses cpl			D8410R0066		A	Stck./pc.	1	
5	Damper			D8410V0010		A	Satz/set	1	x
6	Microswitch			D6621R0002		A	Stck./pc.	1	
7	Brake 10 Nm 180V DC HL	for 8410V0007		D6622R0017		A	Stck./pc.	1	x
	Brake 15 Nm 180V DC HL	for 8410V0008		D6622R0018		A	Stck./pc.	1	x
8	End limit box, SRD			D4906R0007		A	Stck./pc.	0/1	
9	Chain wheel for drive shaft, SRD			D4521R0206		A	Stck./pc.	0/1	x
10	Chain cover, SRD			D4906R0015		A	Stck./pc.	0/2	
11	Roll pin 8x10, SRD			D5410R0021		A	Stck./pc.	0/1	
12	Lock wascher SRD			D5408R0301		A	Stck./pc.	0/1	
13	Bracket plate for limit box			D4521R0775		A	Stck./pc.	0/1	
14	Chain wheel for limit box			D4521R0448		A	Stck./pc.	0/1	x
15	Chain for limit box SRD			D5105R0036		A	Stck./pc.	0/1	x
16	Control cable			D8903RG145	G	B		0/1	x
		Control close to drive					Stck./pc.		
		Control in cabinet					Stck./pc.		
17	Junctionbox 9plug 6,5m cable	2m<SL<=6,5m		D4906R0027		A	Stck./pc.	0/1	x
	Junctionbox 9plug 11,5m cable	6,2m<SL<=10m		D4906R0028		A	Stck./pc.	0/1	x
18	Cable 4x0,25 6,5m GY	2m<SL<=7,8m		D4907R0110		A	Stck./pc.	0/1	x
	Cable 4x0,25 11,5m GY	7,8m<SL<=10m		D4907R0111		A	Stck./pc.	0/1	x

SL= control line

Options	
Tillval	
Optionen	
Options	

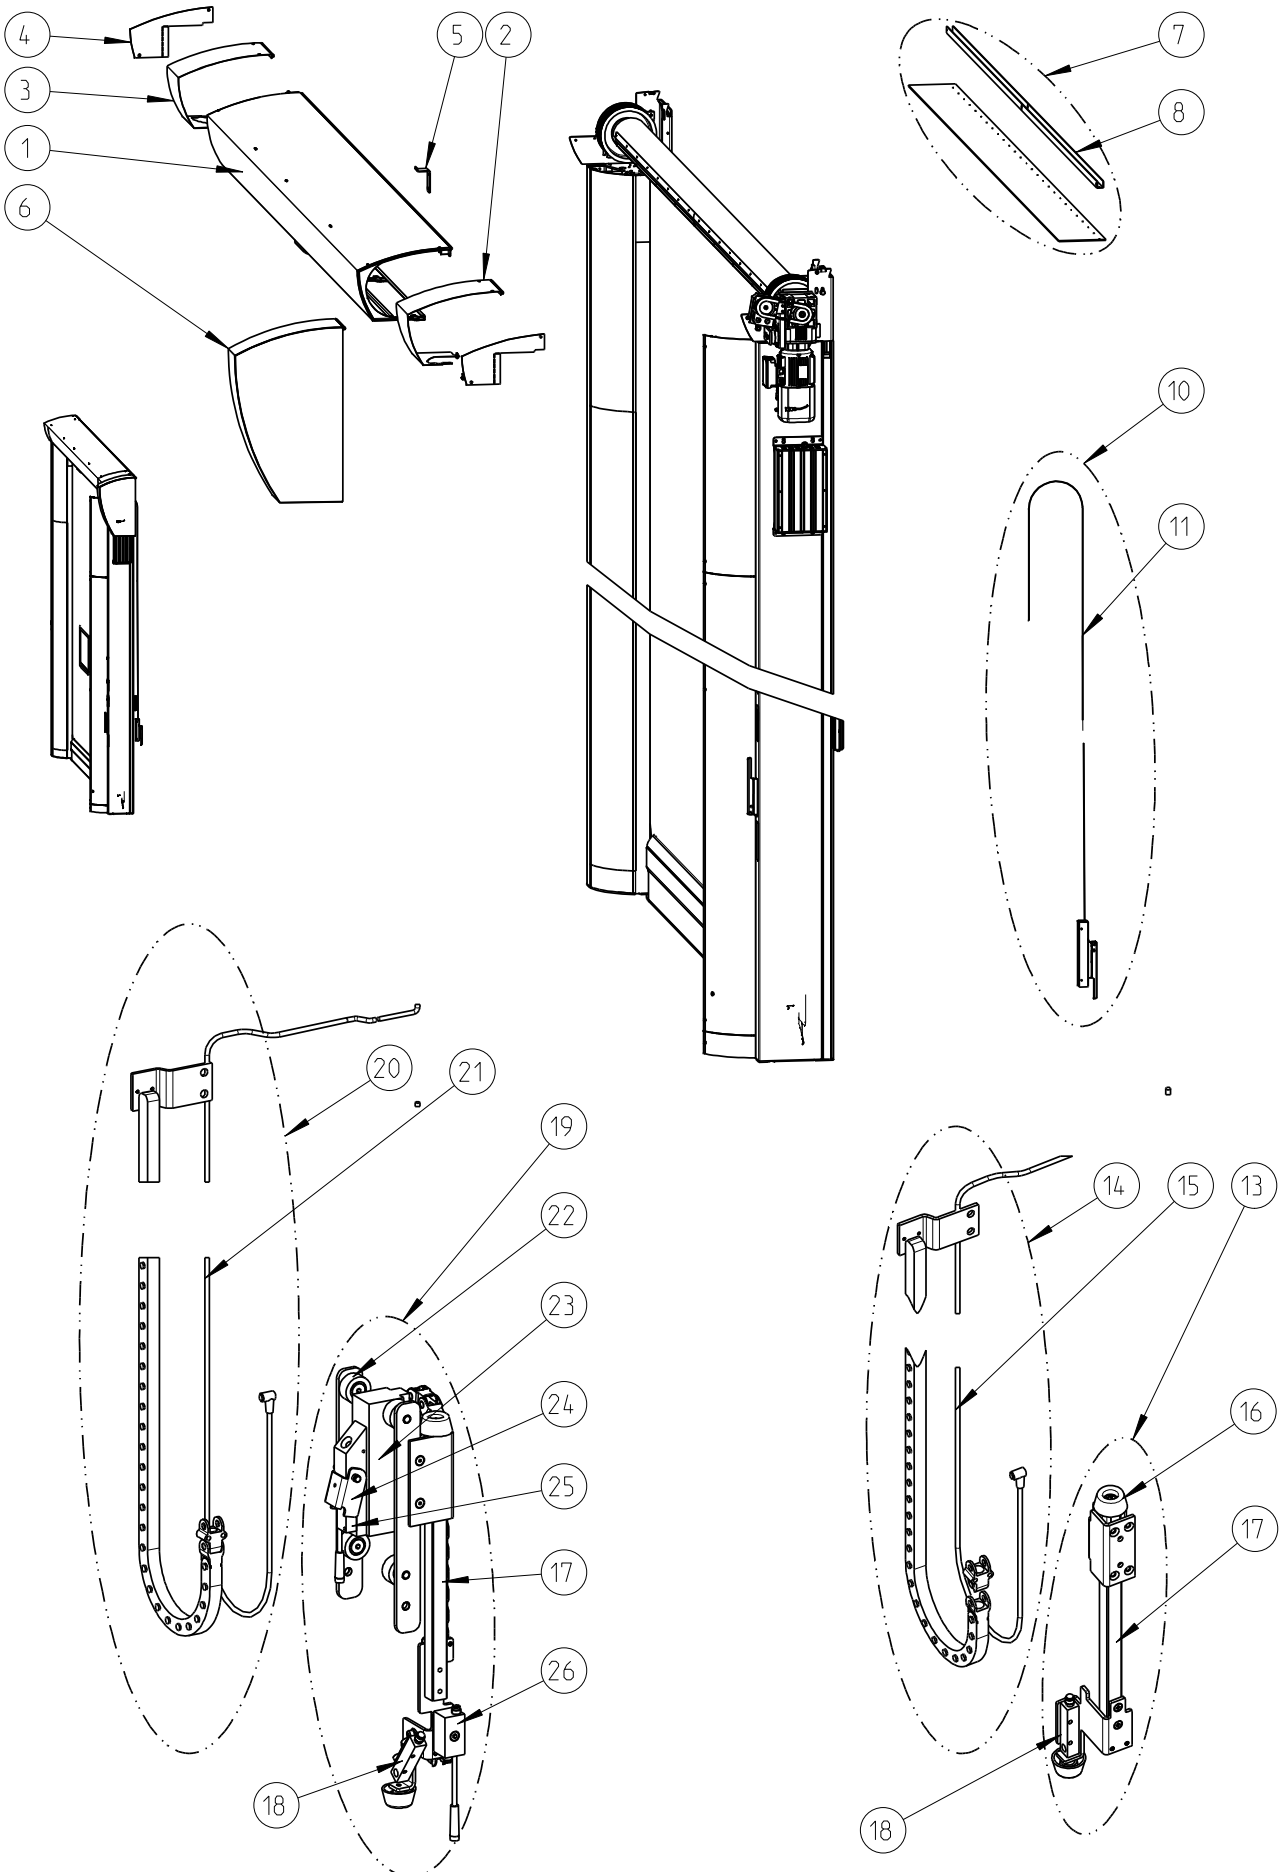


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ► gültig bis valid from ► valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
IX	**Options**								
1	Top roll cover, complete			D8560VG001	G	C	m	0-1	
	Top roll cover for integrated IR detector, complete			D8560VG002	G	C	m	0-1	
2	Cover, cable drum right			D8460V0002		A	Stck./pc.	0-1	
3	Cover, cable drum left			D8460V0003		A	Stck./pc.	0-1	
4	Side cover			D4521V0199		A	Stck./pc.	0-2	
5	Middle support, top roll cover	DW>3500 mm		D4521V0247		A	Stck./pc.	0-1	
6	Motor cover right			D8260V0002		A	Stck./pc	0-1	
	Motor cover left			D8260V0004		A	Stck./pc	0-1	
7	Complete Top roll sealing			D8270VG001	G	B	m	0-1	
8	Lintel profile			D4521RG274	G	C	m	1	
10	Break release, complete -non integrated	Front or Back, DH≤4500		D8170R0333		B	Stck./pc.	0-1	
	Break release, complete -non integrated	Front or Back, 4500<DH≤6500		D8170R0334		B	Stck./pc.	0-1	
11	Steel cable with cover for break release handle, L=7 m, integrated			D8170R0334		A	Stck./pc.	0-1	
13	Pre-running photocell, right	RH (**)	►2011-08 See Pos.18 2011-09 ► also single	D8550R0006		B	Stck./pc.	0-1	
	Pre-running photocell, left	LH (**)		D8550R0007		B	Stck./pc.	0-1	
14	Cable chain, complete with cable and bracket			D8520VG013	G	B	Stck./pc.	0-1	
15	Photocell cable for pre-running 8 m			D4907R0030		A	Stck./pc.	0-1	
	Photo cell cable for pre-running 14 m			D4907R0031		A	Stck./pc.	0-1	
	Photo cell cable for pre-running 16 m			D4907R0037		A	Stck./pc.		
16	Rubber damper			D4121V0036		A	Stck./pc.	0-4	x
17	Sliding bar pre-run/break-away			D4121V0037		A	Stck./pc.	0-2	x
18	Safety photocell receiver - grey	RH (**)	►2011-08 just in pair 2011-09 ► also single	D4904R0546		A	Stck./pc.	1	
	Safety photocell transmitter - red	LH (**)		D4904R0544		A	Stck./pc.	1	
19	Break-away with pre-running photocell, right	RH (**)	►2011-08 See Pos.18 2011-09 ► also single	D8550R0004		A	Stck./pc.	0-1	
	Break-away with pre-running photocell, left	LH (**)		D8550R0005		A	Stck./pc.	0-1	
20	Cable chain, complete with cable and bracket			D8520VG013	G	B	Stck./pc.	0-1	
21	Photocell cable for break-away / pre-running 8 m			D4907R0076		A	Stck./pc.	0-1	
	Photocell cable for break-away / pre-running 14 m			D4907R0080		A	Stck./pc.	0-1	
22	Wheel break-away			D5003R0010		A	Stck./pc.	0-8	x
23	Sliding part break-away, right			D4121V0033		A	Stck./pc.	0-1	x
	Sliding part break-away, left			D4121V0034		A	Stck./pc.	0-1	x
24	Locking disc			D4621R0329		A	Stck./pc.	0-2	x
25	Proximity switch with cabel M8			D4905R0098		A	Stck./pc.	0-2	

Options	
Tillval	
Optionen	
Options	

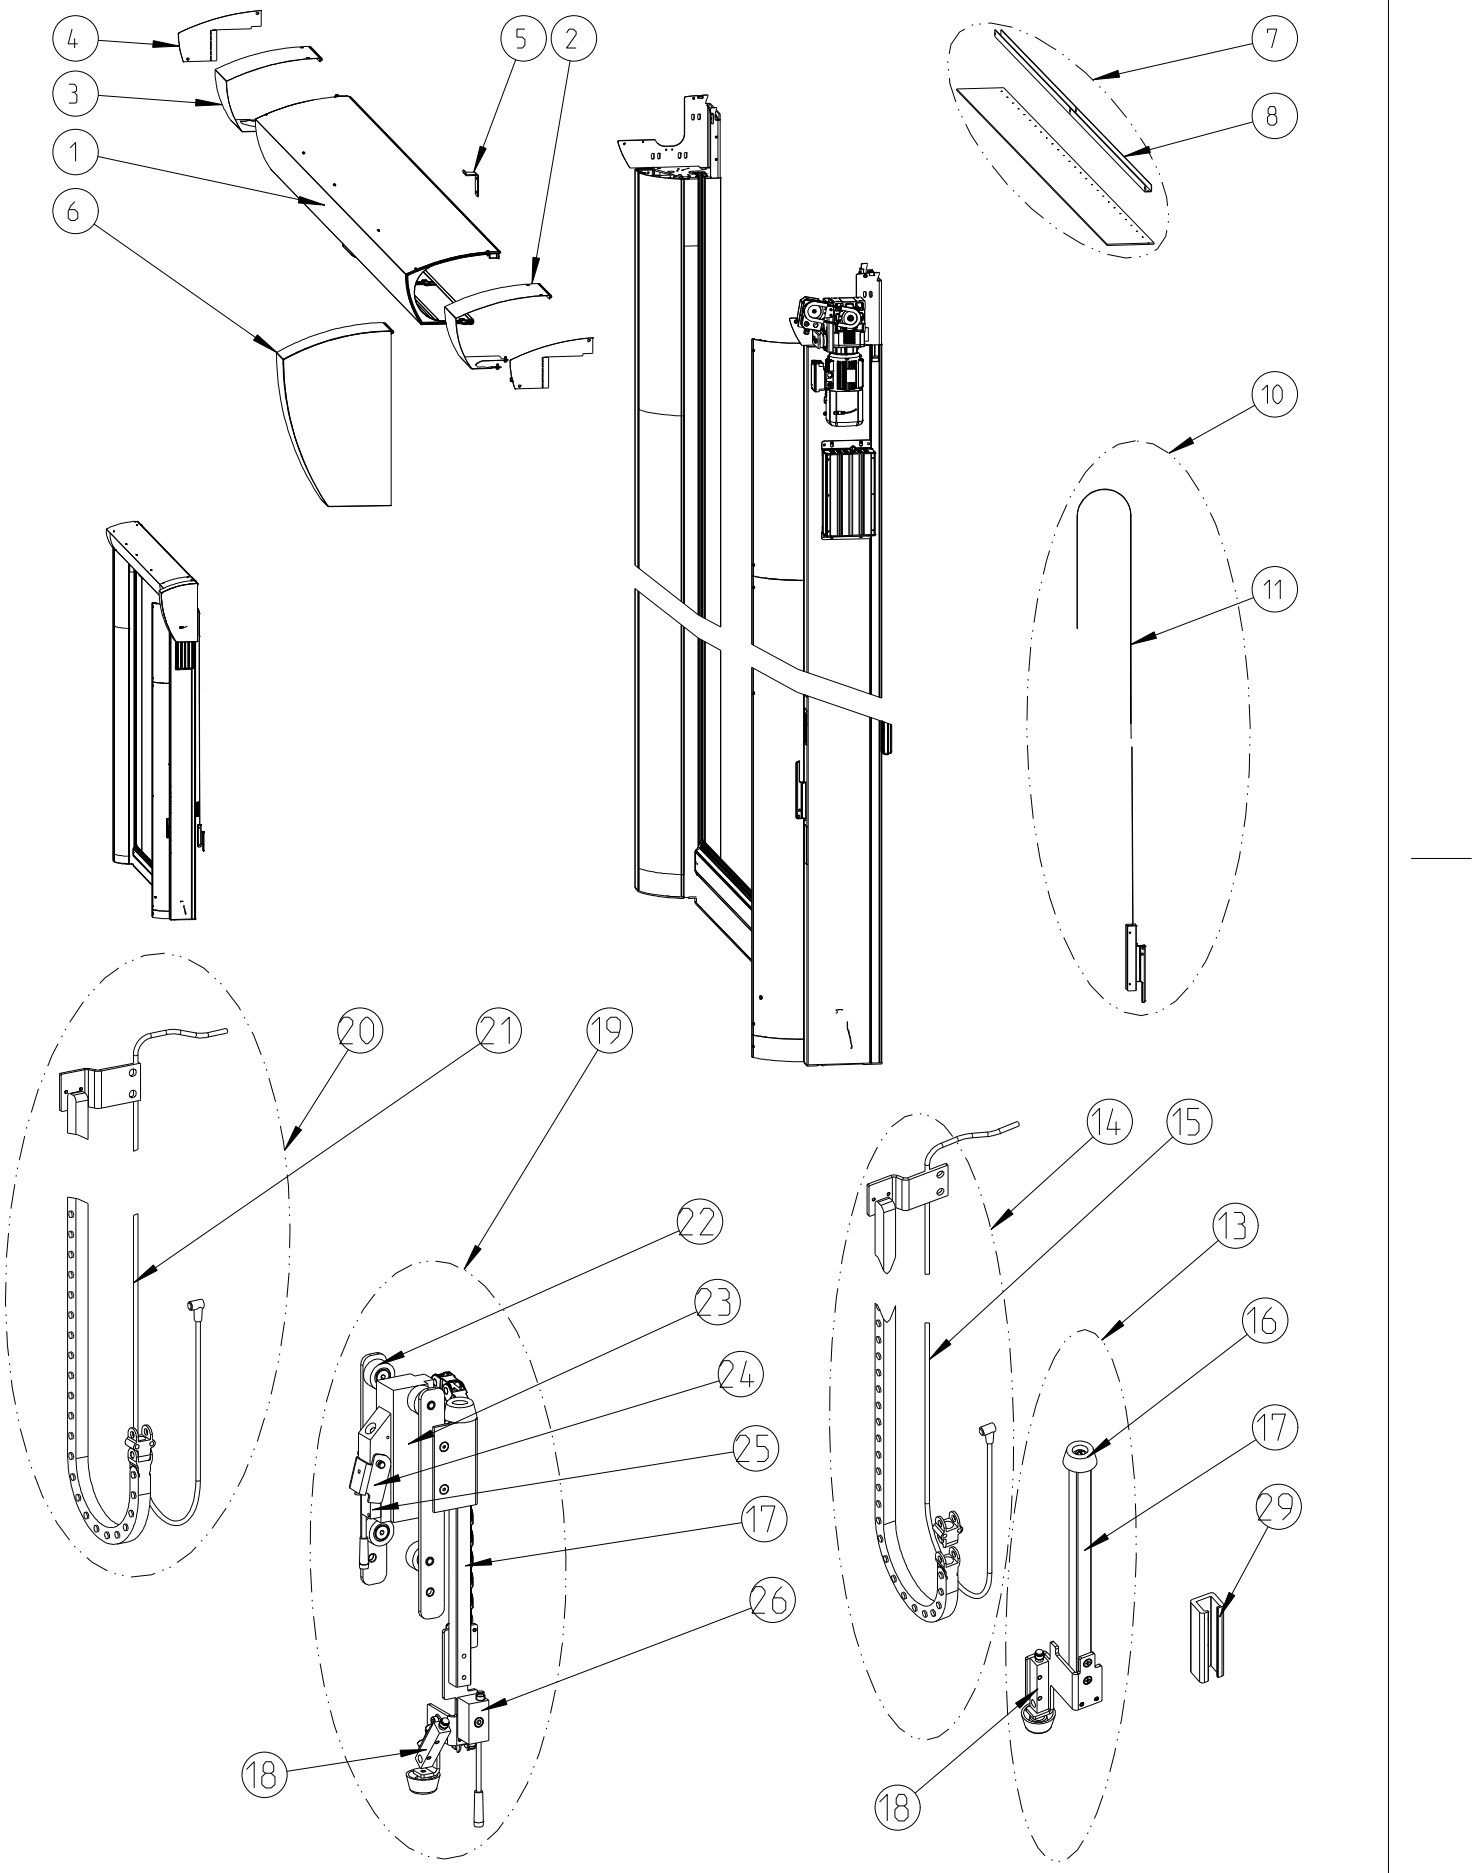


ALBANY
ASSA ABLOY

RR 600, Version 25

Pos. Item	Description	Bemerkung Note	gültig ab ▶ gültig bis valid from ▶ valid to	Art.-Nr. Item-No.	1	Delivery time class	Preis-einheit Price unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
26	Y-adapter X50, right			D4910R0032		A	Stck./pc.	0-1	
	Y-adapter X55, left			D4910R0033		A	Stck./pc.	0-1	
27	Heating element 180W/230V right			D4915V0004		A	Stck./pc.	0-1	
28	Heating element 180W/230V left			D4915V0005		A	Stck./pc.	0-1	
29	Guide profil pre-running protocell			D4721V0059		A	Stck./pc.	2	

(**) Doors ordered before end of 2011/08 needs a pair of Transmitter/Receiver (Pos.18)


	Legend
	1
G	Generic Item
	Delivery time
A	Within 24 hours
B	2-3 Workdays
C	5-8 Workdays
D	10-14 Workdays
E	On request
	Wear parts
	x = Standard wear with time/use

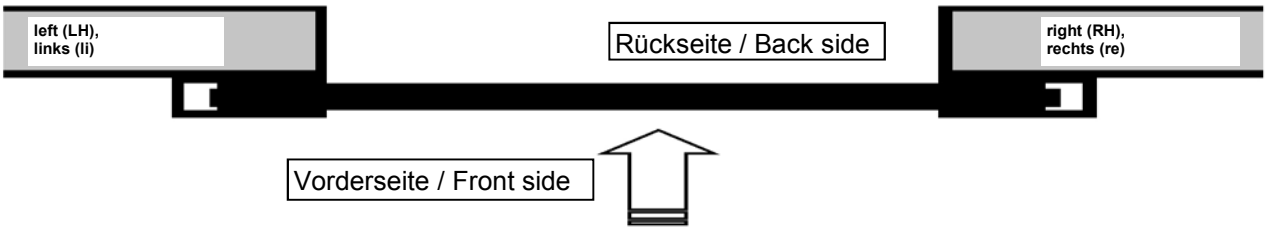

ALBANY DOOR SYSTEMS	**RR600** **Längen der Stahlseil** **Length of steel cables**	Version e / 2010-08-03

System A

(Only one set of steel cables)

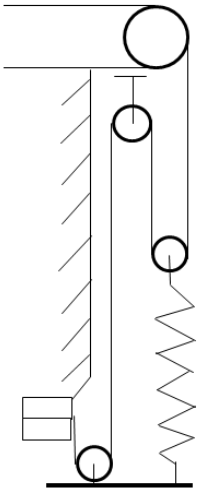


Standard / SRD / Prerunning

DH	Seillänge m. Öse/ cable length w. eye
2000-3125	13 m
3126-3875	16 m
3876-4375	18 m
4376-5375	22 m
5376-7125	29 m

Automatic crash

DH	Seillänge o. Öse / cable length no eye
2000-2375	10 m
2376-3625	15 m
3626-6000	25 m

System B

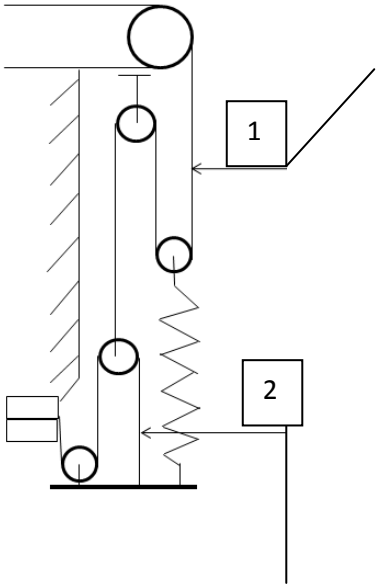

Seil / cable 1
Standard / SRD / Automatic crash / Prerunning

DH	Seillänge m. Öse / cable length w. eye
2000-2567	7,5 m
2568-4400	13 m
4401-5400	16 m
5401-6067	18 m
6068-7400	22 m
7401-7500	29 m

Seil / cable 2
Standard / SRD / Prerunning

DH	Seillänge m. Öse / cable length w. eye
2000-4333	7,5 m
4334-7500	13 m

Seil / cable 2
Automatic crash

DH	Seillänge o. Öse / cable length no eye
2000-6000	10 m
6001-7500	15 m

Stahlseile mit Öse / steel cable with eye	
Seillänge / cable length	Artikelnummer/ part number
7,5 m	5105r0070
13 m	5105r0069
16 m	5105v0006
18 m	5105v0007
22 m	5105v0009
29 m	5105v0011

Stahlseile ohne Öse für automatic crash/ steel cable without eye for automatic crash	
Seillänge / cable length	Artikelnummer / part number
10 m	5105r0072
15 m	5105r0073
25 m	5105r0074

Cable for bottom beam stopper: L=DH; 4,5 m = 5105r0071 or 7,5 m = 5105r0070

Dipl.-Ing. Meinolf Steffen, PD
Albany Door Systems GmbH •
Am Mondschein 25 • D-59557 Lippstadt • Germany
Tel: +49-2941-766-683 • Fax: +49-2941-766-136
E-mail: meinolf.steffen@albint.com

Document: K:\PE\6_Produkte\600\1.04 RR600\Berechnungen\RR600 steel cable length_e.doc
Created: 2010.08.03 15:01
Printed: 2010.08.03 15:03