**NIHVA TECHNOLOGIES**

**WEIGHT ESTIMATION SHEET**

| | | | |
|---|---|---|---|
| CLIENT | Dhoot Builders | DATE | 18-04-2024 |
| PROJECT | Motorised Sliding Gate | LOCATION | Pune |
| FINISH SIZE | 6.0 m x 2.0 m | PREPARED BY | Sumit |


| SR | DESC | DETAILS | MATERIAL GRADE | SP.GRAVITY | DIA | WIDTH | HEIGHT | THICKNESS | LENGTH | UOM | QUANTITY | WEIGHT | REMARK |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | SINGLE LEAF ( 7000 mm X 2000 mm) | Tube - Outer Frame | MS | 7.85 | | 100 | 50 | 3 | 18000 | mm | 1 | 122 | 453 |
| | | Horizontal M.S Flat Support | MS | 7.85 | | 50 | 10 | | 1800 | mm | 85 | 331 | Weight OF leaf |
| 2 | Bottom Track | En 8 Bright Hardchrome Bar | En8 | 7.85 | 20 | | | | 13.5 | M | 1 | 36 | |
| | | If ISMC C channel 100 x 50 x 5 in our scope | MS | 7.85 | | | | | 13.5 | M | 1 | 143 | |
| 3 | Post | Post | MS | 7.85 | | | | | | No's | 4 | 60 | |
| 4 | Accessories | Bottom Side wheel Assembly ( 4 inch ) | MS | 7.85 | | | | | | No's | 4 | 0 | P |
| | | Nylon Roller with Bearing | | | | | | | 200 | mm | 8 | 0 | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | Weight For Required Qty | 1 | 693 | |
| | | | | | | | | | | Weight Including Safety Factor | 1.5 | 1039 | |

Mode Of Operation = Motorised

Motor Selection = According | 680.1 | kg

CD between 2 M.S Flat = 30mm

**REFERENCE IMAGE**

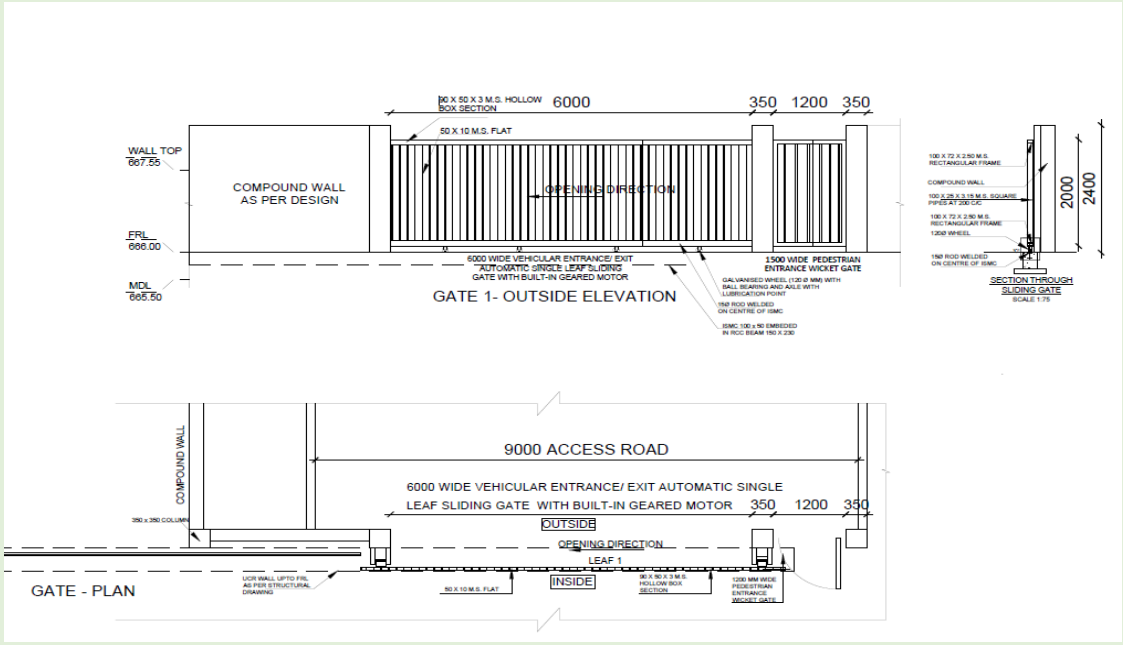

## NIHVA TECHNOLOGIES

### WEIGHT ESTIMATION SHEET

| | | | |
|---|---|---|---|
| CLIENT | Dhoot Builders | DATE | 18-04-2024 |
| PROJECT | Wicket Gate | LOCATION | Pune |
| FINISH SIZE | 1.2 m x 2.0 m | PREPARED BY | Sumit |

| SR | DESC | DETAILS | MATERIAL GRADE | SP.GRAVITY | DIA | WIDTH | HEIGHT | THICKNESS | LENGTH | UOM | QUANTITY | WEIGHT | REMARK |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | SINGLE LEAF ( 7000 mm X 2000 mm) | Tube - Outer Frame | MS | 7.85 | | 100 | 50 | 3 | 6400 | mm | 1 | 43 | 90 |
| | | Horizontal M.S Flat Support | MS | 7.85 | | 50 | 10 | | 1800 | mm | 12 | 47 | Weight OF leaf |
| 3 | Post | Post | MS | 7.85 | | | | | | No's | 1 | 15 | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | Weight For Required Qty | 1 | 105 | |
| | | | | | | | | | | Weight Including Safety Factor | 1.5 | 158 | |

CD between 2 M.S Flat = 30mm

### REFERENCE IMAGE

