





Elevation

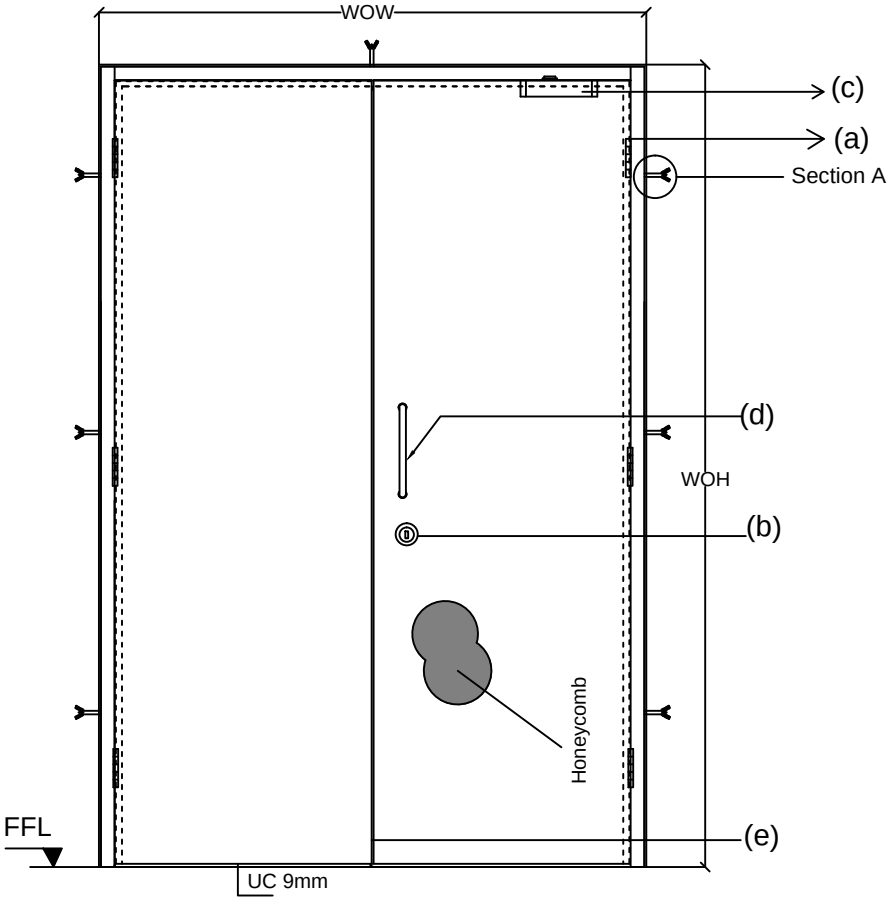

Top View

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

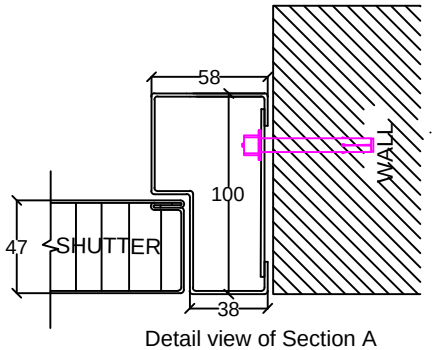

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges size 4"x3'x3mm

(b) LOCK : Mortise Dead lock,Cylinder(Both side key) with Escutcheon

(c) DOOR CLOSER F8500

(d) HANDLE : D Handle(254 mm)

(e) CONCEALED FLUSH BOLT-300mm

Shutter thickness : 47 mm
Frame Sheet thick : 1.2mm
Shutter sheet thick :0.8mm
Fixing : On Soliid Brick plasterd wall with Anchors
Electrostatic powder coated

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

SS door size		
WOW	WOH	QUANTITY
1990	2170	1

ORIENTATION- TYPE 6 RIGHT HAND ACTIVE
LOCATION- KITCHEN ROOM

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

SS DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	06/06/16	
CHECK	ANIL	06/06/16	
REV.	01		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - MARS INTERNATIONAL
PROJECT -
SITE -
DWG. NO. - NIHVA/16-17/0014
SCALE:01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com