
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

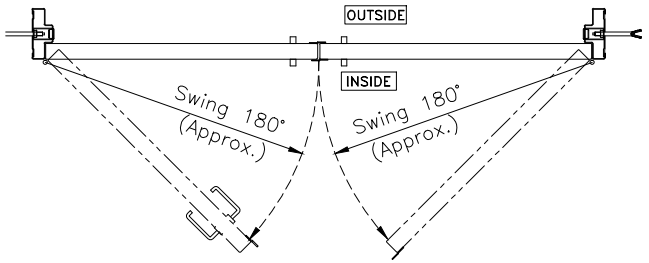



**SPECIFICATIONS :–**


H – Overall Height of Door Frame.
W – Overall Width of Door Frame.
h – Clear Height opening (H–132 mm approx).
C – Clear Width opening (W–200 mm).
T – Nominal Shutter Thickness = (60mm approx).
D – Depth of Door Frame (142mm approx).
– Dimension Active shutter side.
– Dimension Inactive shutter side.

**NOTES :–**


1) Door Frame shall be fabricated from 2Thk. CRCA steel sheets to form a stepped profile & fixed to wall with Holdfasts.
2) Shutter Panels shall be fabricated from 1.25Thk. Galv. steel having lock seam joints to provide a nominal thickness of 60mm. Shutter flatness may vary till 8mm depending upon the door size & shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. 4" Ball Bearing Hinges shall be provided on each shutter.
4) Accessories to be provided on Door are as follows :–
   A) 200mm D Handle Pair – 1no.
   B) 300mm towerbolt inactive leaf– 1nos.
   C) Door closer – 1no.

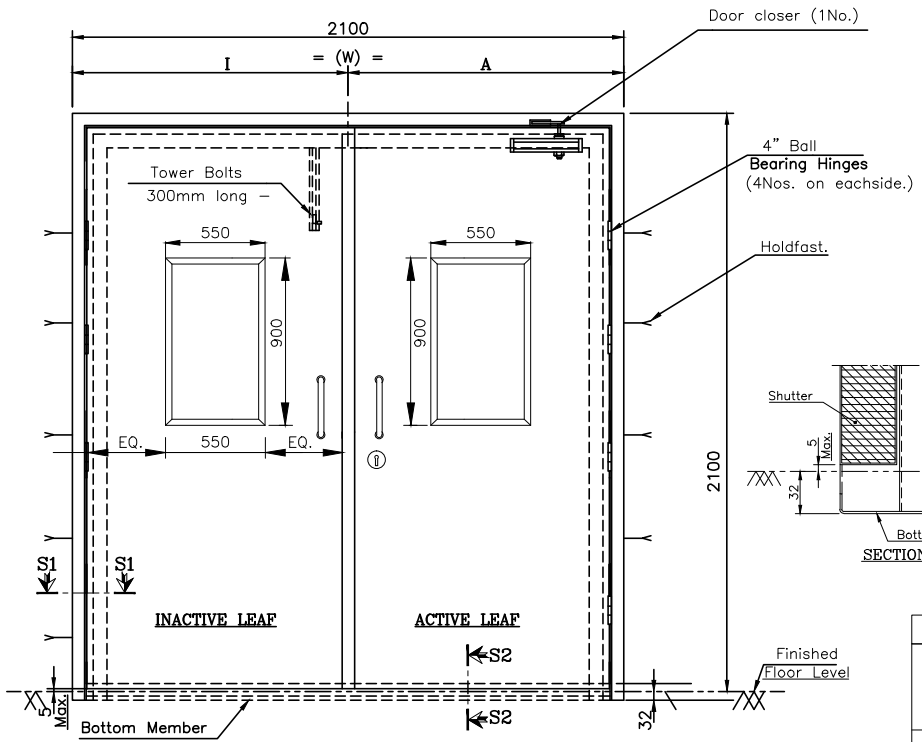


DOUBLE LEAF DOOR
Opening Outside Right Leaf Active

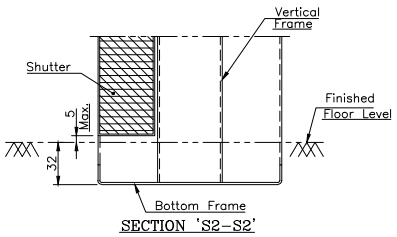


SECTION 'S2–S2'

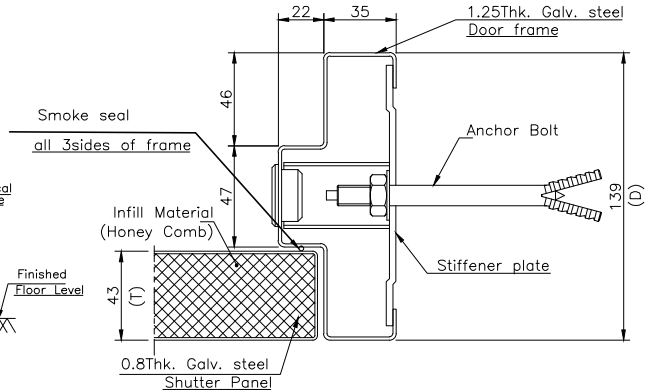


SECTION 'S1–S1'

QUANTITY:–7Nos.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

| TITLE | | | |
|---|---|---|---|
| STEEL DOOR | | | NIHVA TECHNOLOGY PVT. LTD. PUNE. Tel : 020 66304031 Email:– info@nihva.com Website:– www.nihva.com |
| | SIGN | DATE | |
| DRAWN | ABHIJIT | 16/10/15 | CLIENT – SKIPPER ELECTRICALS |
| CHECK | ANIL | 16/10/15 | PROJECT – |
| REV. | 02 | | SITE – |
| CLIENT APPROVAL | | | DWG. NO. – NIHVA/15–16/146 |
| | | | SCALE: 01 \| Ref. No. \| SHEET: 01 |
| ALL DIMENSION ARE IN mm | | | If any queries contact : projects@nihva.com |

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT