**NIHVA TECHNOLOGIES**

**WEIGHT ESTIMATION SHEET**

| | | | |
|---|---|---|---|
| CLIENT | FUJI | DATE | 3/4/2024 |
| PROJECT | Motorised Sliding Gate | LOCATION | Pune |
| FINISH SIZE | 5 m x 1.82 m | PREPARED BY | Jayesh |

| SR | DESC | DETAILS | MATERIAL GRADE | SP.GRAVITY | DIA | WIDTH | HEIGHT | THICKNESS | LENGTH | UOM | QUANTITY | WEIGHT | REMARK |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | SINGLE LEAF ( 6028 mm X 1728 mm) | Tube - Outer Frame | MS | 7.85 | | 75 | 75 | 3 | 15556 | mm | 1 | 106 | 915 |
| | | vertical Tube type 1 - Inner | MS | 7.85 | | 125 | | 4 | 1750 | mm | 82 | 573 | Weight OF leaf |
| | | vertical Tube type 1 - Inner | MS | 7.85 | | 75 | | 4 | 1750 | mm | 55 | 237 | |
| 2 | Bottom Track | En 8 Bright Hardchrome Bar | En8 | 7.85 | 20 | | | | 13 | M | 1 | 35 | |
| | | If ISMB 100 in our scope | MS | 7.85 | | | | | 13 | M | 1 | 156 | |
| | Post | Bracket | MS | 7.85 | | 100 | | 16 | 900 | No's | 3 | 39 | |
| 3 | Accessories | Bottom Side wheel Assembly ( 4 inch ) | MS | 7.85 | | | | | | No's | 5 | 0 | |
| | | Nylon Roller with Bearing | | | 100 | | | | 200 | mm | 24 | 0 | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | Weight For Required Qty | 1 | 1145 | |
| | | | | | | | | | | Weight Including Safety Factor | 1.5 | 1718 | |


Mode Of Operation = Motorised

Motor Selection = According | 1373.1 | kg

Weigth of Wooden Member not considered

Weight As per Provided Reference Drawing

**REFERENCE IMAGE**

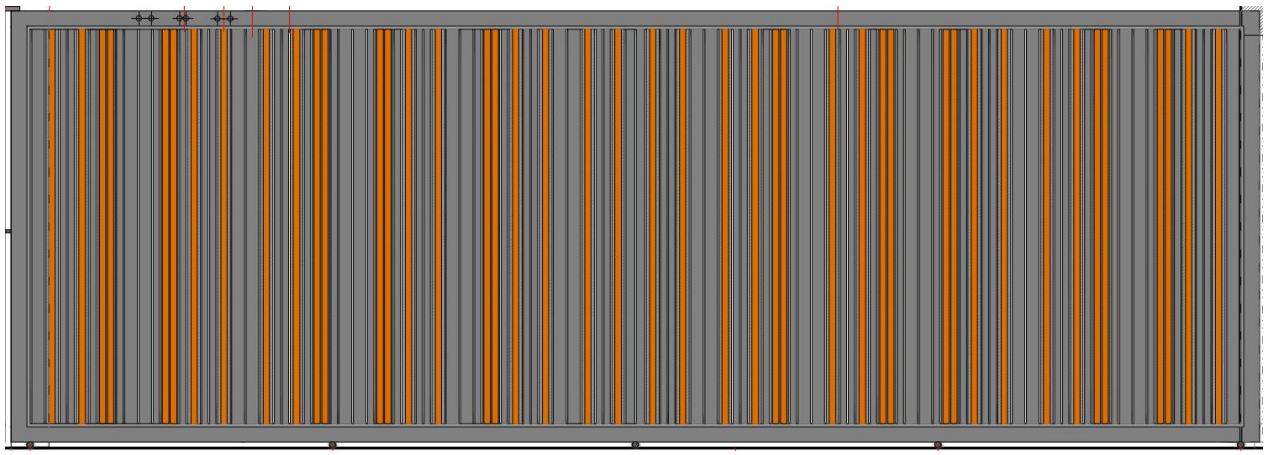

| NIHVA TECHNOLOGIES | | | |
|---|---|---|---|
| WEIGHT ESTIMATION SHEET | | | |
| CLIENT | FUJI | DATE | 3/4/2024 |
| PROJECT | Motorised Sliding Gate | LOCATION | Pune |
| FINISH SIZE | 5 m x 1.82 m | PREPARED BY | Jayesh |

| SR | DESC | DETAILS | MATERIAL GRADE | SP.GRAVITY | DIA | WIDTH | HEIGHT | THICKNESS | LENGTH | UOM | QUANTITY | WEIGHT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | SINGLE LEAF ( 865 mm X 1828 mm) | Tube - Outer Frame | MS | 7.85 | | 75 | 75 | 3 | 5382 | mm | 1 | 37 |
| | | vertical Tube type 1 - Inner | MS | 7.85 | | 125 | | 4 | 1828 | mm | 12 | 86 |
| | | vertical Tube type 1 - Inner | MS | 7.85 | | 75 | | 4 | 1828 | mm | 10 | 43 |
| 2 | Accessories | MS Pivot | MS | | | | | | | Set | 2 | 0 |
| | | Manual Lock | MS | | | | | | | Set | 1 | 0 |
| | | | | | | | | | | | | |
| | | | | | | | | | | Weight For Required Qty | 1 | 166 |
| | | | | | | | | | | Weight Including Safety Factor | 1.5 | 248 |

Mode Of Operation = Manual

Weight As per Provided Reference Drawing

**REFERENCE IMAGE**

