
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT




SPECIFICATIONS :–


H – Overall Height of Door Frame.
W – Overall Width of Door Frame.
h – Clear Height opening.(H–89mm Approx.)
C – Clear Width opening.(W–110mm Approx.)
T – Nominal Shutter Thickness 43mm approx.
D – Depth of Door Frame (139mm approx).

ACCESSORIES DETAILS :–


1) Door Frame shall be fabricated from 1.2Thk. Glav. steel sheets to form a double rebate profile & fixed to PEB structure.
2) Shutter Panels will be fabricated from 0.8MMThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 47mm. Shutter flatness may vary till 5mm.& shutters will have infill material with reinforcements at top, bottom edges & for hardware fitments. each Shutter.
3) 4nos. of SS 4" Ball Bearing Butt Hinges will be provided on
4) Other accessories will be provided on Door are as follows :–
   a) Door Closer – 1no.
   b) Mortise Lock with Latch– 1no.
   c) Lever Handle – 1no.
5) Fixing on PEB frame.

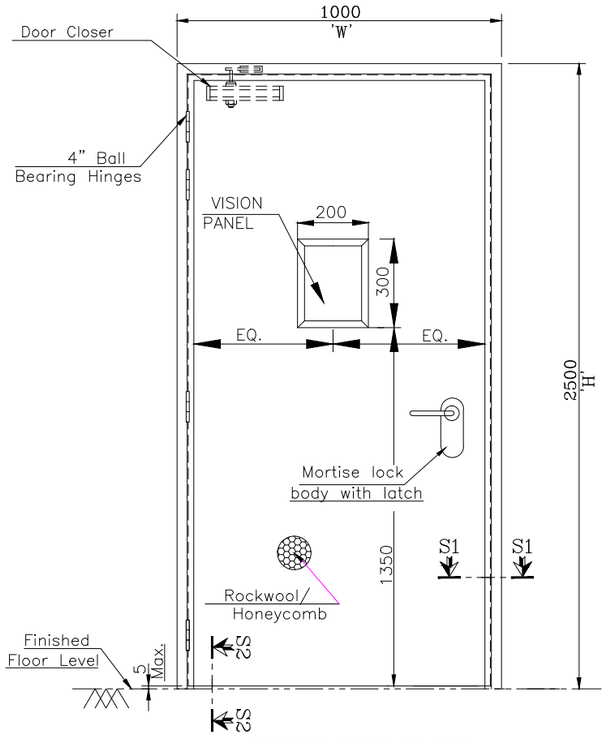


SINGLE LEAF DOORS

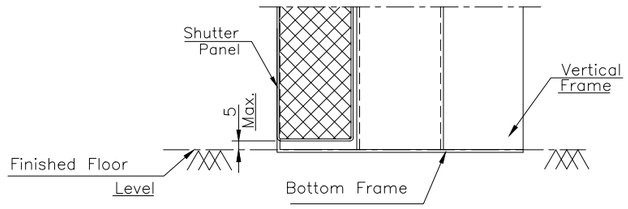

SECTION 'S2–S2'

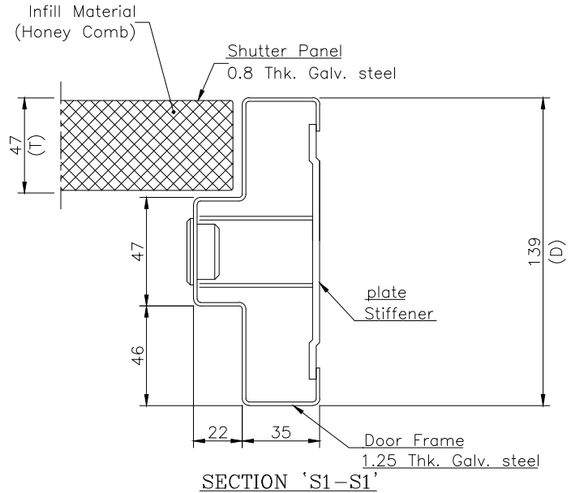

SECTION 'S1–S1'



NOTES:–

1. All dimensions are in mm.
2. All civil work required is in client scope.
3. Color– RAL5015 (Sky blue) from outside
   RAL3011 (Red) from inside
4. Fire rating : 2 hrs

REV :– 01 (14/02/2022)

1. Mentioned RAL shade from inside and outside.
2. Specified mounting of door on PEB structure.
3. Specified fire rating of door.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE			
SINGLE LEAF FIRE DOOR			
	NAME	SIGN	DATE
DRAWN	G.P.		04.02.22
CHECK	A.K.		04.02.22
APPRD.	V.T.		04.02.22

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:– info@nihva.com
Website:– www.nihva.com

If any queries contact : design@nihva.com	CLIENT – REWARD CONSTRUCTION
ALL DIMENSION ARE IN mm	LOCATION – INDAPUR
	PRODUCT – FIRE DOOR (1000 W x 2500 H)
	NIHVA\21–22\CLT\331 REV– 01
	SCALE: NTS SHEET: 01 OF 01

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT