



" T " TYPE GUIDE

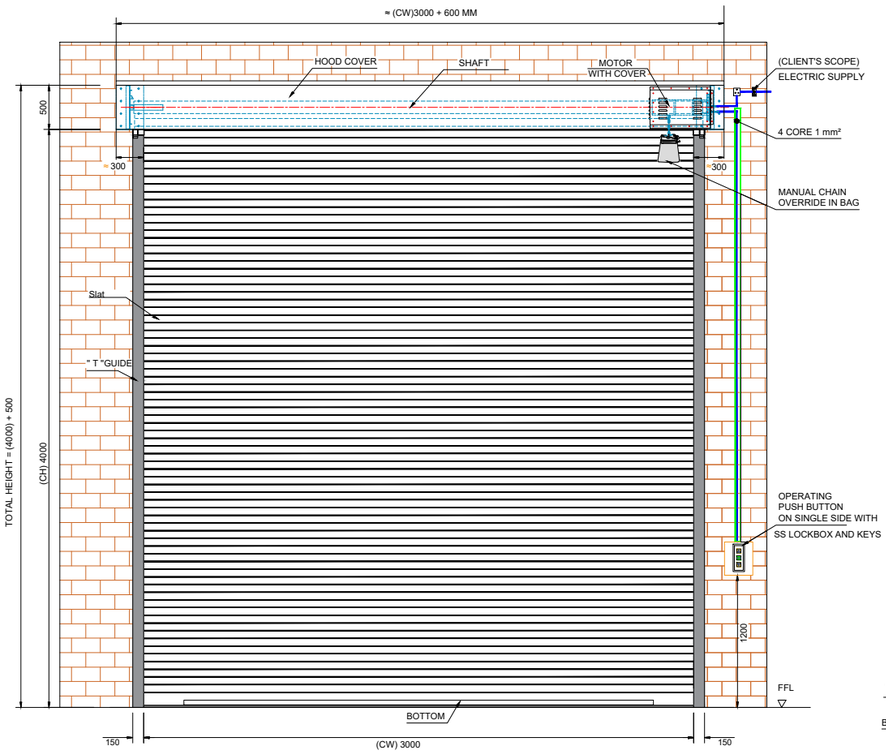

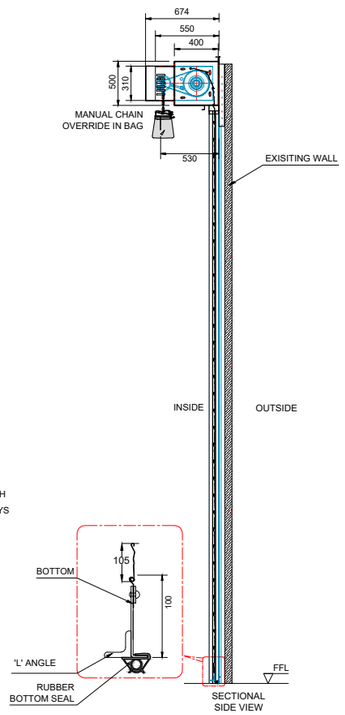

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	CE - CERTIFIED INDIRECT DRIVE MOTOR WITH EMERGENCY CHAIN .
2.	LOCATION AREA	INSIDE
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL+ON CONCRETE/STEEL&SIDE
4.	SLAT	CURVED 105 MM GI SHEET - 1.2 MM THK
5.	BOTTOM PROFILE	GI BOTTOM PROFILE WITH EPDM RUBBER SEALING
6.	GUIDE PROFILE	M.S."T" SHAPE 65 MM - 150X3 MM THK .
7.	HOOD COVER & MOTOR COVER	MADE OF MS SHEET THICKNESS 1.2 MM.
8.	COLOUR	ONE COAT OF EPOXY PRIMER (DFT - 50±5 MICRON) AND TWO COATS OF EPOXY PAINT - RAL 7016 (DFT - 50±5 MICRON)
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

IMPORTANT NOTES:-

1. THIS IS MOTORIZED ROLLING SHUTTER, HENCE NO NEED OF SPRING & BALL BEARING.
2. LOCKING PROVISION FOR MOTORIZED ROLLING SHUTTER , IT IS NOT FEASIBLE TO PROVIDE AN INTERNAL/EXTERNAL LOCK ON THE BOTTOM PROFILE DUE TO SAFETY CONCERNS.
3. STORM ANCHORS & SEALS ON GUIDE NOT NEEDED.

R01 - ALL MENTIONED COMMENTS ARE INCORPORATED IN THE GA DRAWING

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3000 mm	4000 mm	04

Note :-

1. All Dimension are in mm

Neelesh N Amberkar

Digitally signed by Neelesh N Amberkar
DN: cn=Neelesh N Amberkar, c=IN, o=LO-GOI Group, ou=Design, email=neelesh.amberkar@logoigroup.com
Reason: Approved for execution
Date: 2025.10.06 16:31:24 +05'30'

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
			CLIENT - GS PEB & CIVIL WORK PVT. LTD.
DRAWN	B.S.	24-07-2025	PROJECT - MOTORISED ROLLING SHUTTER
CHECK & APPROVAL	V.T.	24-07-2025	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/GB/2411001 — REV-00
			SCALE: NTS — WT: — SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com