PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

SR. NO.


NOTES :-


1) Door Frame shall be fabricated from 1.2mmThk. Glav. steel sheets to form a double rebate profile & fixed to wall with Anchor bolts.
2) Shutter Panels shall be fabricated from 0.8mmThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm.& shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. of SS Ball Bearing Butt Hinges shall be provided on each Shutter Size 4"x3"X3mm--
4) Dorma PHCR 1000 Panic bar with Outsie trim
5) Door Closer

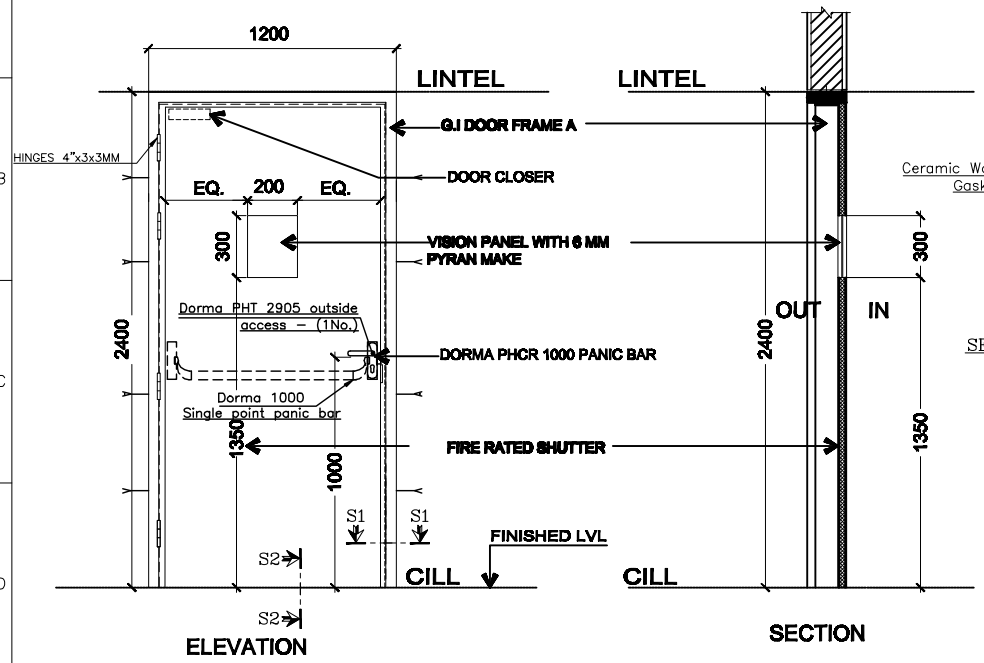






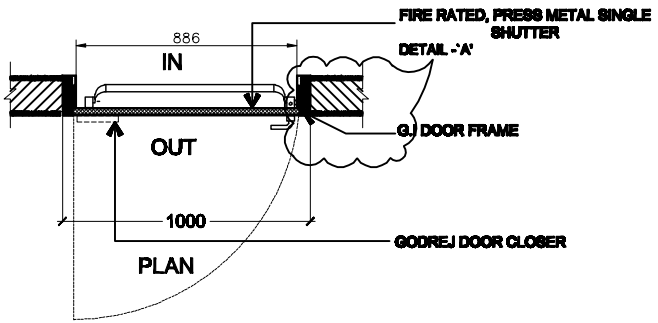



SECTION 'S3-S3'

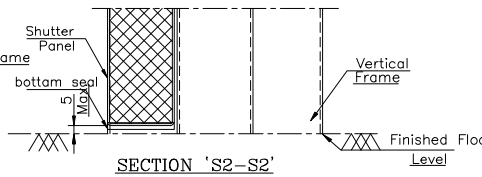


SECTION 'S2-S2'

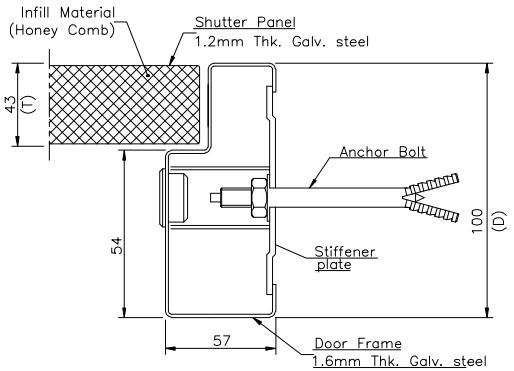


| Size 1200X2400 |
| --- |
| 2hr,FIRE RATED DOOR |

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.
Client Name-Nyati
Product Name-Fire Door

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT