



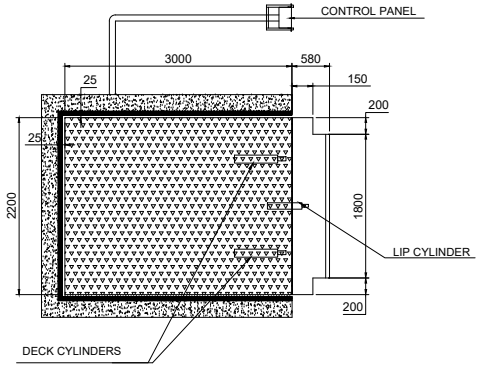


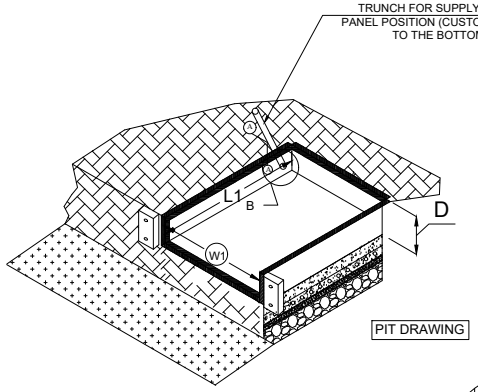

PIT DRAWING

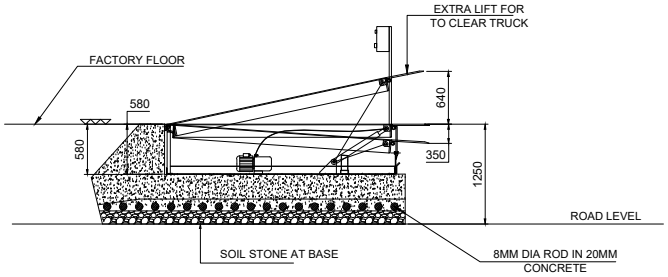





TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	CAPACITY	6 TON
2.	DOCK OPERATION MODE	HYDRAULIC OPERATED
3.	LIP OPERATION MODE	HYDRAULIC
4.	LIP SIZE	2200X580 MM
5.	SHUT HEIGHT	580 MM
6.	PLATFORM SHEET THICKNESS	8 MM
7.	LIP SHEET THICKNESS	14 MM
8.	RAL COLOUR	GREY , RAL 7015 LIP: ORANGE, RAL 2000

DOCK LEVLLER SIZES :-

SR	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP LENGTH (C)	QTY
1	2200	3000	580	580	10

DOCK LEVLLER PIT SIZES :-

SR	WIDTH (W1)	LENGTH (L1)	HEIGHT (D)	QTY
1	2250	3050	580	10

NOTE :-
1. All DIMENSIONS ARE IN MM.

NOTE :

MAXIMUM NON-SLIP SLOPE RECOMMENDED BY EN 1398:12.5%(1:8) IS THE UPPER LIMIT REFERENCED FOR SAFE OPERATION(ACTUAL USABLE SLOPE DEPENDS ON VEHICLE TYPE). TYPICAL RECOMMENDED SLOPES FOR EQUIPMENT : PALLET JACK - 3-4 % ,ELECTRIC FORKLIFT UP TO -10% , INTERNAL COMBUSTION FORKLIFT UP TO -12.5% .

SPECIAL INSTRUCTION'S :

ROAD LEVEL HEIGHT DEPENDS VEHICLE TYPE -
LOWER HEIGHT OF VEHICLE - 1250 MM
HIGHEST HEIGHT OF VEHICLE - 1350 MM

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE	DOOR AUTOMATION		NIHVA TECHNOLOGY PVT. LTD. PUNE
	SIGN	DATE	Email:- Sales@nihva.com Website:- www.nihva.com
DRAWN	B.S	13/02/26	CLIENT - SIEGWERK INDIA PVT. LTD.
CHECK	B.S	13/02/26	PROJECT - HYDRAULIC DOCK LEVELER
APPROVAL	V.T	13/02/26	
REV	00		SITE - BHIWADI
If any queries contact : Design@nihva.com			SCALE: - WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			DWG. NO. : NIHVA/25-26/183