

PROPOSED PLAN LAYOUT

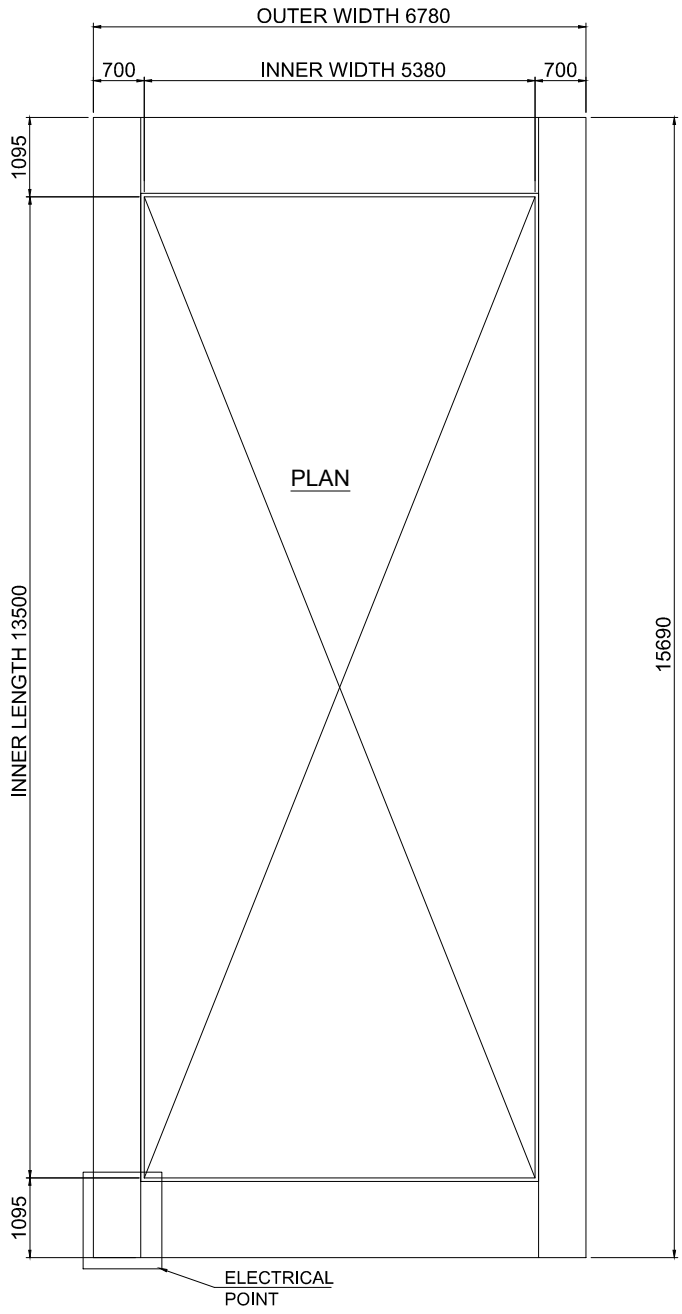

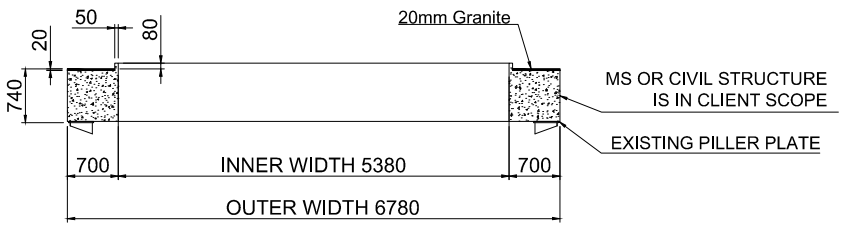

SECTION VIEW

1. THE STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE OF GRANITE 20MM FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 80MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. AL PROFILE - POWDER COATED
6. GASKET - EPDM
7. MOTOR - ITALIAN/GERMAN MAKE
8. ELECTRICAL REQUIREMENT - .
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK IS IN CLIENT SCOPE

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern

TITLE: PROPOSED PLAN LAYOUT (IN CLIENT SCOPE)				NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE	
DRAWN	N. K.		09.02.2023	CLIENT - MR. RAHUL KUL
CHECK	P. M.		09.02.2023	LOCATION - DAUND
APPRD.	V. T.		09.02.2023	PRODUCT - RETRACTABLE ROOF
If any queries contact : supportautomation@nihva.com				NIHVA\22-23\02XX
ALL DIMENSION ARE IN mm				SCALE: NTS / SHEET: