



" T " TYPE GUIDE

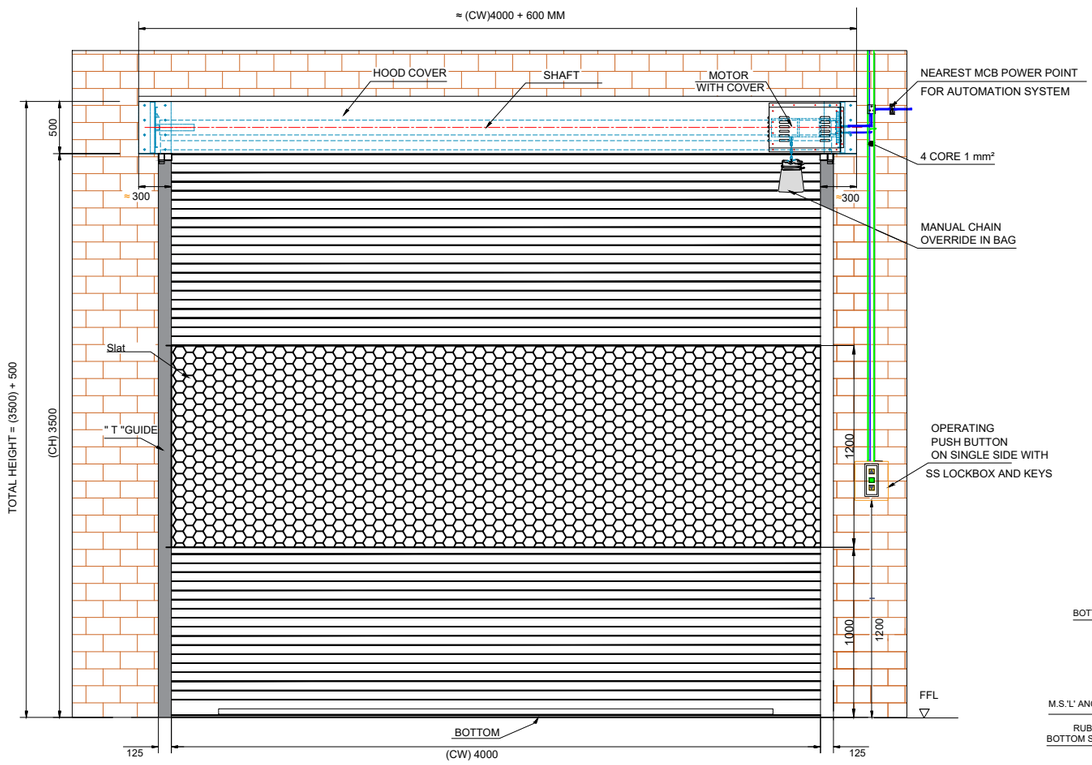

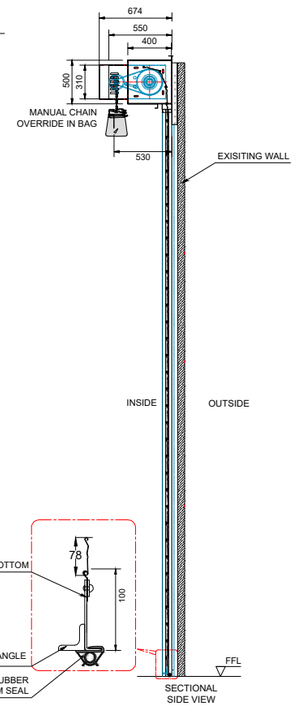

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE) SPROCKET CHAIN ARRANGEMENT.
2.	LOCATION AREA	INSIDE
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL+ON CONCRETE/STEEL&SIDE
4.	SLAT	CURVED 78 MM GI SHEET - 1.2 MM THICK
5.	BOTTOM PROFILE	M.S. PLATE 100MMX2.5MM THICK WITH ANGULAR STIFFENER.
6.	GUIDE PROFILE	M.S." T " SHAPE 65-150X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	COLOUR	TWO COATS OF EPOXY PAINT RAL9003
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE
10.	TYPE OF MOTOR	AC
11.	POWER SUPPLY	1Ø PHASE
12.	RATED VOLTAGE FREQUENCY - (V/HZ)	220/50
13.	RATED CURRENT - (A)	3.3

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4000 mm	3500 mm	01

LOCATION :- SOLID WASTE MANAGEMENT
RS-02-4000X3500 MM

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	B.S.	11/09/2025
CHECK & APPROVAL	V.T.	11/09/2025

CLIENT - SUROJ BUILDCON PVT LTD
PROJECT - MOTORISED ROLLING SHUTTER
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/24-25/GB/1109001 | REV-00
SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm
If any queries contact : design@nihva.com