

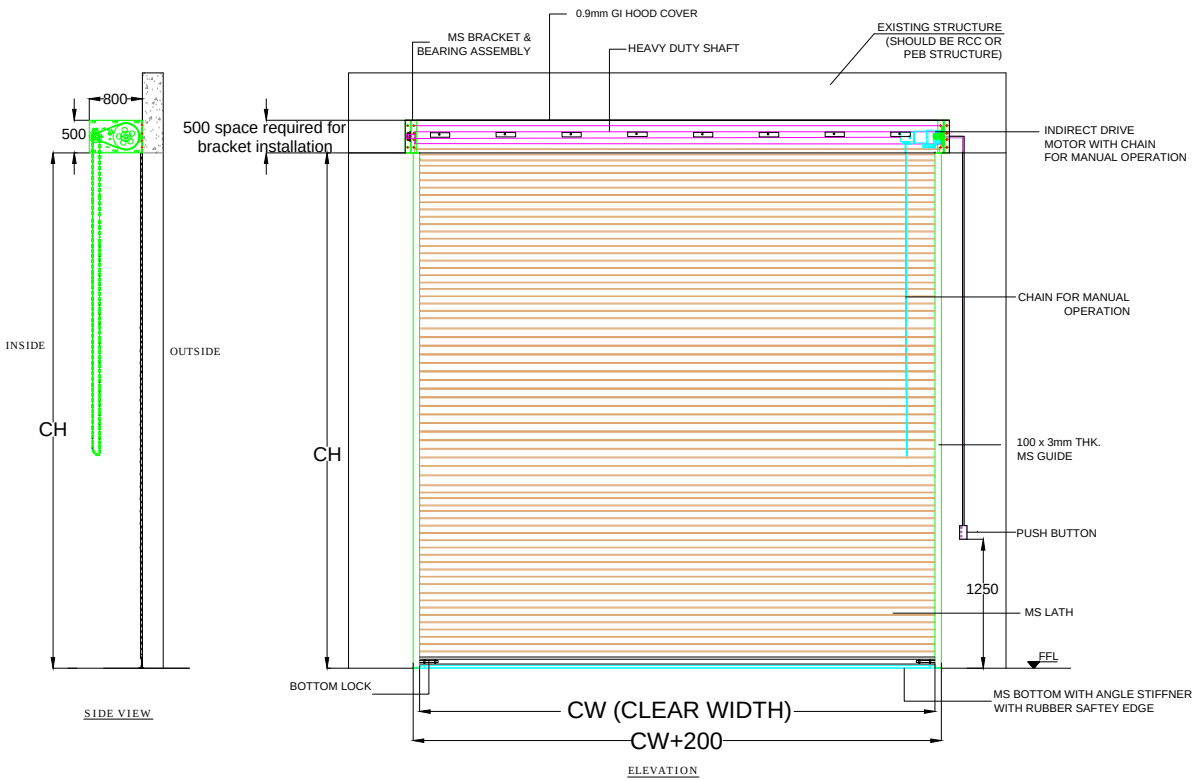


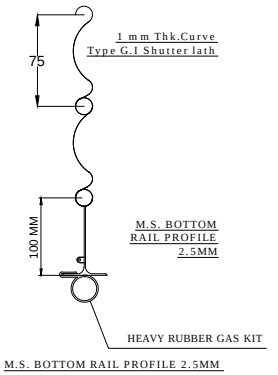

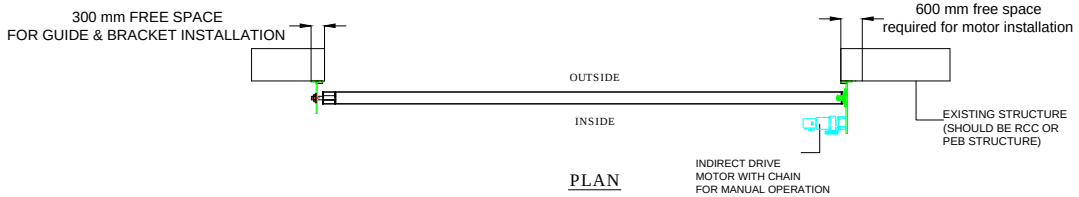

NOTE:
1. REQUIRED STRUCTURE FOR SHUTTER SHALL BE IN CLIENT SCOPE.
2. ONE COAT OF RED OXIDE PRIMER WILL BE GIVEN TO THE SHUTTER.
3. SINGLE PHASE. 3CORE 1.2SQ. CABLE REQUIRED AT SITE (CLIENT'S SCOPE)

TOLERANCE - ±10mm

CLEAR WIDTH	CLEAR HEIGHT	QTY.
3000mm	3000mm	02 NOS
5000mm	5000mm	01 NOS
3000mm	3000mm	02 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: MOTORISED ROLLING SHUTTER

	NAME	SIGN	DATE
DRAWN	SURAJ		17-08-2018
CHECK	PRADEEP		17-08-2018
APPRD.	R.D		17-08-2018

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -DEVI CONSTRUCTION

PROJECT -

SITE LOCATION - PUNE.

DWG. NO. : NIHVA/18-19/0111 | REV- 0

SCALE: NTS | WT: | SHEET: 01 OF 01