



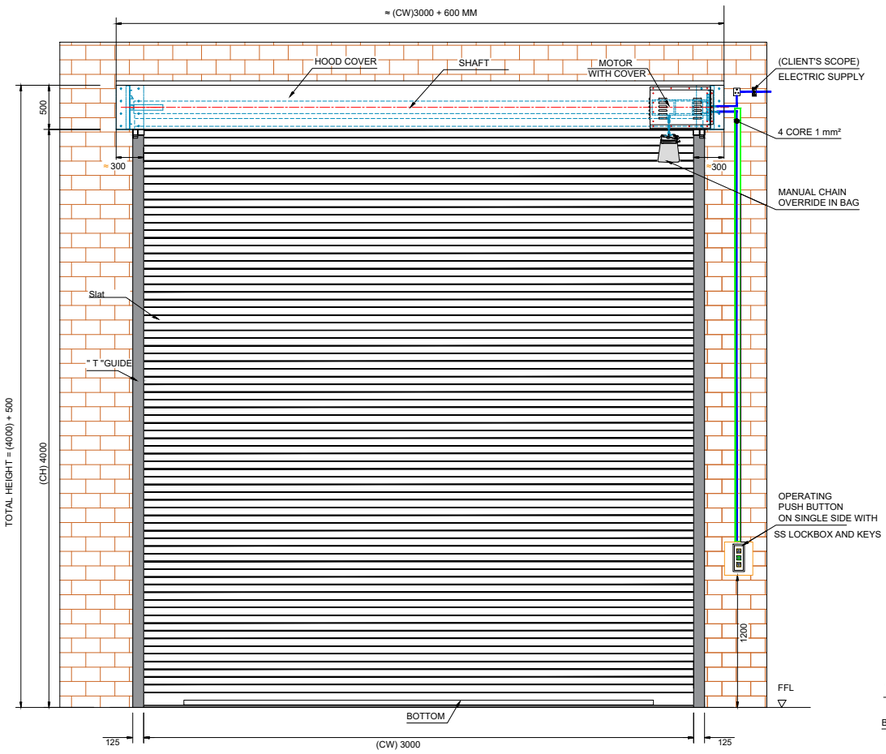

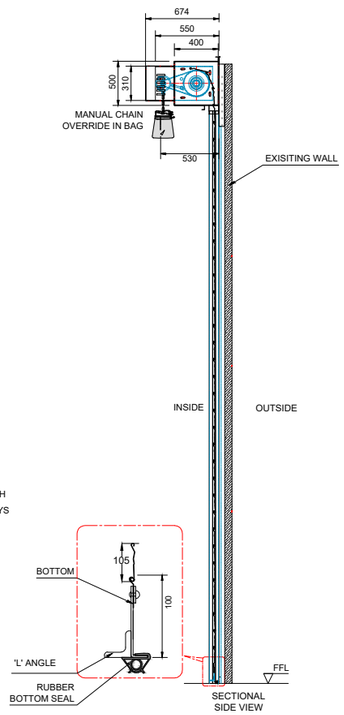

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE) SPROCKET CHAIN ARRANGEMENT.
2.	LOCATION AREA	INSIDE
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL+ON CONCRETE/STEEL&SIDE
4.	SLAT	CURVED 105 MM GI SHEET - 1.2 MM THK
5.	BOTTOM PROFILE	ALUMINIUM BOTTOM WITH EPDM BOTTOM RUBBER SEAL.
6.	GUIDE PROFILE	M.S." T " SHAPE 125 X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF MS SHEET THICKNESS 1.2 MM.
8.	COLOUR	RAL7016
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

R01 - ALL MENTIONED COMMENTS ARE INCORPORATED IN THE GA DRAWING

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3000 mm	4000 mm	04

Note :-

1. All Dimension are in mm

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	B.S.	16/07/2025	CLIENT - GS PEB & CIVIL WORK PVT. LTD.
CHECK & APPROVAL	V.T.	16/07/2025	PROJECT - MOTORISED ROLLING SHUTTER
			FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/GB/2411001 REV-00
			SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com