



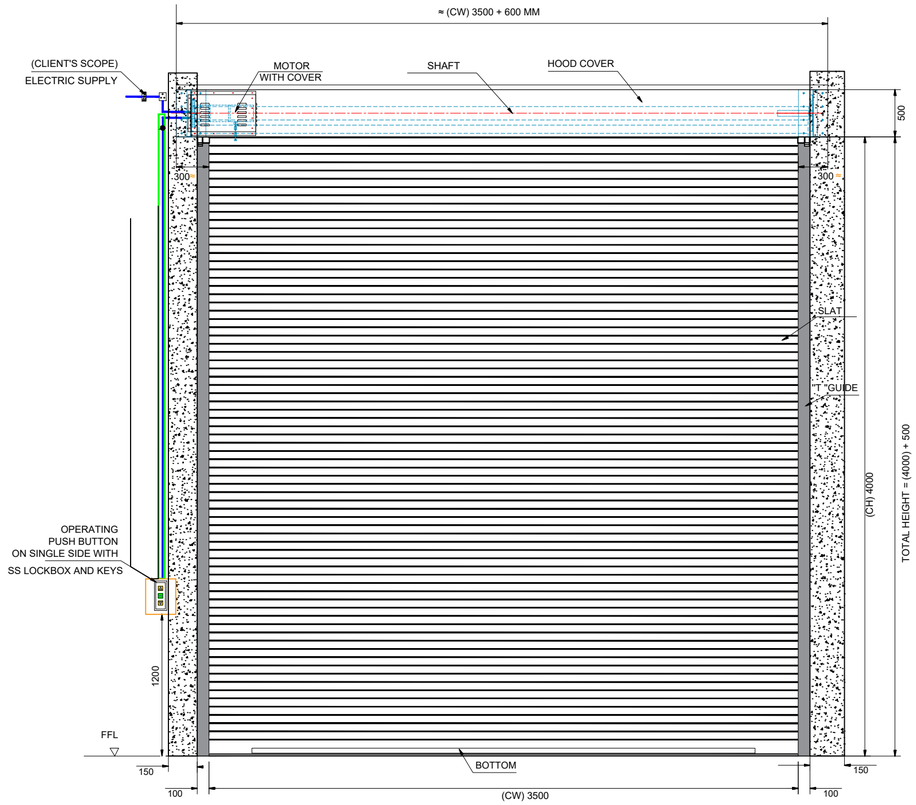

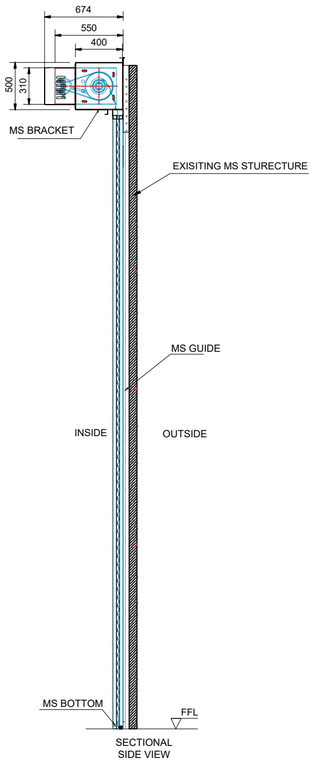

INSIDE ELEVATION

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorized Rolling Shutter (Direct Drive With CE Certificated)
2.	Location Area	Inside
3.	Mounting Surface	SHS 150 X150 MM
4.	Slat	AS PER NIHVA STD.
5.	Bottom Profile	MS Plate 100 x 2.5 mm thick with Angle Stiffner with rubber seal
6.	Guide Profile	M.S." T " Shape profile 100 x 3 mm Thk.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Surface finish	SYNTHETIC ENAMEL PAINT RAL SHADE 9002
9	Accessories	Push Button Single side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3500 mm	4000 mm	3

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	B.S.	13/02/2025	CLIENT - SMP INFRASTRUCTURE PVT. LTD.
CHECK	V.M.	13/02/2025	PROJECT - ROLLING SHUTTER
APPROVAL	V.T.	13/02/2025	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/SMP/250124 — REV-01
			SCALE: NTS — WT: — SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com