

EXPOSED SIDE

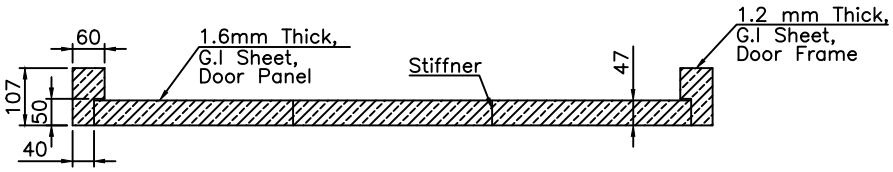

TOP VIEW
(SECTION 'X–X')

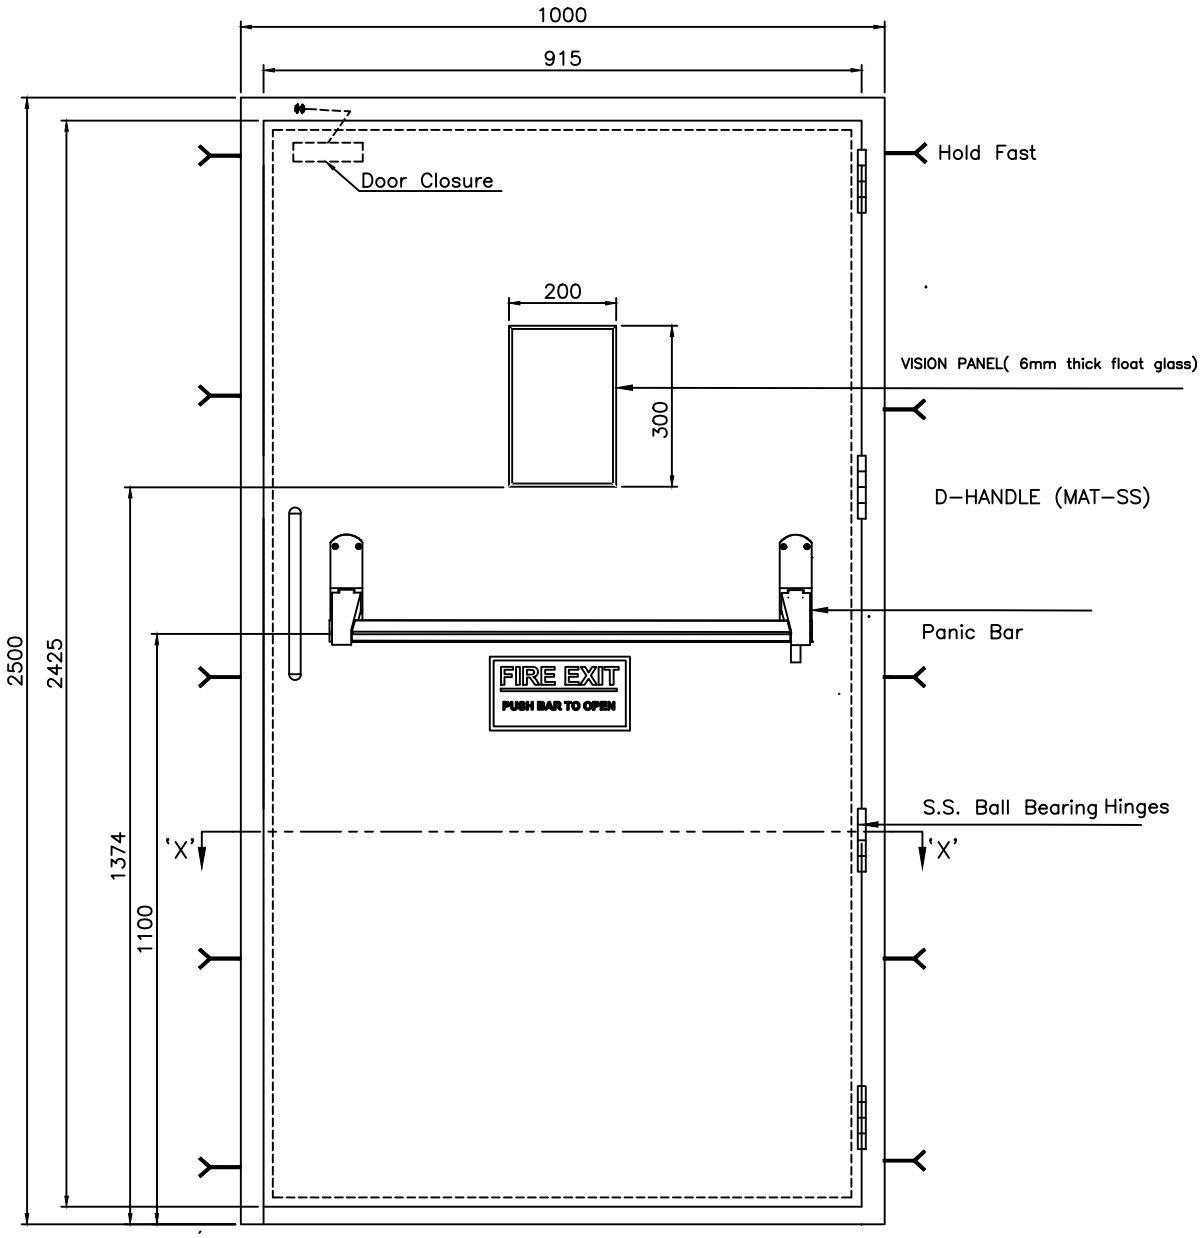

FRONT VIEW

TECHNICAL SPECIFICATION :

Sr. No	Specification	2 Hrs Fire Rated Single Leaf Door
1	Door Type	Fire Resistant Door Single / Double Leaf Hinge Type (2 Hours Fire Rated) 1.20 mm thick G.I. Sheet cladded 46mm thick shutter with infill Material Honeycomb complete with G.I. frame (Single Ribet – 100 x 57mm) made from 1.60mm thick G.I. Sheet & Fixing arrangements. Paint Finish.
2	Frame & Shutter Material	GI
3	Fastner	Anchor Fastner CSK Type with GI Plating Size : 8 mm x 80 mm with PVC Sleve
4	Door Closure	Heavy Duty Door Closer
5	Vision Panel	Vision Panel (200 x 300mm) 6 m thick fire rated glass - (Fire Door)
6	Accessories	Panic Exit Device for Single Leaf Door, External Trim Bar (Panic Latch)

SIZE:–

WIDTH	HEIGHT	QTY
1000	2500	1 No.

NOTE:– ALL DIMENSIONS ARE IN mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:– FIRE DOOR			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	DATE	SIGN
DRAWN	J.S.	17-01-2024	CLIENT –TATA MOTORS
CHECK	A.K.	17-01-2024	LOCATION – PUNE
APPRD.	V.T.	17-01-2024	PRODUCT – FIRE DOOR QTY:-14 NOS
ALL DIMENSION ARE IN mm			SCALE:NTS SCALE:– SHEET:01 OF 01

NIHVA TECHNOLOGIES PVT. LTD.
Tel : 020 66304033
Email:– info@nihva.com
Website:– www.nihva.com
If any queries contact : design1@nihva.com

DWG NO:–NIHVA/23-24/CLT/062 REV- 01