
A guide to preventative maintenance for Albany High Performance Doors

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

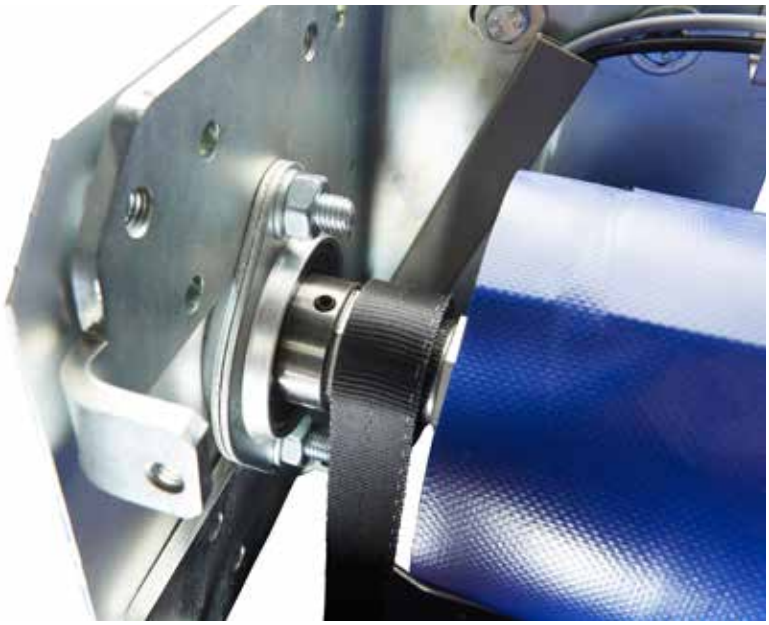

Top roll

What is the function?

- To carry the curtain
- A stiff top roll provides stability and prevents wrinkles on the curtain
- To roll up the curtain
- To secure the connection between the drive unit and the curtain
- To support the bearing (the connection between the side frame and the moving parts) which reduces the friction
- To stabilize the door between the side frames
- To activate additional systems (such as the movable top sealing and middle lock) on doors with a rigid door blade

What is the manufacturer's specification?

To make sure the manufacturer's specifications are observed, replace every:

- 500.000 cycles (flexible doors)
- 1.000.000 cycles (rigid doors)

How do they wear?

During the lifetime of the top roll there will be wear and tear due to:

- The bending of top roll due to the weight of the curtain and spring forces
- Movement and torque between the drive unit and the top roll may cause the feather key of the shaft wear out. This depends on the control system, and may cause increased acceleration forces
- Corrosion, dirt, force or cleaning agents may cause the bearings to wear
- There may be corrosion on the top roll or shafts

Chain drive

- Chain drive leads to higher torque
- Friction, abrasion and drag forces may cause the chain to wear
- Abrasion to the teeth on the chain sprockets

Can I also replace it earlier?

- Yes, if there is a moving noise coming from the bearings
- If bending is visible due to wrinkles which are appearing parallel coming from the middle on the curtain
- If there is rust on the bearings and shafts, or visible corrosion
- If there is contact corrosion between the motor and shafts
- If the chain is elongated
- If feather key groove is worn
- If grease comes out of bearing

What is the risk of not replacing?

When not following the manufacturer's specifications the customer is taking the responsibility for unintended breakdown, e.g.:

- A loose shaft will lead to a misalignment between the top roll, which will cause damage to the bearings
- A broken feather key could cause the bottom beam to fall down (on unbalanced doors) – risking accidents
- A broken bearing may cause the door to get stuck, with no movement possible
- A door will not move with a broken chain

Top reasons for preventive maintenance

- Keeps the warranty valid
- Prevents unexpected and expensive break-downs
- Prolongs lifetime
- Cost saving
- Minimises risk of personal injury
- Minimises energy loss
- Fulfills legal requirements
- Improves working environment

©ASSA ABLOY Entrance Systems AB/PL.MAP/DEU-EN-1.0/1504

ASSA ABLOY ENTRANCE SYSTEMS Maintenance & Modernization