

PROPOSED PLAN LAYOUT

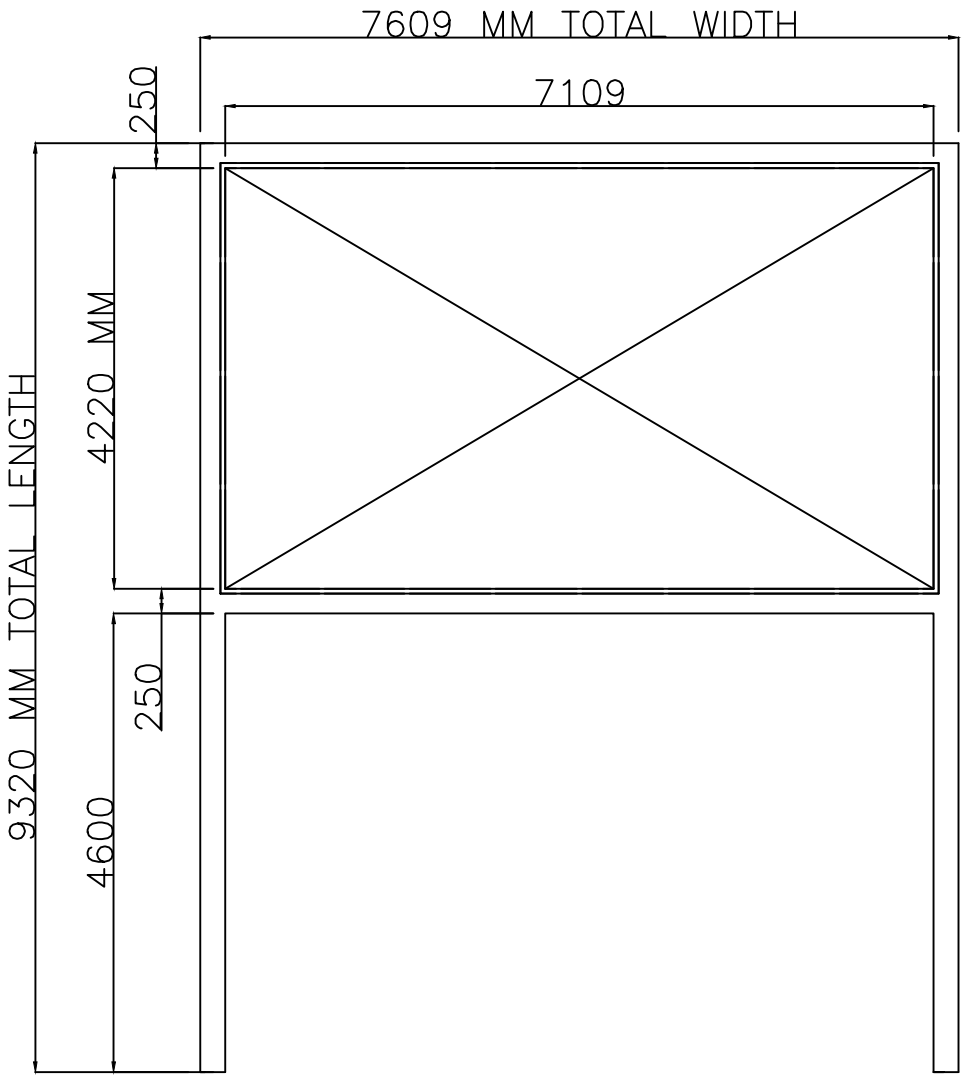

PROPOSED PLAN

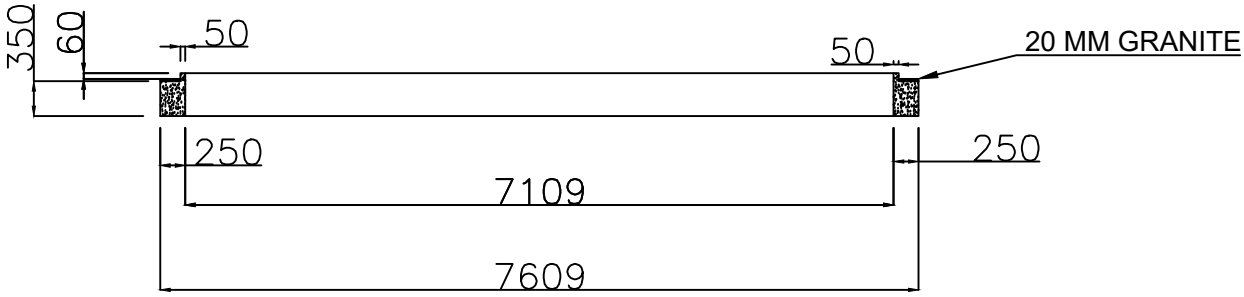

1. THE CIVIL STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE OF GRANITE 20MM FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 50MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. PROTECTIVE WALL OF SIZE 50MM X 60 MM AS SHOWN IN DRAWING MUST BE PROVIDED
6. AL PROFILE - POWDER COATED 60X63 MM
7. GASKET - EPDM
8. MOTOR - ITALIAN/GERMAN MAKE
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK IS IN CLIENT SCOPE.
11. ELECTRICAL CONNECTION 5 AMP, 220V SINGLE PHASE TO BE PROVIDED FOR MOTER OPERATION

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: PROPOSED PLAN LAYOUT (IN CLIENT SCOPE)	NAME	SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD.
DRAWN	H.B.		10.05.23	CLIENT - DR. BALAJI GOPALAN
CHECK	P.M.		10.05.23	LOCATION - PUNE_IN
APPRD.	V.T.		10.05.23	PRODUCT - RETRACTABLE ROOF
If any queries contact : projectsautomation@nihva.com				NIHVA\22-23\02XX / REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS / SHEET: 01 OF 01