NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

ACO SELF®Euroline



Euroline Polymer concrete drainage channels

- **Euroline 100**
- **Euroline 150**

ACO

ACO Self® Channel -high strength domestic and residential water drainage system.



If rain water is not properly diverted, it can cause structural damage inside and outside the residence. With the ACO Self® system, ACO provides drainage channels for all types of terrain and the most varied requirements. The ACO Self® modular system offers more than a drainage function, combining functionality with the highest level of design. One channel for any requirement with a range of grating designs to suit the design need.

Modular System


ONE CHANNEL for each application. The ACO Self® drainage was specially developed for private applications and combines best quality with high level of design. Gratings are car drivable and suitable for all drainage applications around the house.



The ACO Self® Euroline




Polymetric channel benefit

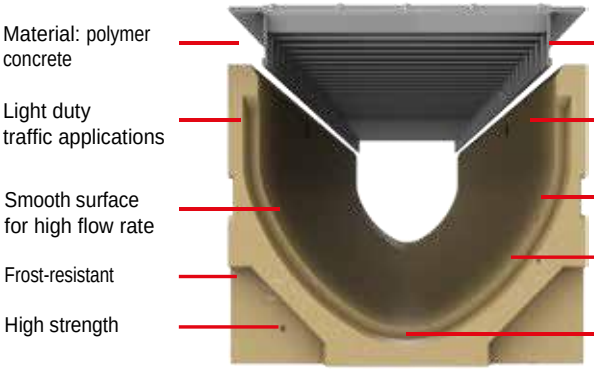

LoadClassupto250KN

The ACO Self® Euroline product range

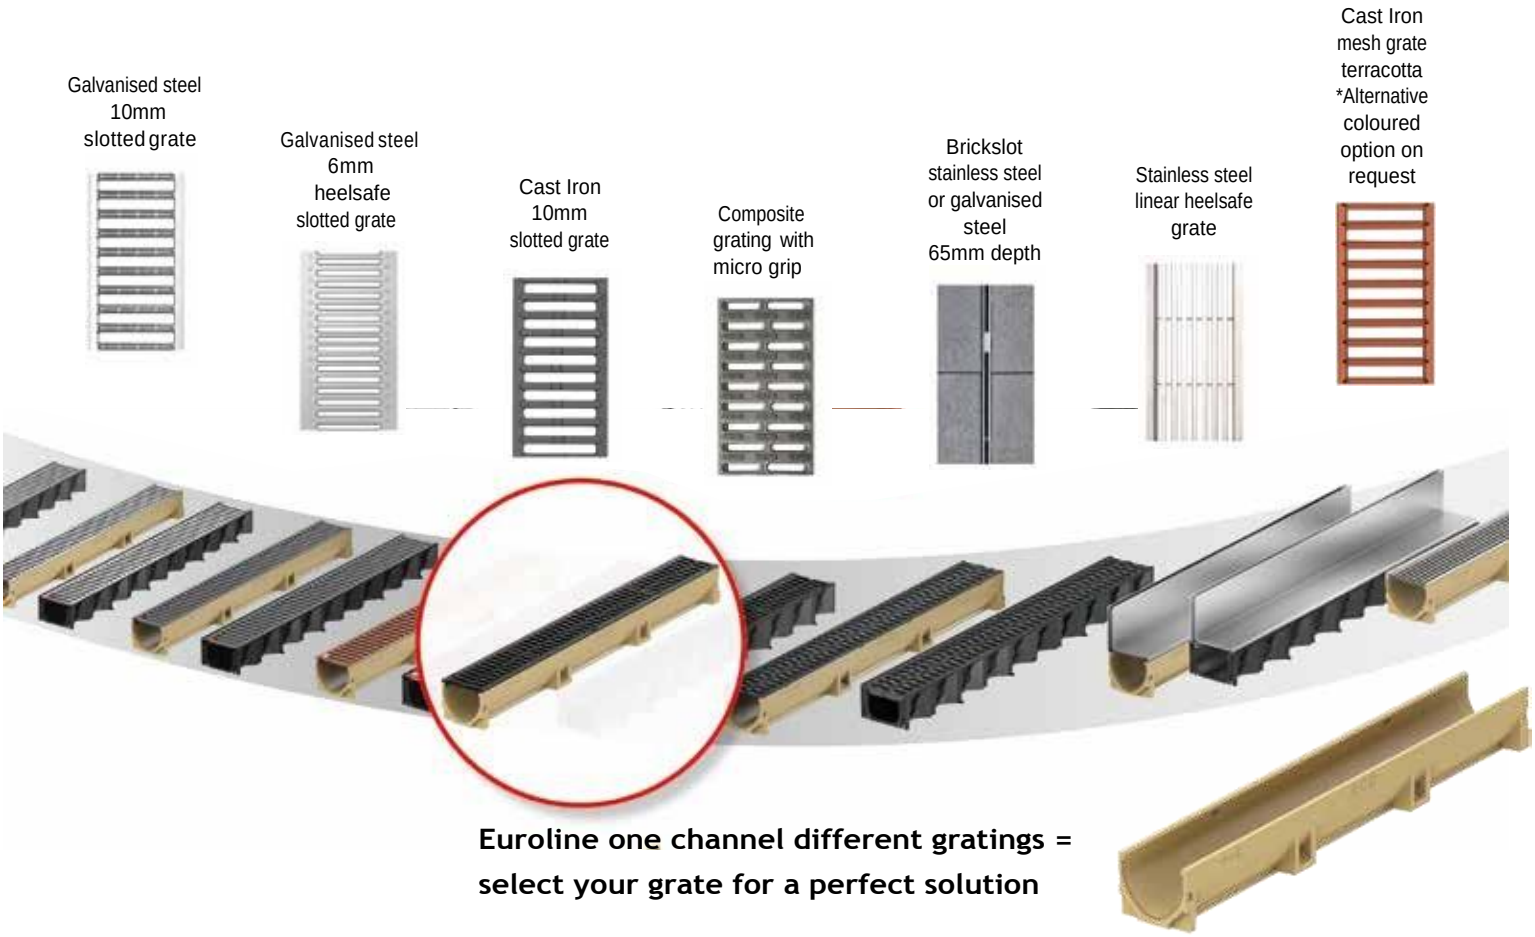


Euroline one channel different gratings = select your grate for a perfect solution




Product information

- In polymer concrete
- V-shape section
- Resistant to freeze thaw attack
- Low weight and high compressive strength
- High hydraulic capacity and flow rate
- No bar locking device
- Intergated locking system
- Foul air trap


Connection: Type 1 Connecting to the drainage system through a sump unit,
including a sludge collection bucket and optional foul air trap

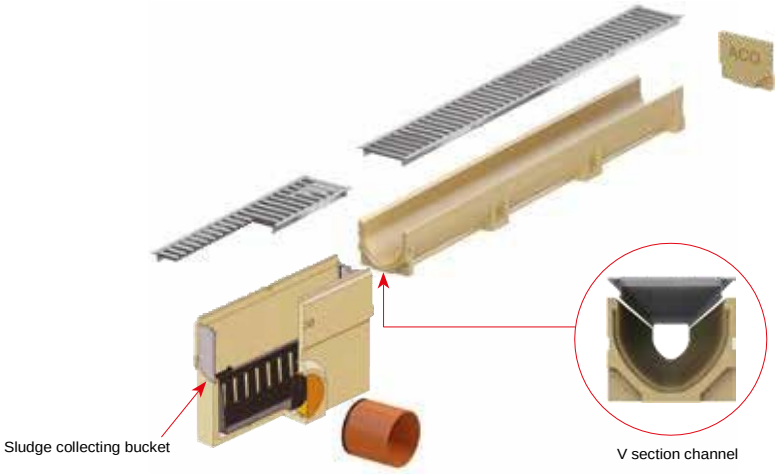

Connection: Type 2
Connecting to the drainage system through the polymeric end cap with DN 100 outlet pipe fitting.

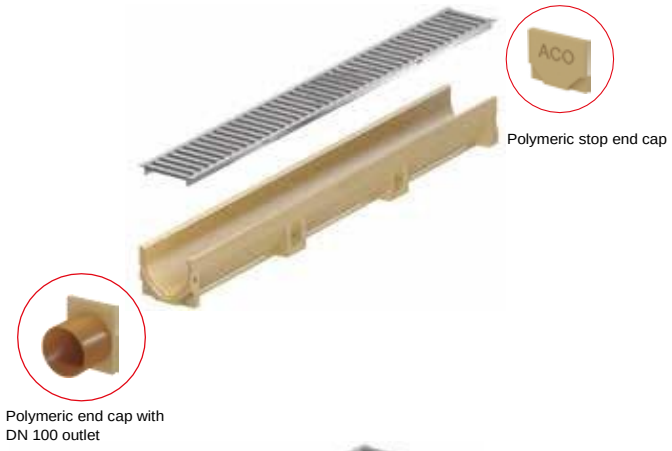



Connection: Type 3 Connecting to the drainage system through the preform channel
DN 100 knockout

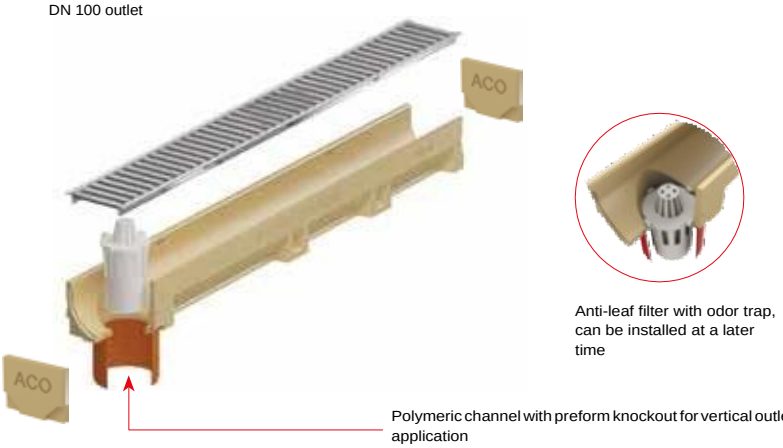


Euroline 100 channel body with preform DN100 knockout



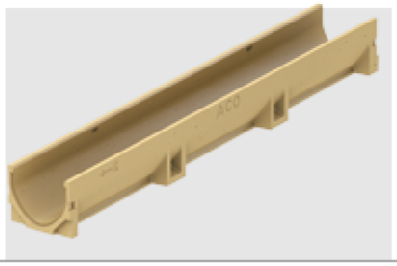


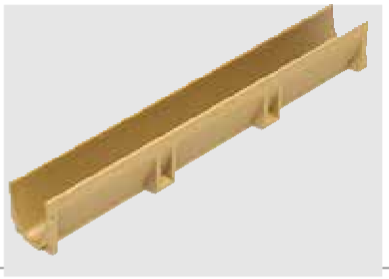


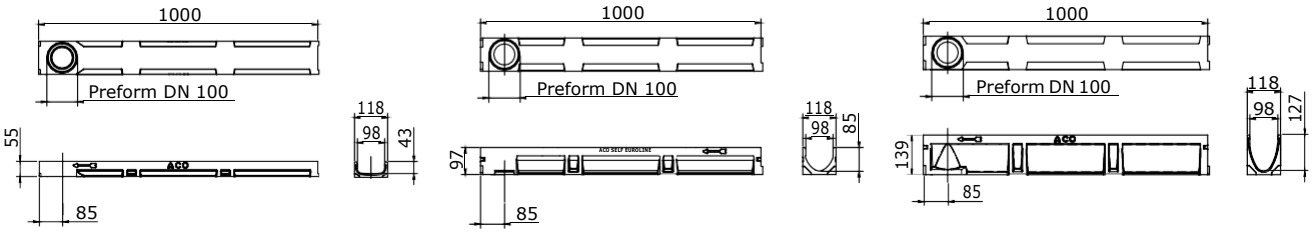

Length [mm]	Width overall [mm]	Depth overall [mm]	Weight [kg/pc]	Code
With DN 100 knockout				
1000	118	55	5,20	**810020**
1000	118	97	6,70	**810024**
1000	118	139	10,20	**810028**

Euroline 150 channel body with preform DN150 knockout

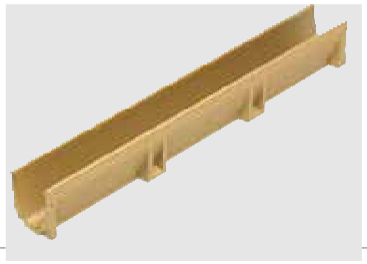

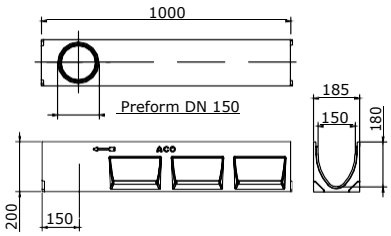

Length [mm]	Width overall [mm]	Depth overall [mm]	Weight [kg/pc]	Code
1000	185	200	22,00	**850025**



Euroline 100 accessories					
Image	**Description**	**Type**	**Depth overall [mm]**	**Weight [kg/pc]**	**Code**
	Combined end cap		55	0,35	**810200**
			97	0,45	**38504**
			139	0,80	**810202**
	End cap with DN 100 outlet	Ø 60 mm	55	0,50	**810201**
		Ø 110 mm	97	0,60	**38505**
		Ø 110 mm	139	0,95	**810203**
	Foul air trap			0,12	**01666**
	Leave catcher			0.02	**319282**
	Euroline Sump Unit (Including sludge basket)	Ø 110 mm	300mm	10,5	**810040**

Euroline 150 accessories					
Description		**Type**	**Material**	**Depth [mm]**	**Code**
	End cap	Combined end cap	Polymer concrete	200	**850230**
	End cap with pipe	DN 150	Polymer concrete	200	**850240**



Euroline 100 gratings						
Image	**Description**	**Length [mm]**	**Width overall [mm]**	**Slot/mesh [mm]**	**Weight [kg/pc]**	**Code**
	Galvanized steel slot grating	1000	118	10	1,40	**38516**
	Heelsafe galvanized steel slot grating	1000	118	6	1,70	**810102**
	Cast iron slot grating load class 125 kN (medium duty)	500	118	10	2,50	**38512**
	Polypropylen with Microgrip	1000	118	8	0,63	**319250**

Linear triangle bar grating (Heelsafe)						
Image	**Description**	**Length [mm]**	**Width overall [mm]**	**Slot/mesh [mm]**	**Weight [kg/pc]**	**Code**
	Stainless steel	1000	118	6	3,15	**10323**
		500	118	6	1,5	**10324**

Euroline 150 gratings						
Image	**Description**	**Length [mm]**	**Width overall [mm]**	**Slot/mesh [mm]**	**Weight [kg/pc]**	**Code**
	Galvanized steel mesh grating	1000	181	30 x 10	5,00	**850104**
	Cast iron slot grating	500	181	147 x 18	4,80	**850106**













Visit our website www.aco.co.za for more drainage solutions

Multiline — Higher Hydrolic Capacity



Monoblock — Monocast Solution with Integrated Grate

