NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PROJECT PROPOSAL

NIHVA TECHNOLOGIES PVT. LTD.

187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

Customer Name	**IKEA**
Project Name	**NIHVA Dock Leveler**
Project Location	Pune
Contact Person Name	Mr. Kciran Kulkari.
Email Id	kciran.kulkarnii@ikea.com
Contact Number	8291152611
Date	07.08.2019


Contact Person: Ms. Varsha
Mob No.: 8551091333
Email id: support@nihva.com
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA – Dock Leveler

Purpose of Dock Leveler: –

A **dock leveler** is a piece of equipment that is usually either mounted to the **dock** face or recessed into a pit at a loading **dock** door allowing movement of industrial vehicles between a building and a transport vehicle.

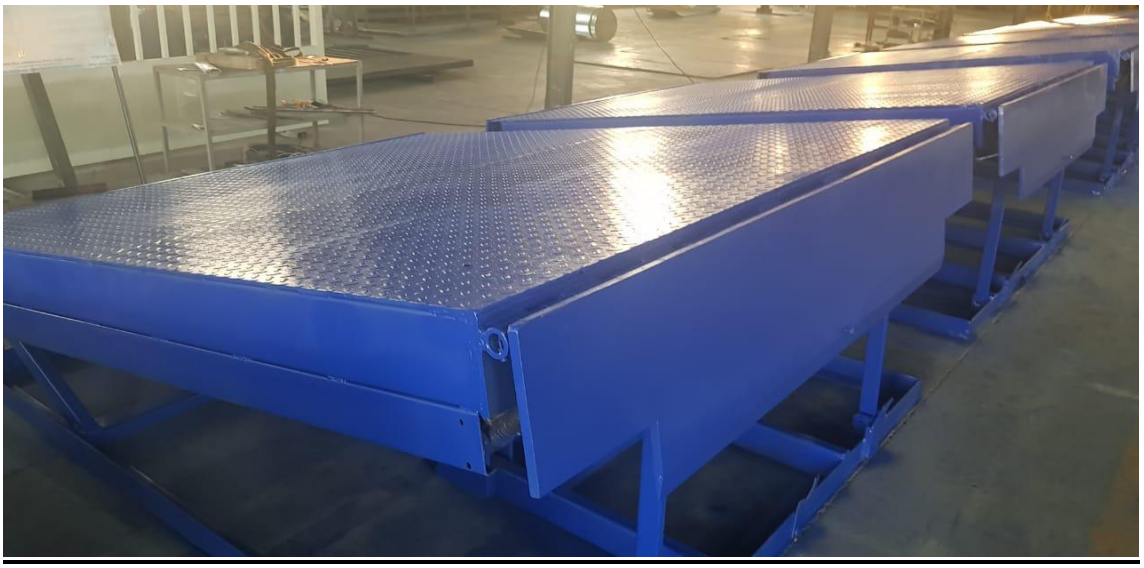

INTRODUCTION: -

Dock Leveler is a height-adjustable platform **used** to ensure smooth transition between **dock** and truck which helps prevent forklift accidents that can cause serious injuries and forklift damages. It is usually comprised of a simple metal plate that is raised from a stowed position and then lowered onto the back of the truck.
NIHVA Dock Levelers are designed according to Indian Conditions. Dock Levelers not only help into loading & Unloading of vehicles easily but also reducing the dispatch time of vehicles significantly


Key Features of NIHVA Dock Levelers are as follows:

1. **Robust Design, safe operations & long-term reliability**
2. **Total Control on basic hydraulic like pressure & flow**
3. **Velocity Safety Stops**
4. **Simple electric panel with push button**
5. **Priority to safe working operations**
6. **Long excellent stability**
7. **Consistency in working performance**

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Few Images of NIHVA Dock Leveler:



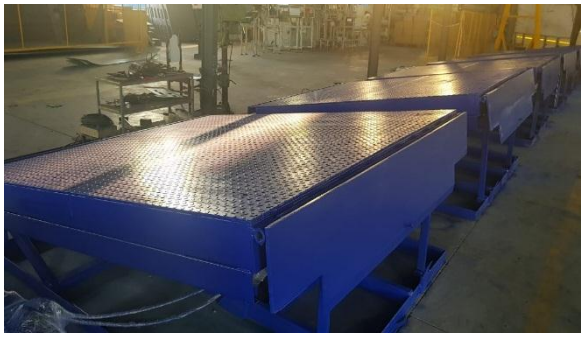

Technical Specifications: -

Sr. No.	Description	Specifications
1	Capacity	9 Ton
2	Dock operation mode	AC power pack hydraulically operated
3	Lip operation mode	Hydraulic
4	Operation control	Through panel
5	Loading platform height from road	4 Ft
6	Travel above & below dock level	(+) 300 / (-) 200 mm
7	Platform Size (W x L)	**2200 mm x 2450 mm**
8	Lip size (W x L)	2200 x 400 mm
9	Dock Leveller (Shut) Height	480 mm
10	Working length	2850 mm
11	Overall length	2200mm x 2450mm + Lip Length (400mm)
12	Deck Plate (MS Chequered)	8 mm Thick
13	Lip Plate	16 mm Thick
14	Maximum slope can be achieved	10%
15	Clear Pit dimensions (W x L x D)	(W) 2250 mm x (L) 2500 mm x (D) 485 mm
16	Driver type	Direct by electric Motor
17	Motor Ratings	1 H.P Motor
18	Pump design flow	2.8 LPM
19	Pump pressure	120 bar Operating 200 bar Max.
20	Safety valve set pressure	120 Kg/cm²
21	Pump Type	Gear
22	No Of Deck cylinder	2 Nos
23	Lip Cylinder	1 No
24	Dock Bumper	Included - 1 pair

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Commercial Offer: -

Sr. No	Description	Qty in no's	Rate In INR	Net Amount
1	**NIHVA Dock Leveler (Supply + Installation + Transportation)** **2 cylinders for Deck & 1 cylinder for LIP Operator by Standard Control Panel (Deck Up / Down / Lip Up / Down) Rubber Bumpers.** **Size: (W) 2200 mm X (H) 2450 mm** **Capacity 9 Ton**	3	2,10,000	6,30,000
2	**Traffic Signaling System = Rs. 10,000** **Flashing Light as per Agreement = Rs. 7,000** **(Rs 10,000 – Rs 7,000) = Rs 3,000**	3	3,000	9,000
			Total	**6,39,000**

Terms and Conditions: -

1. **Price** : FOR SIte
2. **P & F** : Nil
3. **Freight Notes** : Mentioned as above
4. **Delivery** : Within 6 - 7 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval.
5. **Payment Terms** : 80% advance along with confirmed purchase order balance before dispatch.
6. **Insurance** : Extra as applicable.
7. **GST** : Extra @ 18%.
8. **Validity** : 15 days from date of quotation.
9. **Warranty** : 12 months from date of supply.

Please feel free to Contact Mr. Vijay Tarak on 0855109333 for any further Clarification in this Concern.

Ms. Varsha
Mob No.: 8551091333
Email id: support@nihva.com
Web: http://www.nihva.com