Preventive Maintenance Manufacturer's Specification

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

Enhance the durability of your High Performance Door Electric


Key benefit

Safety

Cost-Savings


Just as a car's tires and oil must be changed regularly, your Albany High Performance Doors have key components that periodically need replacing. Whether it's a spring or a sprocket, changing them before they break is an integral part of Pro-Active Care.

We at ASSA ABLOY Entrance Systems believe in Pro-Active Care. Letting us replace components before they fail keeps your warranty valid and your equipment compliant with regulations. Even more importantly, it ensures the safety and functionality of your equipment, so that you can avoid accidents and losses in productivity.

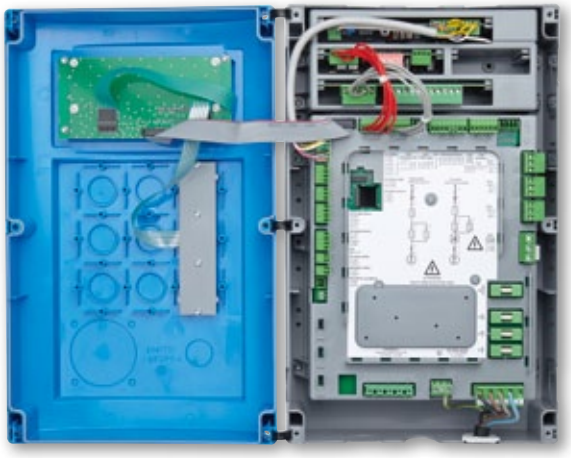







Instructions for table usage:

Qualified person
The manufacturer's recommendation for exchange of components is subject to the findings of a qualified person. We strongly recommend that inspections are performed by a qualified person within the recommended service intervals (according to the user manual of the door).

Recommendations for exchange
The manufacturer's recommendations are based on a door with average size, installed under regular environmental conditions. Doors dimensioned close to maximum size of the door type or doors installed in harsh environmental conditions, need particular observation by a qualified person as the recommended intervals might be shorter.

Components specified as wear and tear related do not have a recommended exchange interval, indications for exchange or wear can be derived from the corresponding fact sheets.

Subject to technical modifications without notice. Errors and omissions excepted.

ASSA ABLOY ENTRANCE SYSTEMS
Maintenance & Modernization

Preventive Maintenance
Manufacturer's Specification

ASSA ABLOY

Electric

Product group	Description	250.000 cycles or 5 years	250.000 cycles or 10 years	500.000 cycles or 5 years	1.000.000 cycles or 10 years	2.500.000 cycles or 10 years	2.500.000 cycles or 5 years	5.000.000 cycles or 10 years	10 years	5 years
Actuator electrical	Infrared sensor					●				
	Laserscanner						●			
	Light curtain					●				
	Loop detector					●				
	Photocell					●				
	Radar					●				
	Radar/IR					●				
	Radio receiver								●	
Actuator mechanical	Mushroom button				●					
	Pull switch				●					
	Push button				●					
	Radio transmitter				●					
	Key switch								●	
Control system	ACS50 Control box				●					
	ACS50 Control system				●					
	Brake rectifier	●								
	Brake relais	●								
	MCS control system		●							
	Safety system			●						
	Loop detector					●				
	MCC control system							●		
	MCC Extension card							●		
	MCC Interface card							●		
	Radio receiver								●	
	ACS50 Function card								●	
	Bus Module								●	
	Carrier board								●	
	Control unit								●	
	Function card								●	
	MCC Combibox									●
	MCC Display									●
	MCC EMC Filter								●	
	MCC Function card								●	
	Power supply								●	
	UPS battery									●
	UPS system								●	
Signal	Traffic light								●	
	LED Stripe								●	

≤150.000 cycles: ±10.000 cycles; >150.000 cycles: ±20.000 cycles
≤5 years: ±6 months; >5 years: ±1 year

© ASSA ABLOY Entrance Systems AB PL.MAN/Electric/DEU.EN-1.1/1504 / 64 100 484 Technical data subject to change without notice

ASSA ABLOY ENTRANCE SYSTEMS
Maintenance & Modernization