


THIS DRAWING IS THE PROPERTY OF NIHVA TECHNOLOGIES PVT. LTD AND MUST BE RETURNED ON REQUEST. THIS IS SUBMITTED AS CONFIDENTIAL INFORMATION IN CONNECTION WITH OUR ENQUIRY/TENDER/ORDER OR CONTRACT. THIS MUST NOT BE USED COPIED OR LENT FOR ANY PURPOSE WITHOUT OUR AUTHORITY IN WRITTING

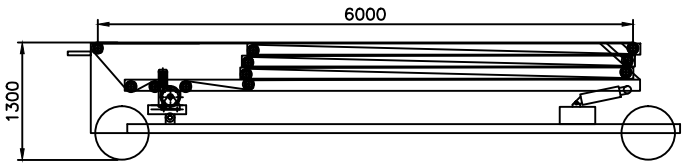


CONVEYOR IN BACK LENGTH POSITION

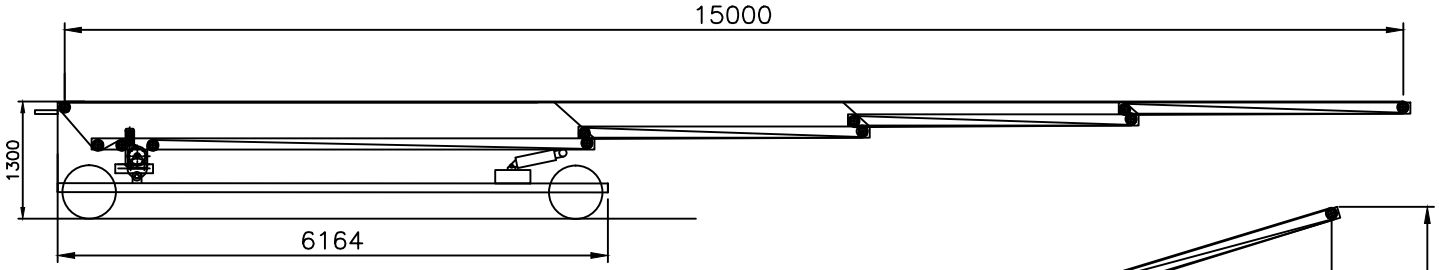

CONVEYOR IN STRETCHING POSITION

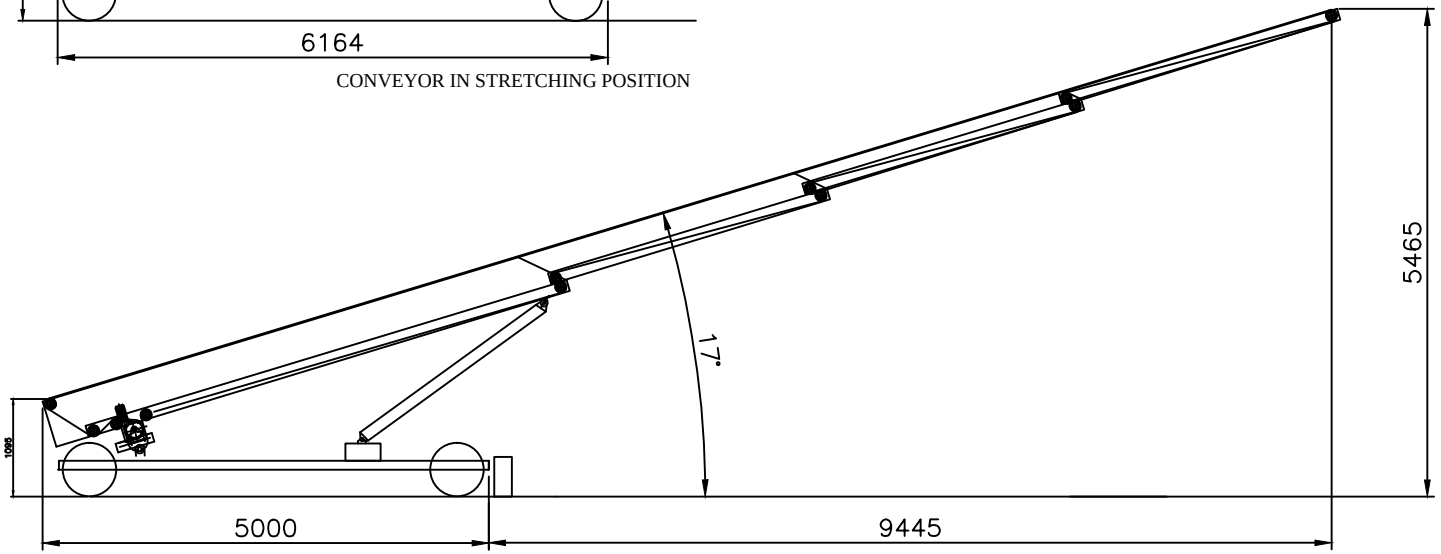

CONVEYOR IN LIFTING POSITION

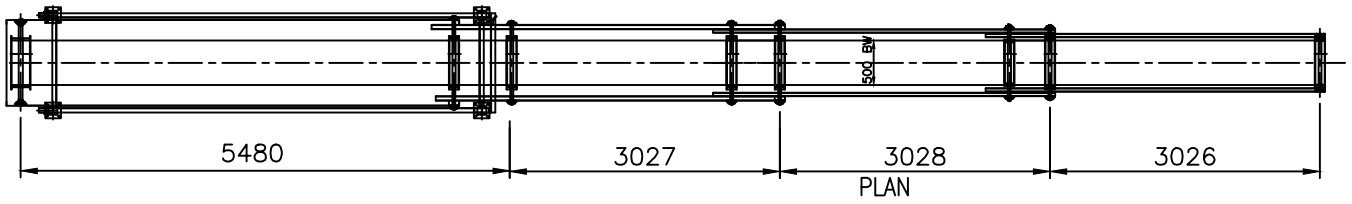

PLAN

TECHNICAL SPECIFICATIONS OF TELESCOPIC CONVEYOR		
S.NO.	DESCRIPTION	TELESCOPIC CONVEYOR
1	TYPE	: TELESCOPIC CONVEYOR
2	MATERIAL CARRIED	: CARTON BOX/ GUMMY BAGS
3	WEIGHT	: 50 KGS
4	CENTRES	: 15.0 MTRs.
5	LIFT	: 5.4 MTRs.
6	SPEED	: 30 MPM
7	MOTOR	: 3.0 HP/1440 RPM ;1 HP/1440 RPM
	MAKE	: KIRLOSKAR/ABB/SIEMENS
8	GEAR BOX	: AS-45 ; 73 RPM ; W-75 ; 17 RPM
	MAKE	: BONFIGLIOLI
9	BELT	: 500 MM WIDE, ROUGH TOP BELT
10	HEAD DRUM DIA / LENGTH	: 140 MM / 600 MM LONG
	SHAFT DIA	: 50 MM
	BEARING DIA	: 40 MM / UCFL-208
11	TAIL DRUM DIA / LENGTH	: 140 MM / 600 MM LONG
	SHAFT DIA	: 40 MM
	BEARING DIA	: 30 MM / SABB
12	BEND DRUM DIA / LENGTH	: 88.9 MM / 600 MM LONG
	SHAFT DIA	: 30 MM
	BEARING DIA	: 25 MM / SABB
13	RETURN IDLER / TYPE	: FLAT, SINGLE ROLL 42.4 MM/600 MM LONG
14	CONVEYOR FRAME TYPE	: DELUXE TYPE
15	TAKE-UP	: SCREW TAKE-UP
16	WHEELS	: 4 NOs. HEAVY DUTY CASTOR WHEELS PROV.
17	LIFTING MECHANISM	: HYDRAULIC CYLINDER. POWER PACK 1.0 HP
18	EXTENSION MECHANISM	: CHAIN & SPROCKET
19	GUIDE ROLLER	: PROVIDED
20	ELECTRICAL CONTROL PANEL,	: PROVIDED
21	MATERIAL OF CONSTRUCTION	: MS
22	PAINTING	: POWDER COATING SIEMENS GRAY
23	QUANTITY	: 1 NO.

NOTE :- ALL DIMENSIONS ARE IN "MM"

NIHVA TECHNOLOGIES PVT. LTD
TEL : 020 66304033
Email: supportautomation@nihva.com
Website :- www.nihva.com

CUSTOMER			
TITLE	G.A.OF TELESCOPIC CONVEYOR		
DESIGN	P.S		SCALE
DRAWN	SVS		NIL
CHECKED	P.R.K	DATE	12.09.2015
APPROVED	P.S	REV.	A
DWG. NO.	MCPL/5204	REF DEG.	