




PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

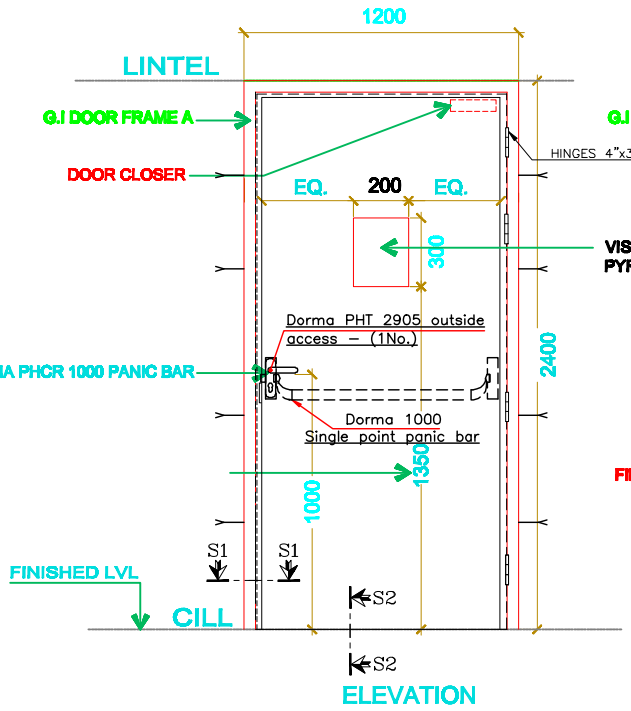


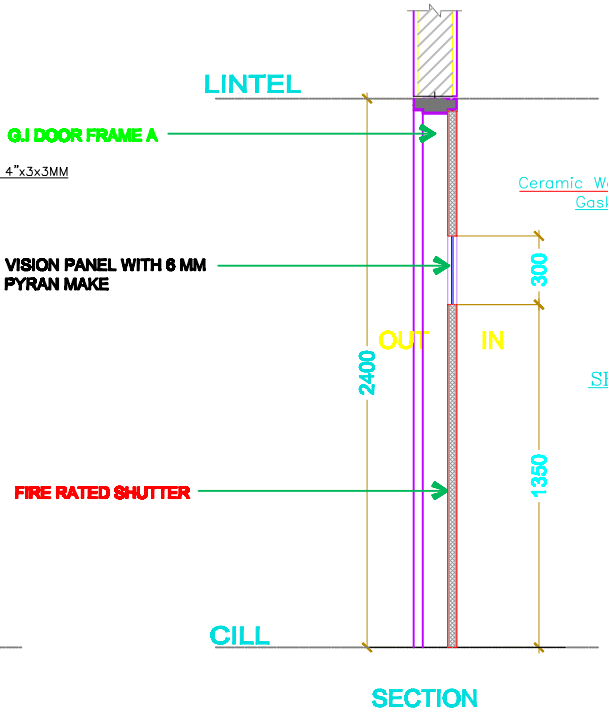



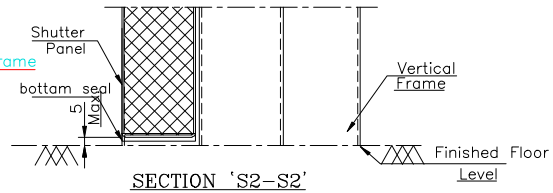

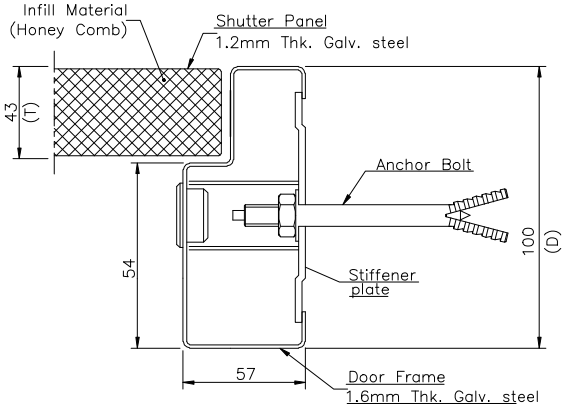

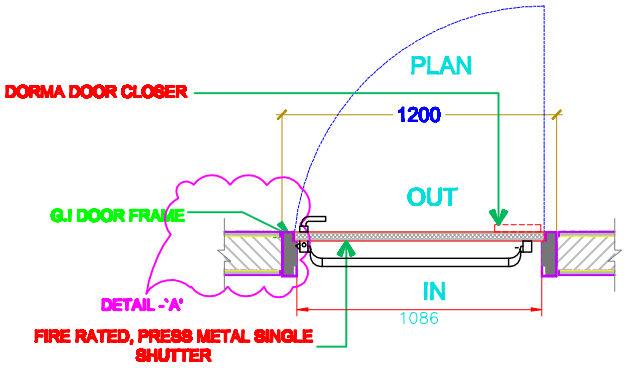

Size 1200X2400
2hr,FIRE RATED DOOR

COLOUR :- P. O. RED

NOTES :–

1) Door Frame shall be fabricated from 1.2mmThk. Glav. steel sheets to form a double rebate profile & fixed to wall with Anchor bolts.
2) Shutter Panels shall be fabricated from 0.8mmThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm.& shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. of SS Ball Bearing Butt Hinges shall be provided on each Shutter Size 4"x3"X3mm––
4) Dorma PHCR 1000 Panic bar with Outsie trim
5) Dorma Door Closer

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern

TITLE

FIRE DOOR

ALL DIMENSION ARE IN mm

CLIENT APPROVAL

	SIGN	DATE
DRAWN	ABHIJIT	10/04/15
CHECK	ANIL	10/04/15
REV.	02	
APPRD.		
MFG		
Ref. No.		

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY
PVT. LTD. PUNE
Tel : 020 66304033
Email:– info@nihva.com
Website:– www.nihva.com

CLIENT – NYATI ENGINEERS & CONSULTANT

PROJECT –ELRING KLINGER

SITE –PLOT NO.G2, MIDC, RANJANGAON

DWG. NO. – NIHVA/15–16/005

SCALE: 01 | WT: | SHEET: 01OF01

If any queries contact : projects@nihva.com

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT