


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2200	2450	540	400
PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	
	2240	2500	540	


NOTE : ALL DIMENSIONS ARE IN mm

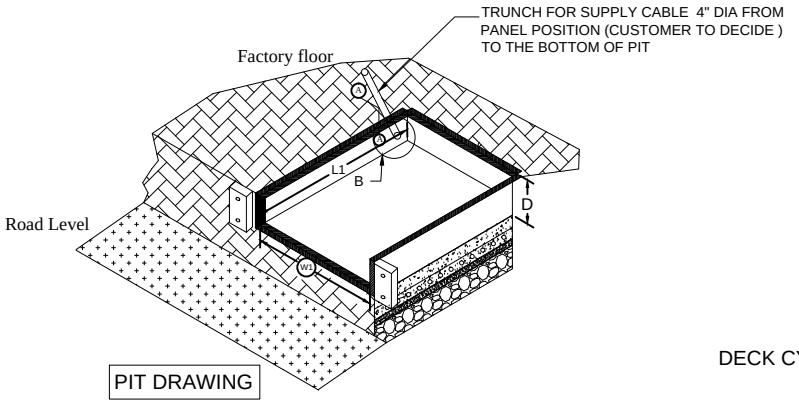


PIT DRAWING

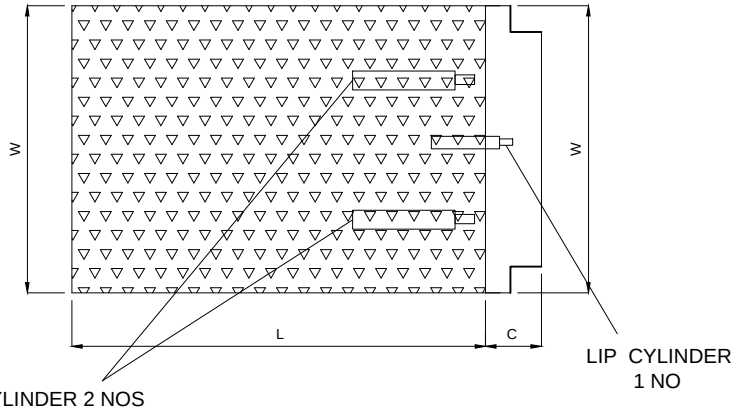





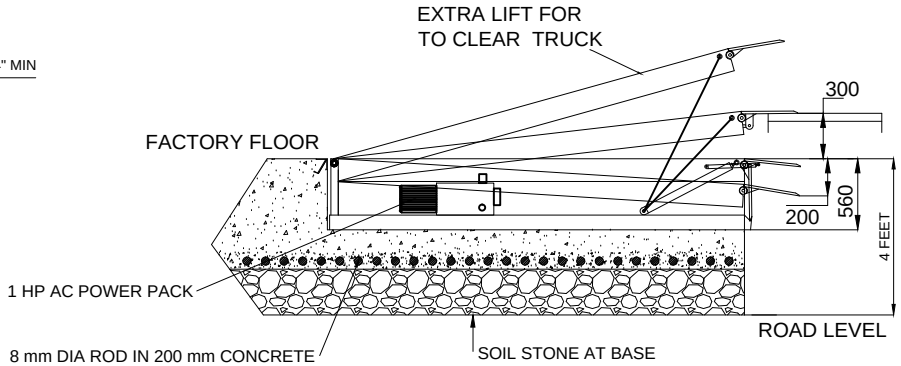

DOCK LEVELER-

IMP NOTE: -

1.CAPACITY : 9 TON (QTY : 11 NOS).
2.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
3.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.
4.PROPER DRAINAGE SHOULD BE DONE.
5.TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM).
6.LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING.
7.MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED).
8.FABRICATION TOLERANCE WILL BE +/- 10 MM.

CLIENT APPORVAL-				NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com	
		DATE	SIGN.		
DRAWN	P.A	21.01.2019		CLIENT - IKEA	
CHECKED	V.T	21.01.2019		PROJECT -	
APPROVED				LOCATION - CHAKAN_PHASE_III	
ALL DIMENSION ARE IN mm				DWG. NO. - NIHVA/18-19/0242	REV:- 00
If any queries contact : design@nihva.com					