



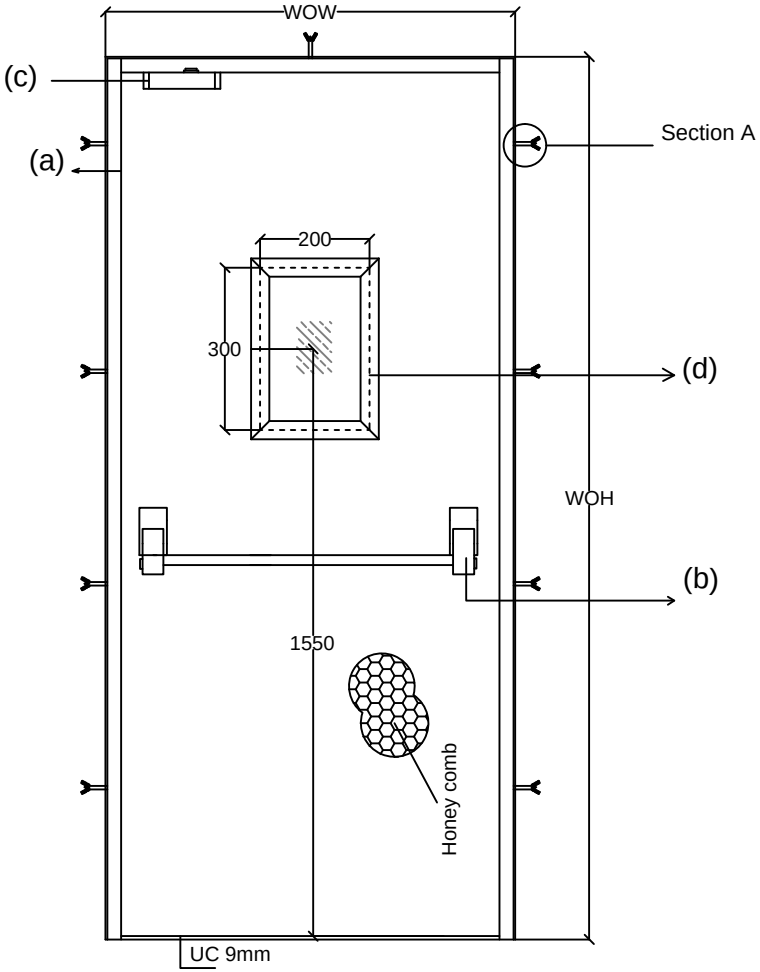


Inside Elevation



Top View

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

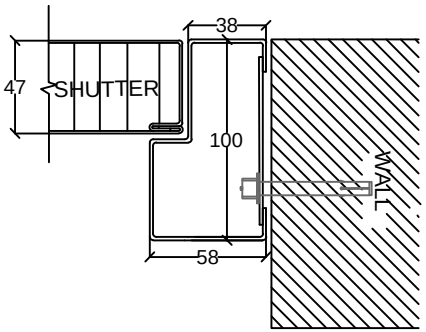

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm

(b) LOCK : Panic Bar
External trim

(c) DOOR CLOSER

(d) GLASS : 1No. Clear fire Vision Glass size 200x300mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

DOOR TYPE	WOW	WOH	TYPE 3	TYPE 4	TOTAL
2 HOURS FIRE RATED FIRE EXIT DOOR	1113	2380	1	3	4
	1000	2100		1	1
FIRE EXIT DOOR	1113	2380	4	6	10

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	22/03/16	
CHECK	ANIL	22/03/16	
REV.	00		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - INDOSPACE
PROJECT -
SITE - CHAKAN
DWG. NO. - NIHVA/15-16/249
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com