

PROPOSED PLAN LAYOUT

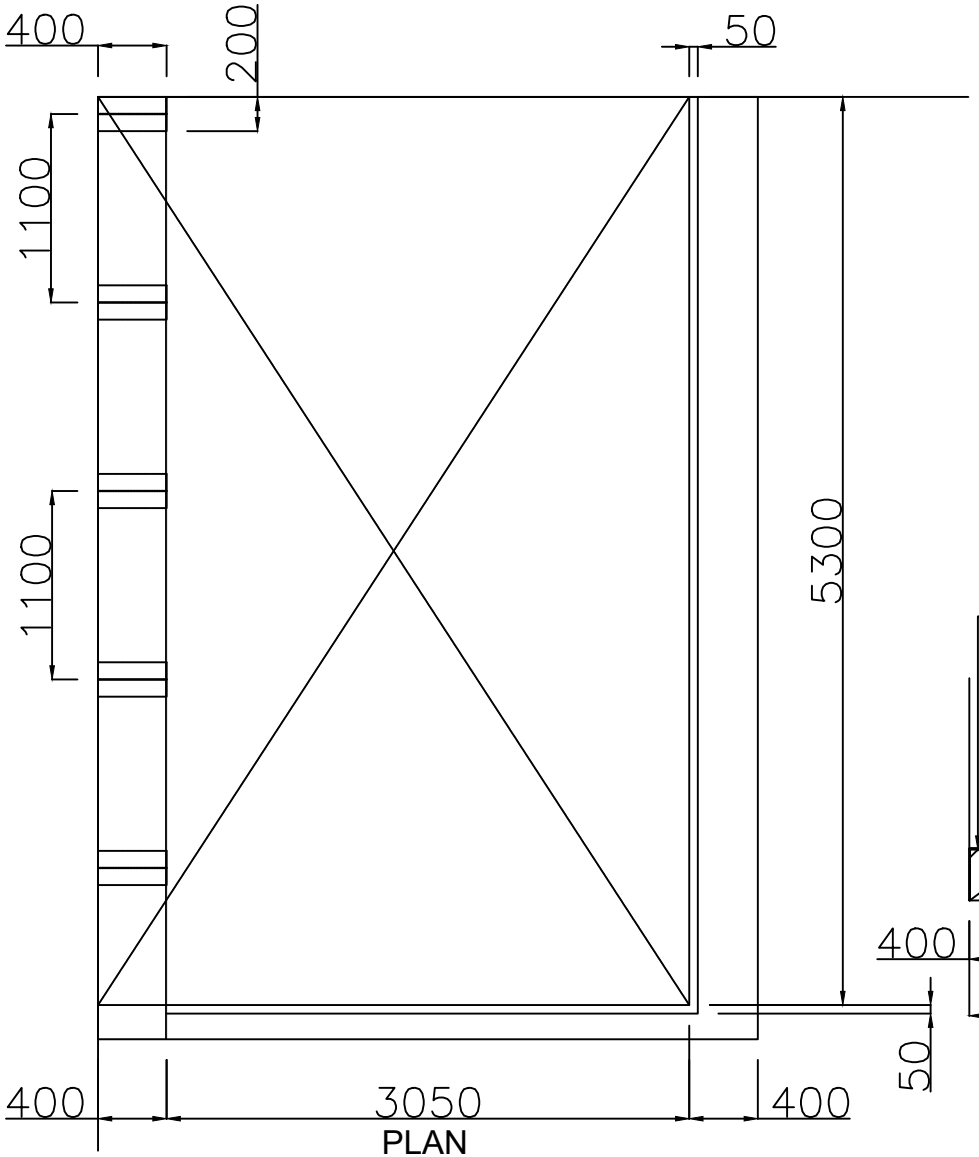

PLAN

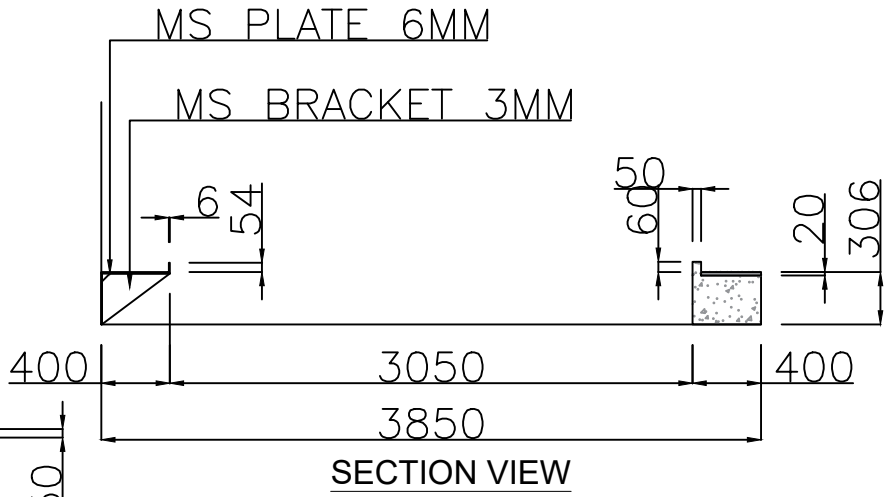

SECTION VIEW

1. THE STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR FOR PROPER FASTENING OF ROOF.
2. WALL MOUNT BRACKET TO BE FIXED FOR MOUNTING TRACKS WITH 6MM PLATE ON TOP.
3. TOP SURFACE SHOULD BE OF GRANITE 20MM FOR SMOOTH FUNCTIONING OF ROOF TOWARDS CONCRETE SIDE.
4. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
5. GRADIENT OF 50MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
6. AL PROFILE - POWDER COATED 60X63 MM
7. GASKET - EPDM
8. MOTOR - ITALIAN/GERMAN MAKE
9. ELECTRICAL REQUIREMENT - 220V 5AMP SINGLE PHASE CONNECTION.
10. ALL DIMENSION IN MM.