




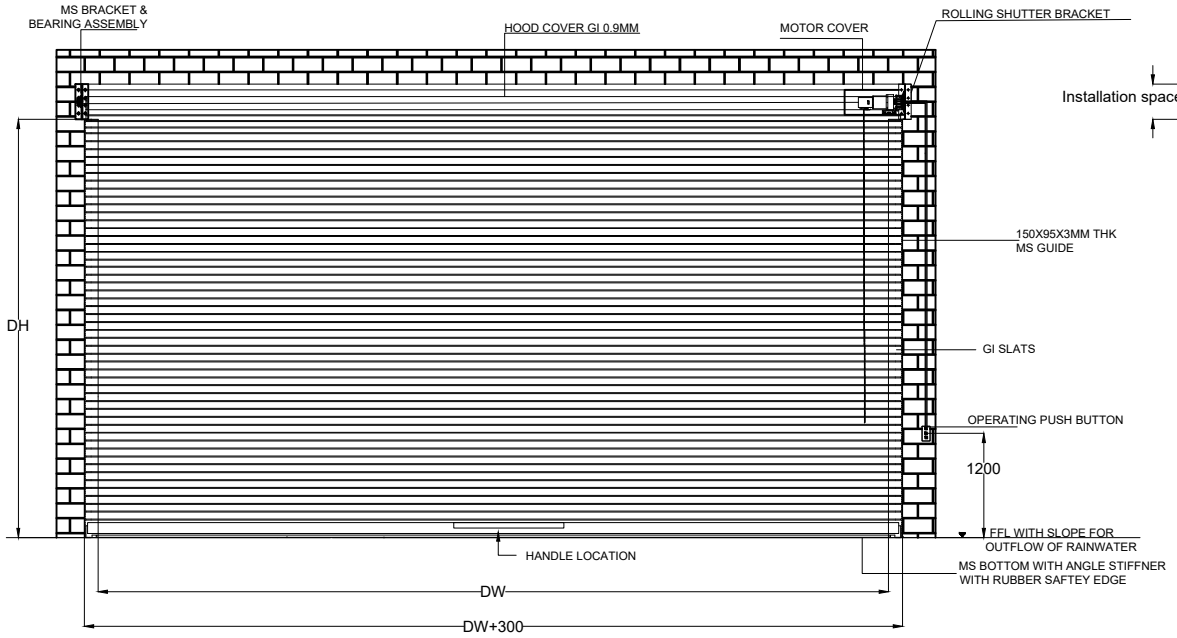


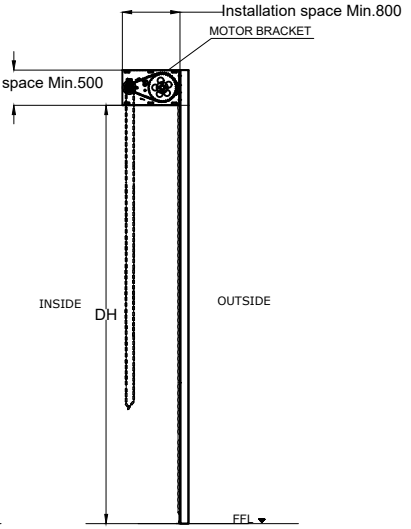

**SIDE VIEW**

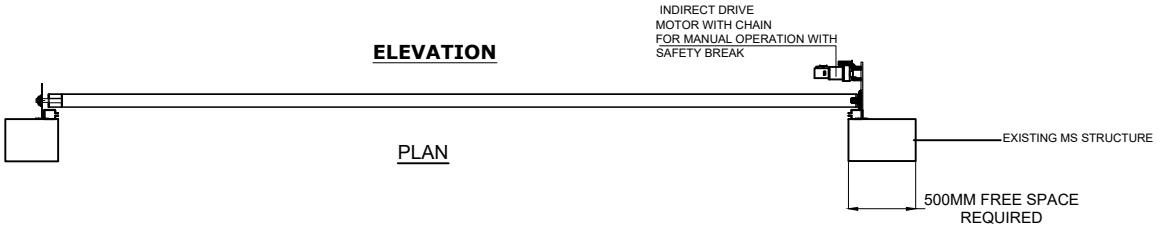


**ELEVATION**

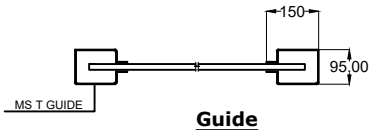PLAN




**Guide**

## TECHNICAL SPECIFICATION:-

| Sr .No. | Specification | Details |
|---|---|---|
| 1 | Description & Drive | GI 1.2mm Single Skin Motor Opearated Rolling Shutter |
| 2 | Motor | Jielong Make 3 Phase Indirect Drive With Chain For Manual Operating |
| 3 | Guide | T Guide 150 x 95 x 3 mm Thk |
| 4 | Bottom Profile | M. S. Plate 100 mm x 2.5 mm thick with angle stiffener (25 x 25 x 5 mm) |
| 5 | Mounting Location area | Inside area / Outside area |
| 6 | Mounting Surface | Structure Mounting |
| 7 | Curtain panel | 75mm wide- Curved Profile 1.2mm thick GI |
| 8 | Hood Cover | Made of GI Sheet Thickness 0.9 mm |
| 9 | Surface finish | As per Client Requirement |

## SIZE:-

| DW | DH | QTY |
|---|---|---|
| 8500 | 4500 | 1 No. |

## NOTE:-

1. All dimensions are in MM
2. Required civil work will be in client scope
3. Required MS structure mounting will be in cllient scope

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT - Ingersoll Rand .Ltd

PROJECT - Motorised Rolling Shutter (Indirect Drive)

| | NAME | DATE |
|---|---|---|
| DRAWN | S.J | 28/12/2023 |
| CHECK | A.K | 28/12/2023 |
| APPRD | V.T | 28/12/2023 |

SITE -

DWG. NO. -NIHVA/SO/23-24/058 REV.00

SCALE: 01 WT: SHEET: 01 OF 01

If any queries contact : design1@nihva.com