



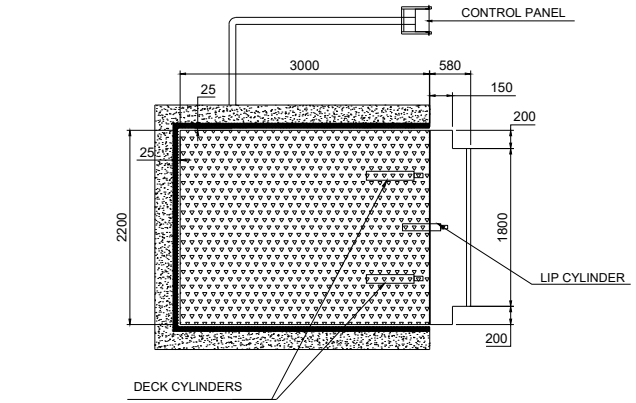


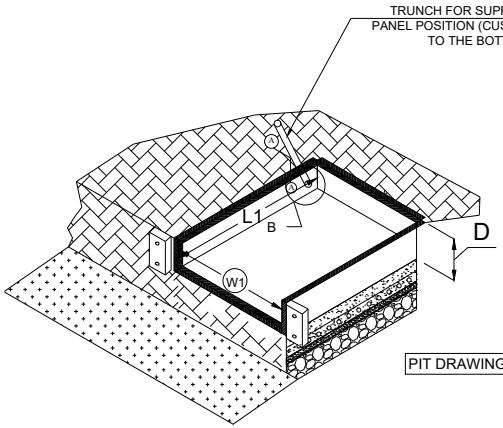

PIT DRAWING

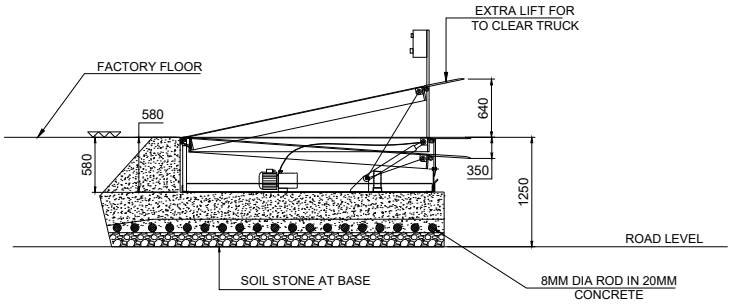



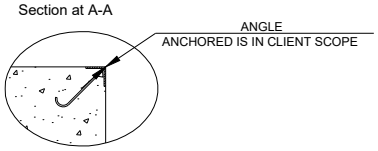

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	CAPACITY	6 TON
2.	DOCK OPERATION MODE	HYDRAULIC OPERATED
3.	LIP OPERATION MODE	HYDRAULIC
4.	LIP SIZE	2200X580 MM
5.	SHUT HEIGHT	580 MM
6.	PLATFORM SHEET THICKNESS	8 MM
7.	LIP SHEET THICKNESS	14 MM
8.	RAL COLOUR	GREY , RAL 7015 LIP: ORANGE, RAL 2000

DOCK LEVLLER SIZES :-

Capacity:- 6 TON

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	QTY
	2200	3000	580	580	10
PIT DIMENSION	2250	3050	580		

NOTE :

MAXIMUM NON-SLIP SLOPE RECOMMENDED BY EN 1398:12.5%(1:8) IS THE UPPER LIMIT REFERENCED FOR SAFE OPERATION(ACTUAL USABLE SLOPE DEPENDS ON VEHICLE TYPE). TYPICAL RECOMMENDED SLOPES FOR EQUIPMENT : PALLET JACK - 3-4 % ,ELECTRIC FORKLIFT UP TO -10% , INTERNAL COMBUSTION FORKLIFT UP TO -12.5% .

SPECIAL INSTRUCTION'S :

ROAD LEVEL HEIGHT DEPENDS VEHICLE TYPE -
LOWER HEIGHT OF VEHICLE - 1250 MM
HIGHEST HEIGHT OF VEHICLE - 1350 MM

TITLE - DOOR AUTOMATION

PROJECT NAME - SIGWERK

	NAME	SIGNATURE	DATE
DRAWN	B.S.		13/02/2026
CHK'D	V.T.		13/02/2026
APPV'D	V.T.		13/02/2026

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

PRODUCT - DOCK LEVLLER

PROJECT NO - REVISION - 00

SITE LOCATION -BHIWANDI WEIGHT - 1200 KG

MATERIAL - MS QTY - 10

PROJECTION METHOD

SCALE :

SHEET 1 OF 1