




MODEL : SKB–G65
THICKNESS 3mm
GALVANIZED STEEL GUIDE RAIL



MODEL : SKB–T120
FIRE RATED BOTTOM BAR




MODEL : SKB–A7
SHUTTER SLAT




PUSH BUTTON

SHUTTER TYPE	SKB 2 HOURS FIRE RATED ROLLER SHUTTER
SHUTTER SLATS	SKB–A7 SLATS
SLATS FINISHING	POWDER COATED TO SKB STANDARD RAL COLOUR
GUIDE RAIL	GALVANIZED STEEL SKB–G65
GUIDE RAIL FINISHING	POWDER COATED TO SKB STANDARD RAL COLOUR
BOTTOM BAR	SKB–T120 GALVANIZED STEEL WITH L–ANGLE BOTTOM BAR
BOTTOM BAR FINISHING	POWDER COATED TO SKB STANDARD RAL COLOUR
BOX DESIGN	MILD STEEL SECTION FRAME DESIGN
BOX & CASING COVER	0.8MM GALVANIZED STEEL
FINISHING OF COVER	POWDER COATED TO SKB STANDARD RAL COLOUR
OPERATION	SKB500KG MOTORISED WITH MANUAL OVERRIDE CHAIN
MOTOR POWER SOURCE	230 VOLTS, 1 PHASE, 50 Hz.
FIRE MODE	THERMAL FUSSIBLE LINK WILL AUTO CLOSE BY GRAVITY FORCE
	WHEN ROOM TEMPERATURE RISES UP TO 71 C
	EMERGENCY RELEASE SYSTEM READY TO RECEIVE 24VDC–ER–A AUTO RESET
	FIRE SIGNAL 24VDC 400mA BY CONTRACTOR
ADDITIONAL ITEM	.
	.


SHUTTER NO.	LOCATION	GRID LINE	CLEAR WIDTH	CLEAR HEIGHT	MOTOR POSITION	QTY	FINISH COLOR
A7–1	. .	.	4350 mm	3350 mm	RIGHT	1	.

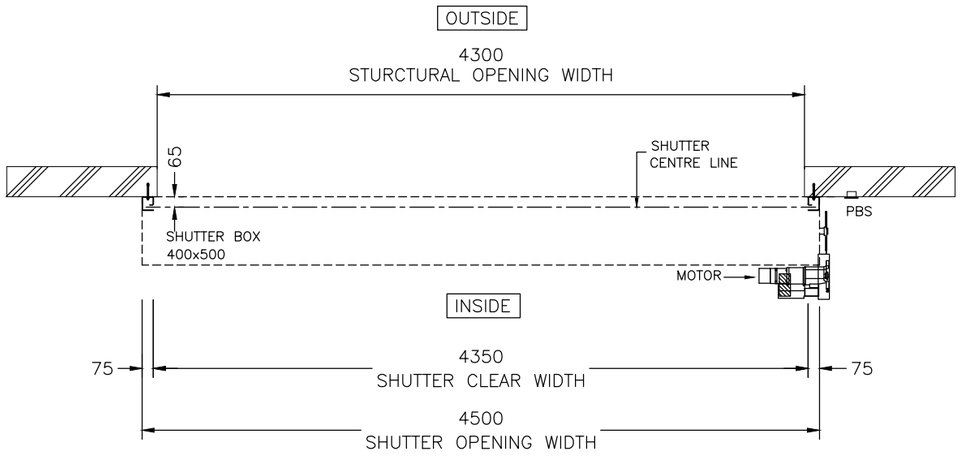


PLAN VIEW

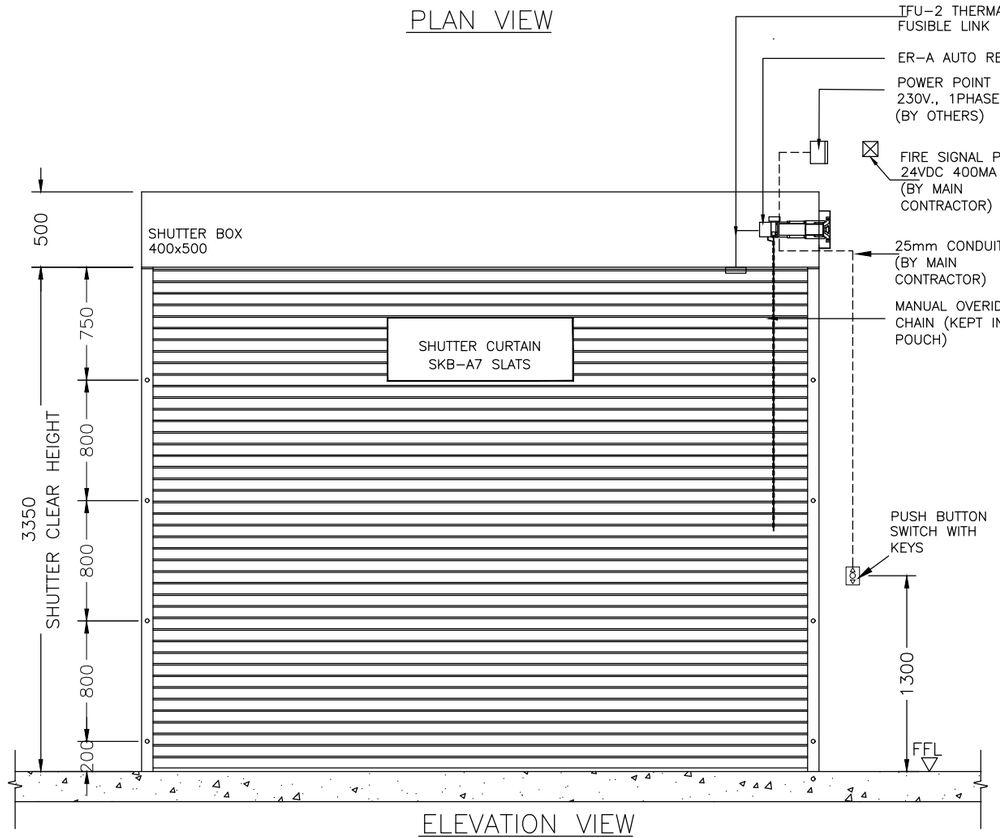

ELEVATION VIEW

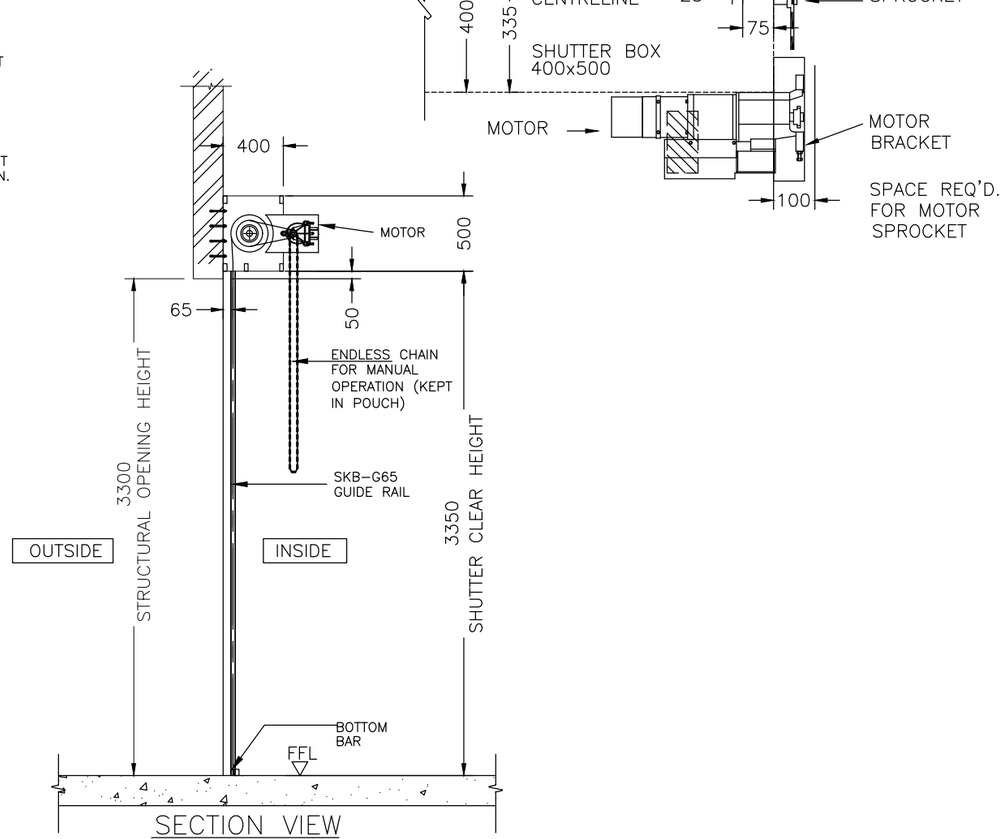

SECTION VIEW

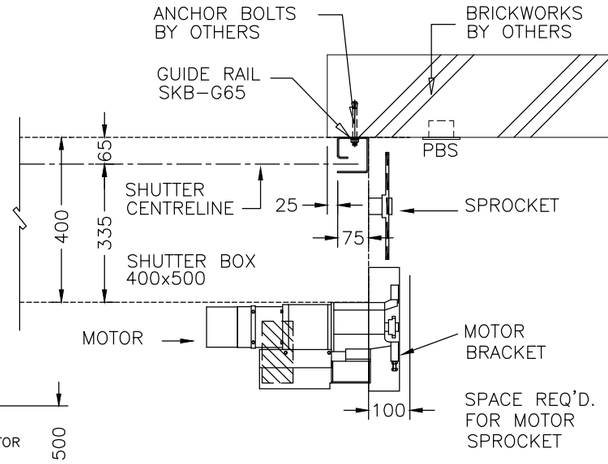

SHOP DRAWING

NO.	DATE:	AMENDMENTS:
01	16.01.18	GUIDE RAIL PROFILE CHANGE

DEVELOPER / LANDOWNER:

REV.

ARCHITECTURAL:

CONSULTANT :

MAIN CONTRACTOR :

INSTALLER :

MANUFACTURER:

NIHVA

NIHVA TECHNOLOGIES
PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

PROJECT TITLE:

SKF

DRAWING TITLE:

SKB 2HRS FIRE RATED A7 SINGLE SKIN ROLLER SHUTTER

DRAWN : A.D	CHECKED : LYN	DRAWING NO. :	REV :
SCALE : N.T.S	DATE : 13–7–2019	NIHVA–FRS1–002–V01.DWG	0