


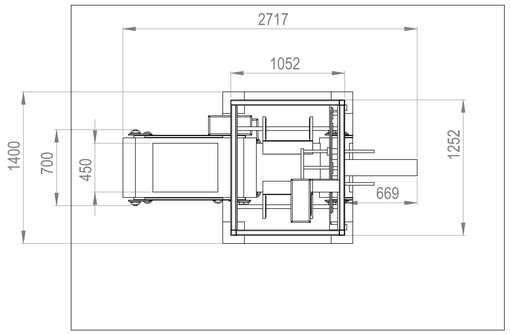


T.V. OF LAYOUT

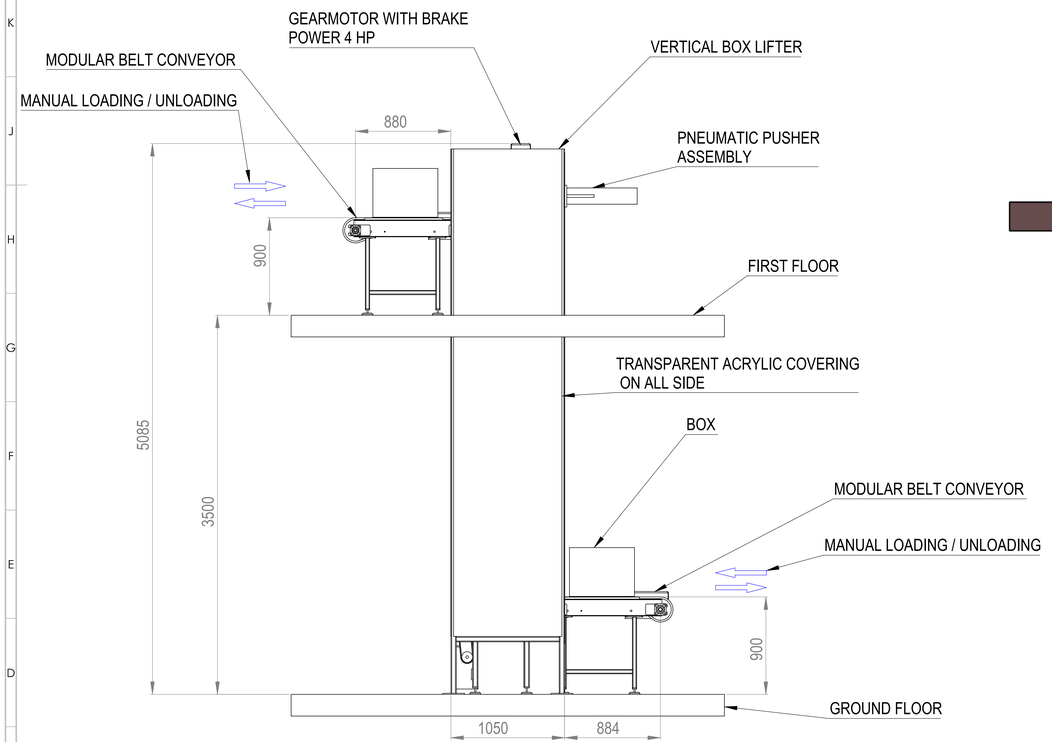

F.V. OF LAYOUT

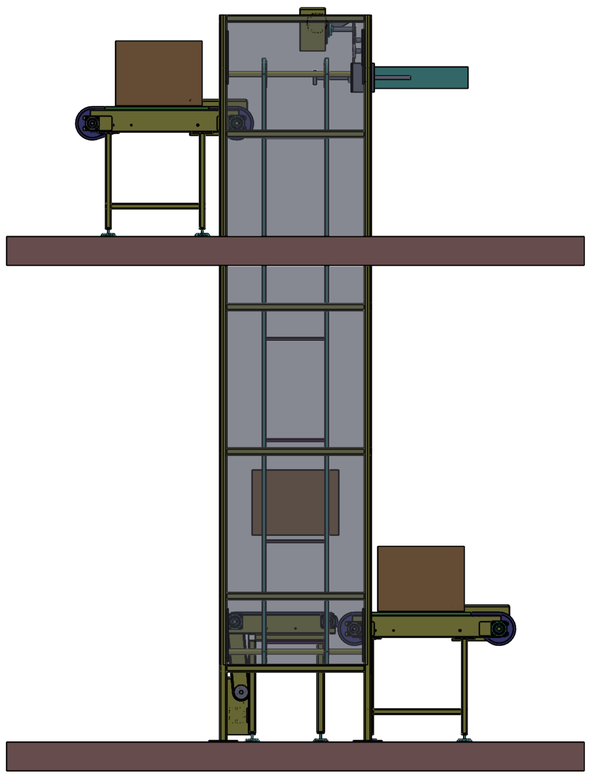

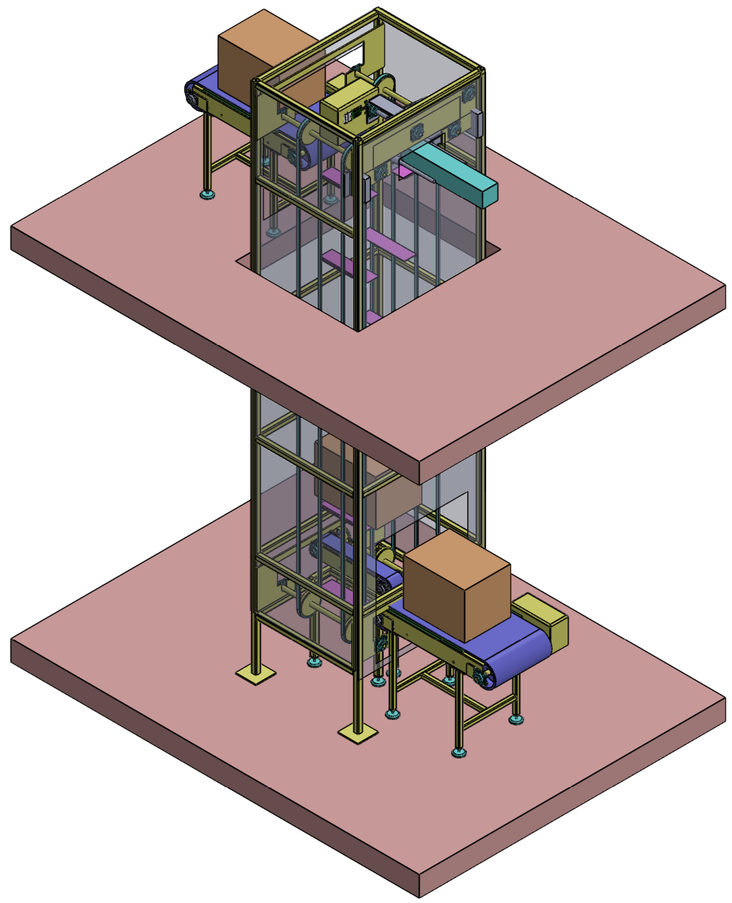

TECHNICAL SPECIFICATION -

(1) MOC - SS 304

(2)BOX LIFTER QTY- 1NO , HEIGHT =5085 mm

(3) MODULAR BELT CONVEYOR FOR LOADING & UNLOADING ,QTY 3 NOS

(4) PRODUCT - BOX 650(L)X450(W)X450(H), WEIGHT = 25KG MAX.

(5) CAPACITY - 12 BOXES PER MINUTE MAXIMUM.

(6) PNEUMATIC PUSHER QTY - 1 NO

(7) MODULAR BELT - SPECTRAPLAST OR EQUIVALENT MAKE

(8) MODULAR BELT - FLAT TOP WITH 50MM PITCH MATERIAL - PP

(9) MANUAL LOADING /UNLOADING HEIGHT = 900+/-50MM


(10) BEARING MAKE - SKF OR EQUIVALENT


(11) GEARMOTOR - BONFIGLIOLI MAKE


NIHVA Technologies Pvt. Ltd.


PLEASE NOTE THAT ALL DIMENSIONS ARE TENTATIVES .
DIMENSIONS MAY CHANGE AFTER FINAL DESIGN .

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:	DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE:	LT000010
DRAWN	SIDDHESHWAR		12.11.2020		
CHK'D	ROHIT K.		12.11.2020		
APP'D					
MFG					
Q.A.					
			MATERIAL:	DWG NO	BOX LIFTER LAYOUT A0
			SS 304		
			WEIGHT:	SCALE:1:20	SHEET 1 OF 4

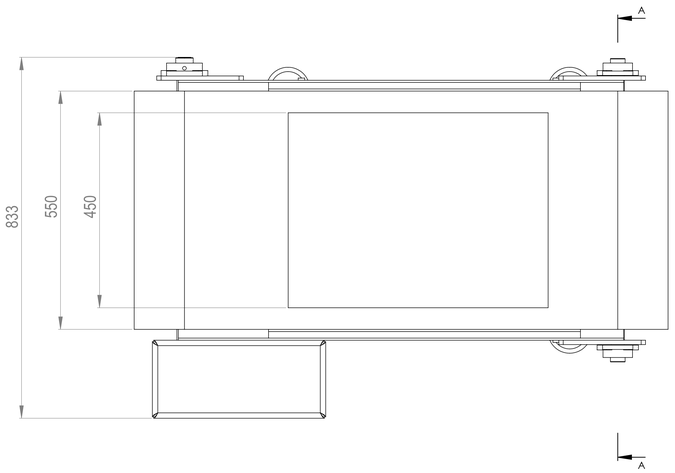

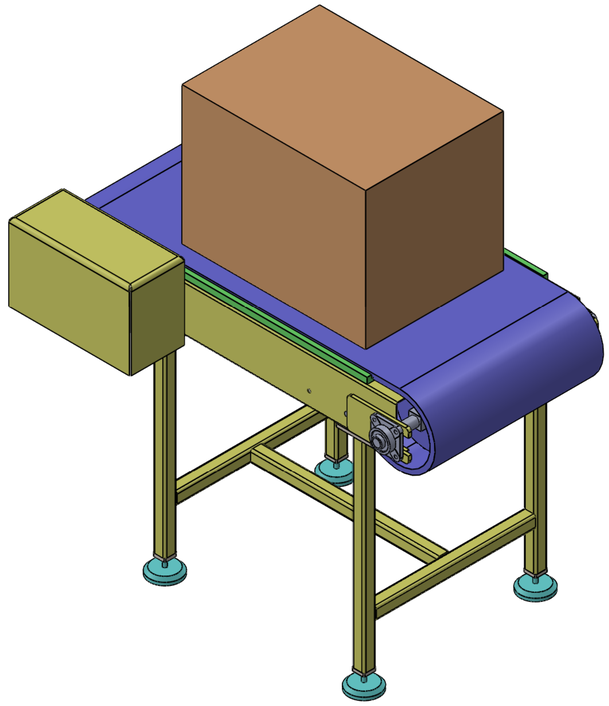

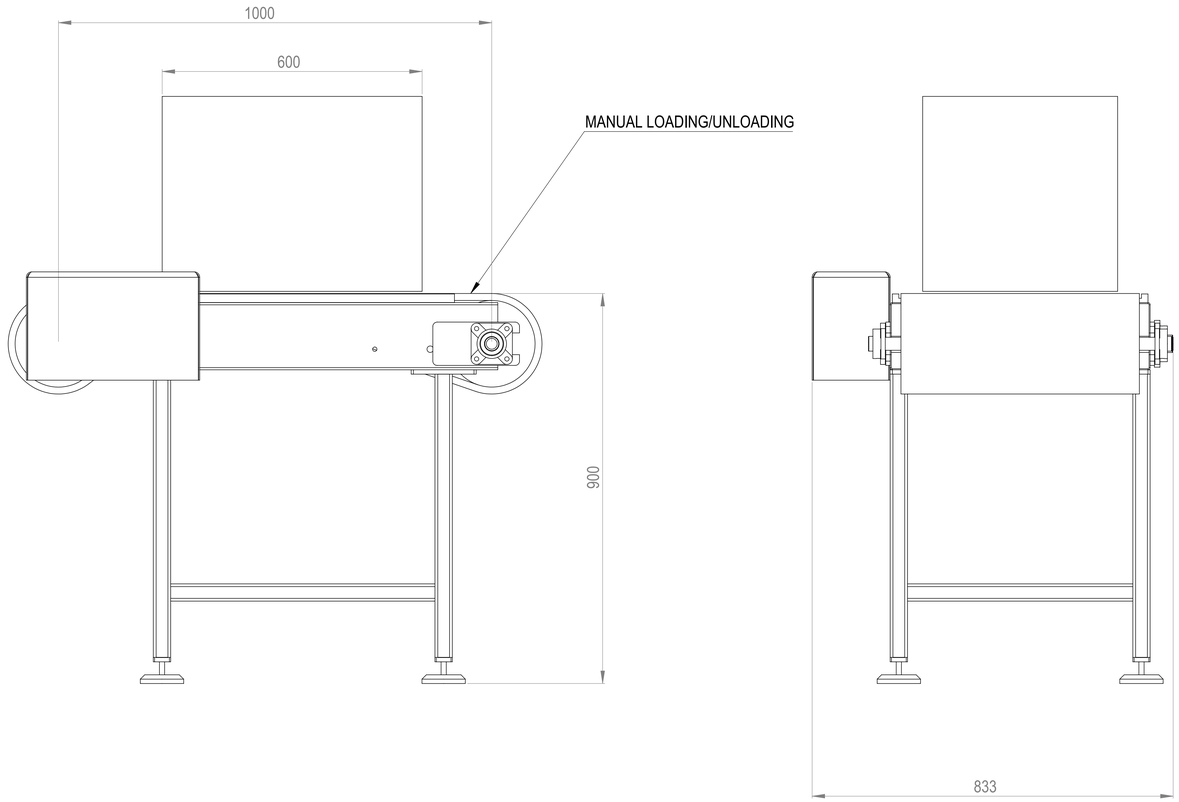

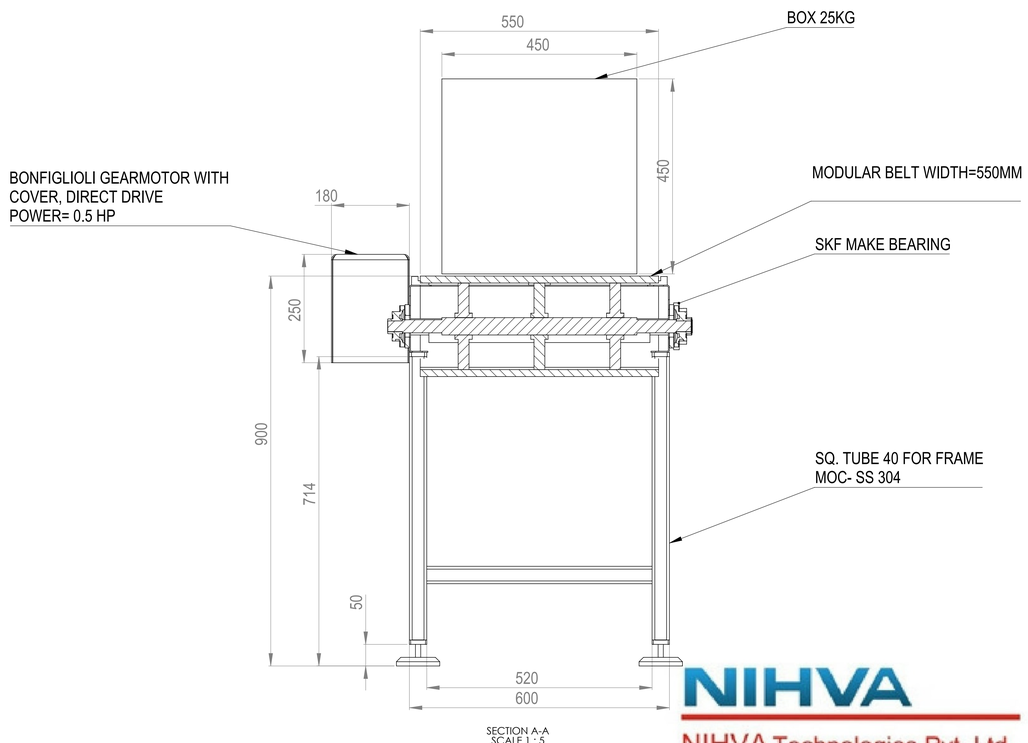

SECTION A-A
SCALE 1 : 5


TECHNICAL SPECIFICATION -


(1) MOC - SS 304
(2) MODULAR BELT CONVEYOR FOR MANUAL LOADING & UNLOADING
(3) PRODUCT - BOX 650(L)X450(W)X450(H), WEIGHT = 25KG MAX.
(4) CAPACITY - 12 BOXES PER MINUTE MAXIMUM.
(5) MODULAR BELT - SPECTRAPLAST OR EQUIVALENT MAKE
(6) MODULAR BELT - FLAT TOP WITH 50MM PITCH MATERIAL - PP
(7) MANUAL LOADING /UNLOADING HEIGHT = 900+/-50MM
(8) BEARING MAKE - SKF OR EQUIVALENT
(9) GEARMOTOR - BONFIGLIOLI MAKE DIRECT DRIVE


PLEASE NOTE THAT ALL DIMENSIONS ARE TENTATIVES .
DIMENSIONS MAY CHANGE AFTER FINAL DESIGN .


NIHVA
NIHVA Technologies Pvt. Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE		TITLE:	
DRAWN	SIDDHESHWAR		12.11.2020			
CHK'D	ROHIT K.		12.11.2020			
APPV'D						
MFG						
Q.A						
		MATERIAL: SS 304			DWG NO. CONVEYOR 1	A0
		WEIGHT:			SCALE:1:20	SHEET 2 OF 4

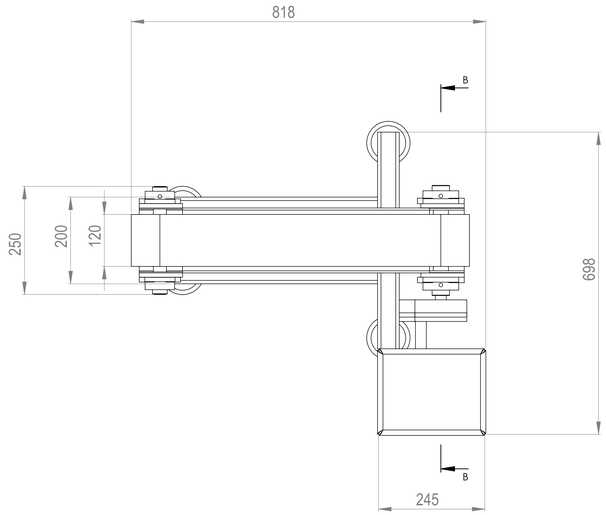

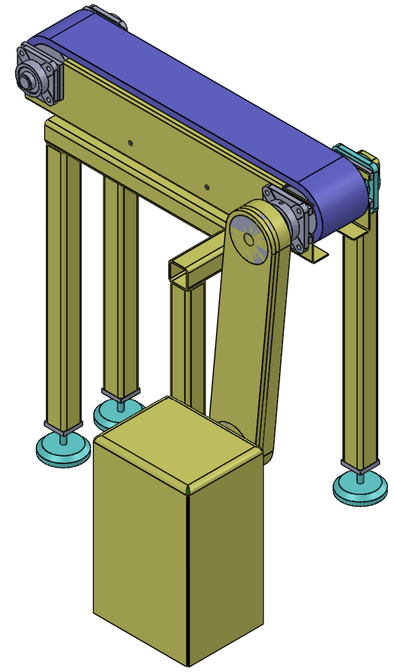

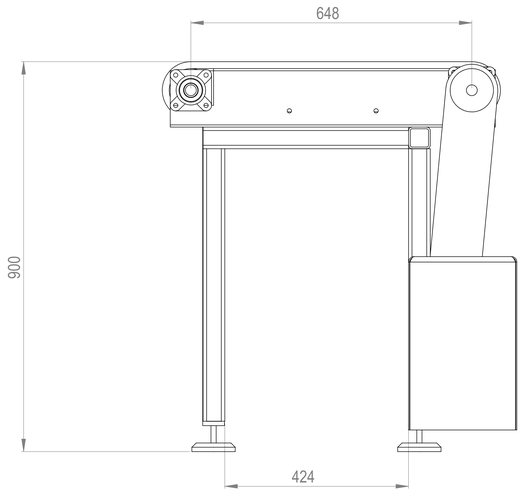

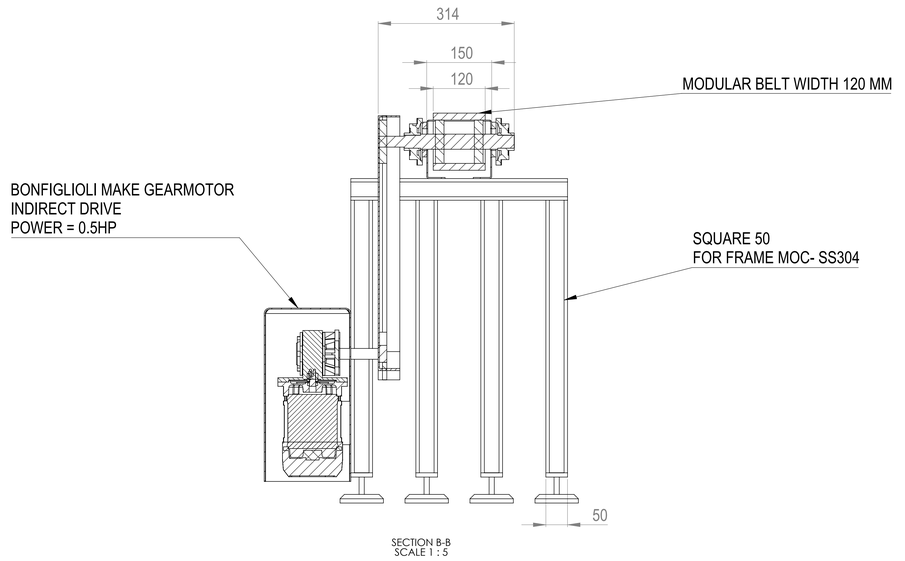

TECHNICAL SPECIFICATION -

(1) MOC - SS 304
(2) MODULAR BELT CONVEYOR FOR MANUAL LOADING & UNLOADING
(3) PRODUCT - BOX 650(L)X450(W)X450(H), WEIGHT = 25KG MAX.
(4) CAPACITY - 12 BOXES PER MINUTE MAXIMUM.
(5) MODULAR BELT - SPECTRAPLAST OR EQUIVALENT MAKE
(6) MODULAR BELT - FLAT TOP WITH 50MM PITCH MATERIAL - PP
(7) MANUAL LOADING /UNLOADING HEIGHT = 900+/-50MM
(8) BEARING MAKE - SKF OR EQUIVALENT
(9) GEARMOTOR - BONFIGLIOLI MAKE INDIRECT DRIVE

PLEASE NOTE THAT ALL DIMENSIONS ARE TENTATIVES .
DIMENSIONS MAY CHANGE AFTER FINAL DESIGN .

NIHVA
NIHVA Technologies Pvt. Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE		TITLE:		
DRAWN	SIDDHESHWAR		12.11.2020				
CHK'D	ROHIT K.		12.11.2020				
APPV'D							
MFG							
Q.A							
			MATERIAL: SS 304		DWG NO. CONVEYOR 2		A0
			WEIGHT:		SCALE:1:20	SHEET 3 OF 4	