ASSA ABLOY Entrance Systems

ASSA ABLOY

High Performance Door Solutions











Segment

Controlled environment

Fabric Doors

RR300
Clean

Product Description

RR300 Clean

Internal door system for air-filtration controlled environments.



Internal stainless steel door system with fabric curtain and solid bottom beam technology designed for controlled environments like pharmaceutical or micro electronics where air filtration is present to control contaminants.

Classified and certified door design includes special sealings to help control and prevent contamination as well as special design elements to adhere to critical cleaning routines.

Integrated electronics with single point of entry allow the door to be integrated neatly into the clean room environment without large alterations of other building elements (wall cabling or coating).

Special options have been designed for clean rooms like touchless impulse activators and safeties to prevent the spread of contaminants and an uninterrupted power supply (UPS) as an additional power source. Profinet or Profibus systems can be also applied to allown integration into automated factories.

Product Design

RR300 Clean

Equipment / Advantages

- Fraunhofer Certified ISO Class 5 for low particle emissions.
- Frauenhofer Certified GMP Class C for design clean-ability and contamination. (columns, curtain, covers, flush elements)
- Low air leakage of 20 m³/h lowers filtration burden and escape of contaminants.
- Small side columns allow for installation in tight spaces.
- Optional touchless "magic switch" and non-contact pre-running photocell instead of safety edge keep the transmission of elements through physical contact to a minimum.
- Integrated electronics, control system and optional UPS within the door frame prevent difficulties with wall coatings or in-the-wall cabling.
- UPS System as a back up power supply available.

Applications

- WC => suited for use up to 50 pa
- For internal openings ISO Class 5 and higher 6-8) DIN EN ISO 14644-1 und GMP Class C and higher (D) and where air filtration is present.
- Medical, Pharmaceutical, Research Facilities / Electronic, Micro Electronic, Watch or Aerospace Manufacturing



Fabric Doors

HS 9020GAT

Gravity: HS9020 ...

HS9020 GAT
cleanroom

Used for Openings:

"AIR TIGHT"

Basic economic door solution with galvanized framework and extra sealings (stainless steel optional)


Up to 4x4

No Wind (pressure ok) (WC1)

Slim Footprint

Sealed bottom profile



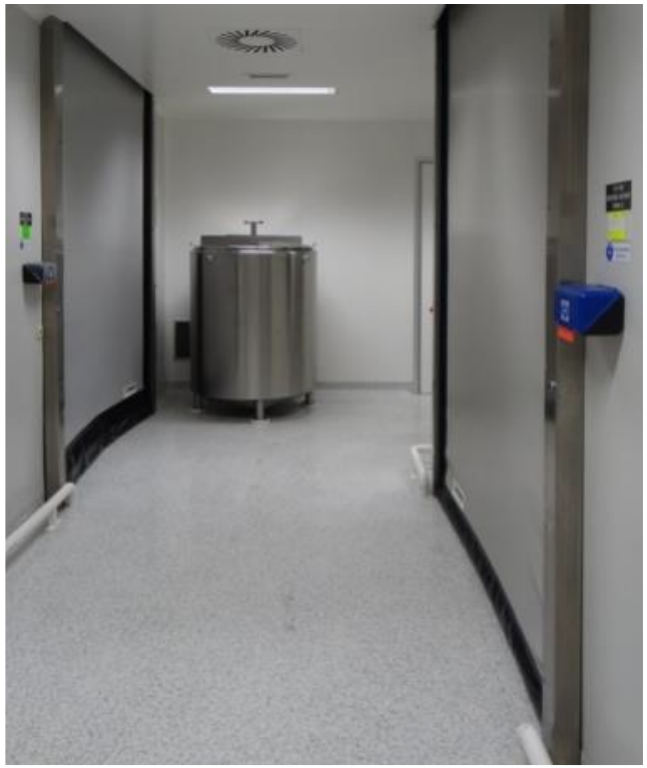

Fabric Doors

HS
9020GHY

Gravity: HS9020 ...

HS9020 GHY
Hygiene/Food

Used for Openings:

"HYGIENE"

Basic economic door solution with stainless steel frame and covers for wash down areas

Up to 4x4

No Wind (WC 1)

Slim Footprint




www.assaabloy.com