
The Tripod Turnstile is ideal for indoor application but nevertheless can be also deployed outside a building preferably under a canopy for protection from the elements.

The Turnstile is aesthetically & ergonomically designed to locate varied access control systems that may be integrated in a discreet yet easy to access manner.

Provision for Red Green indication lamp, a small screen for Greetings such as Good Morning or Good Evening depending on the time of day is a feature that is built into the turnstile. This screen may alternately be used to display card information that is very useful such as Available Credit, Accessable rides, Name of the Movie & Screen No. etc. are just a few of the options available as value addition that may desired. These are options that must be requested for in advance before the products are delivered.

- Housing material : SUS304 stainless steel /1.5mm (hairline finish)
- Passage width : 550mm
- Working Voltage : AC110/AC220±10% V/50±10% Hz
- Drive Technology : Motorised (Brush-less DC Motor with Encoder for Position Sensing)
- Power : 70W
- Environment : Indoor
- Protection grade : IP43
- Emergency : Drop-Arm Feature built-in with Automatic arm reset on resumption of power
- Noise : < 50DB
- MCBF : > 5 million
- Lightning Protection Grade : Level 3
- Temperature rise of motor : ΔT15˚
- Rotation Speed : 0.4s also Pedestrian controlled
- Throughput : Up to 45 people/Minute Excluding Card Validation
- Temperature : -15℃ to 70℃ relative humidity : ≤95% condensation
- Vandal Protection : Auto-reset in case of collusion against arm or forceful access attempt

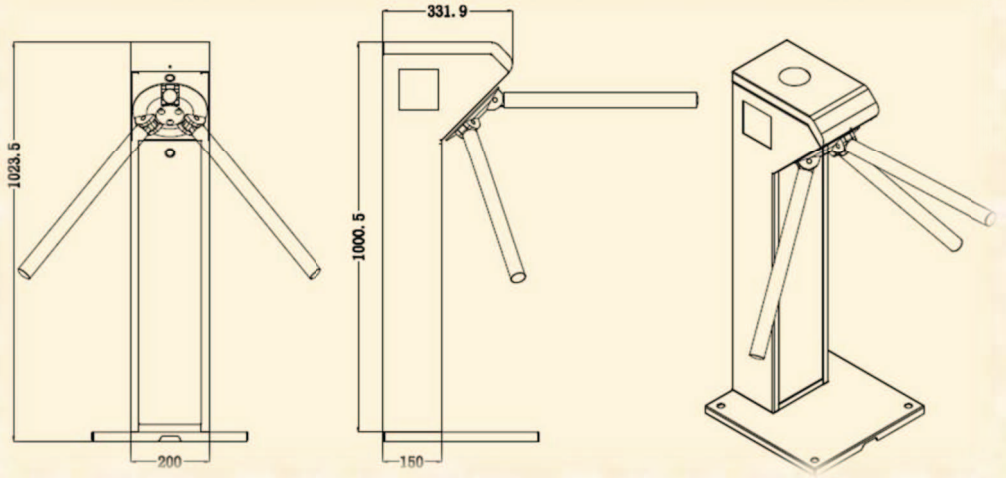

Shlara Automation Pvt. Ltd.
"Bollineni Hillside", Block-19, #408, Perumbakkam, Chennai-600126. +919840294082
Ravi@ShlaraAutomation.Com; www.shlaraautomation.com