

DRAWING

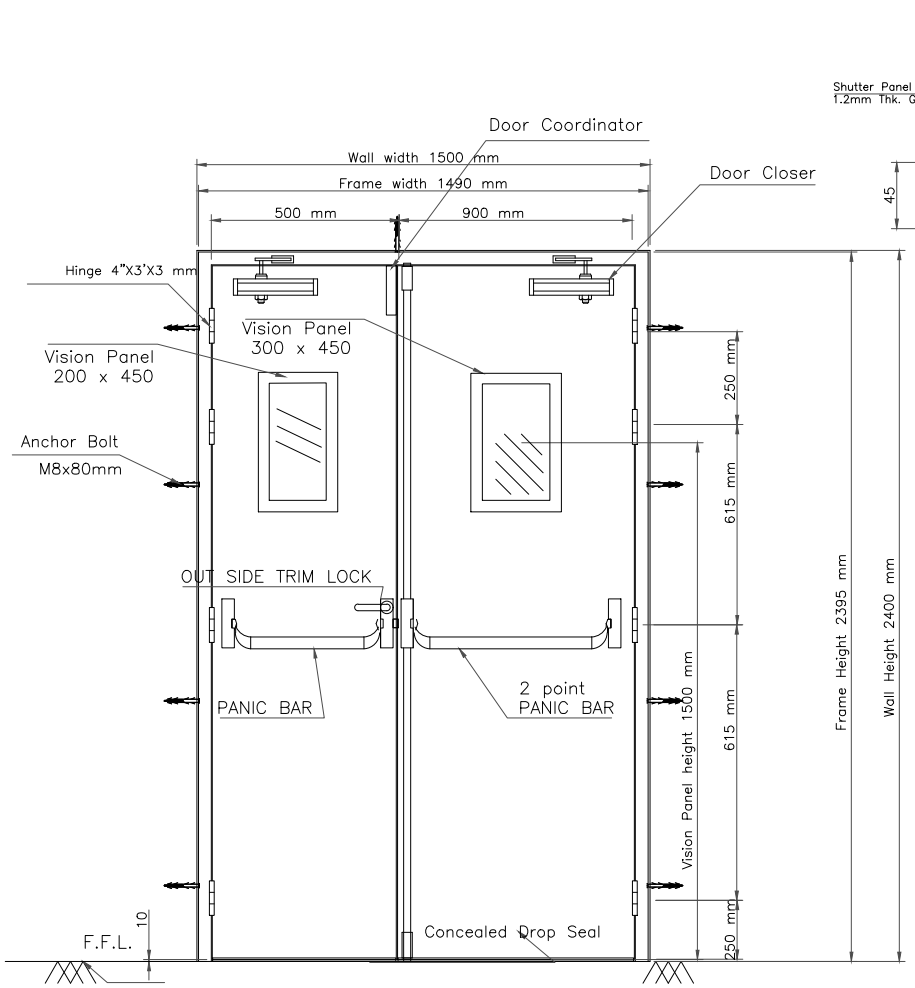

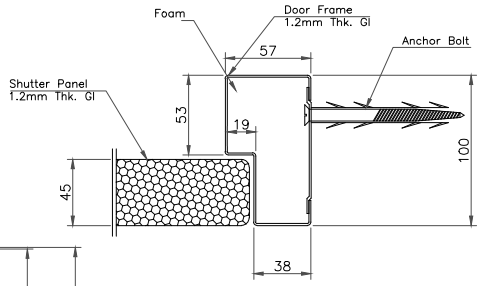

Section S1–S1
Frame Details

HANDING DETAILS

LHR	Inside / Outside key	LEFT HAND REVERSE
RHR	Inside / Outside key	RIGHT HAND REVERSE

NOTES :–

Frame Joint Type :– Bolted joint

Frame Profile(DxH):– 100 x 57mm.

RAL Code :– RAL3020 TRAFFIC RED

Infill :– Honey Comb

Type :– 2Hr un–insulated door as per IS 3614–2021

Hardware/Accessories Description

1. SS BB Hinges "4x3x3"–Geze
2. Door Closer Std Arm – Geze TS 1000
3. One & Two Point Panic Bar with vertical rod– Geze
4. External trim with half EPC – Geze
5. 2 Hr.Fire Rated Vision Glass 300 x 450mm
6. Concealed Drop Seal
7. Door Stopper

NOTE :

DOUBLE EQUAL LEAF DOOR

LEFT HAND REVERSE ACTIVE - 2 NOS

TITLE - DOOR AUTOMATION				NIHVA TECHNOLOGIES PVT.LTD.PUNE	
DWG NO - NTPL-308-PM-02				Website - www.nihva.com	
	NAME	SIGNATURE	DATE	PRODUCT - FIRE RATED DOOR	
DRAWN	J.P.		31-12-2025	PROJECT NO - NTPL- 308	REVISION - 04
CHK'D	B.S.		31-12-2025	SITE LOCATION - CHENNAI	
APPV'D	V.T.		31-12-2025	MATERIAL -	QTY - 2
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'			A2		SHEET 1 OF 1