



DETAIL- A

TRACK MAGNIFYING

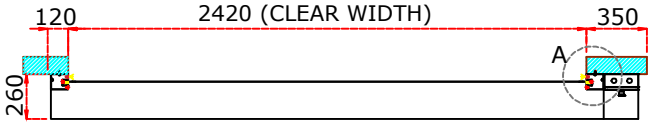


TOP VIEW




DETAIL-B


BOTTOM COUNTERWEIGHT

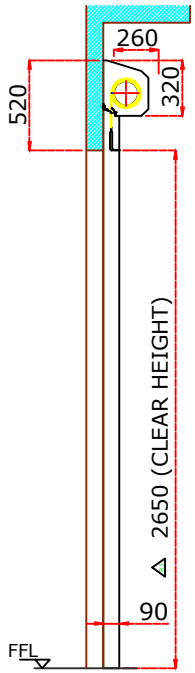

LHS VIEW

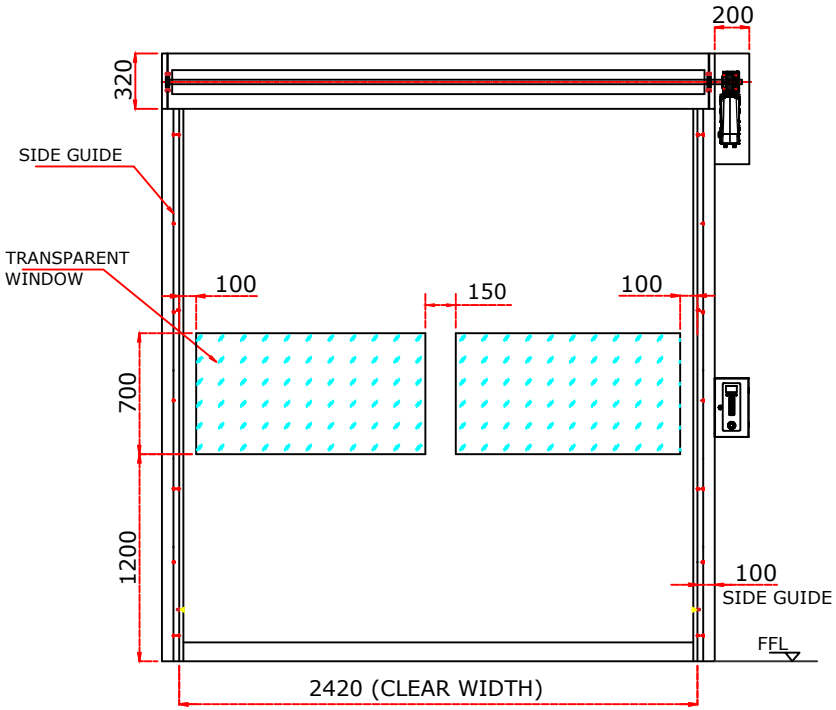

FRONT VIEW

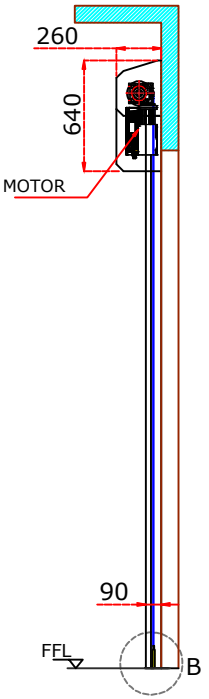

RHS VIEW

DIMENSION :

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
2420 mm	2650 mm	02 NOS

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR CURTAIN	PVC	1.2 MM THIK
MOTOR	——	A2, 1.5 KW, SINGLE PHASE ,220V/60HZ
TRACK & HEAD COVER		MS POWDER COATED

CLIENT CONFIRMATION-:

1) FABRIC COLOUR CODE

2) MOTOR LOCATION- LHS/RHS



ACCESSORIES-

1. SAFETY EDGE SENSOR.
2. MANUAL HAND CRANK.
3. TWO VISION WINDOWS.

IMPORTANT NOTES:

1) ALL DIMENSIONS ARE IN MM

2) THIS DRAWING IS SOLELY MEANT TO BE UNDERSTOOD.

3) RAL CODE 5010

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:-

SELF REPARABLE HIGH SPEED DOOR

CLIENT'S APPROVAL :

CLIENT -

PROJECT - SELF REPARABLE HIGH SPEED DOOR

SITE LOCATION -

DWG. NO. : NIHVA/24-25/SM/241002

SCALE: NTS	WT:	SHEET:1 OF 1	REV- 01

	NAME	DATE	SIGN
DRAWN	S.J.	14.11.2024	
CHECK	S.M.	14.11.2024	
APPROVAL	V.T.	14.11.2024	

If any queries contact : design1@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

Sr.No	DESCRIPTION	REV.NO	DRAWN	DATE
1.	HEIGHT CHANGE 2460mm & 2580mm TO 2650mm	REV.01	S.J.	02.12.2024
2.				

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.